

Aquaglide®

2027

AQUAPARK PRESENTATION



MAKING WATERSPORTS FUN FOR OVER 30 YEARS

The Aquaglide brand has been pioneering innovative ways to have fun on the water for over 30 years. During that time we've earned a reputation, not only for unique and exciting products, but for quality and integrity too.

Over the past decade, Aquaglide has also come to be known as the leader in commercial watersports fun. Our inflatable aquapark systems have changed the face of commercial recreation, and promise to continue that transformation into the next decade as well.

Every aquapark product we make is intended for long-term durability, even under the heavy demands of camp, resort and commercial use, yet is also suitable for residential purposes. Aquaglide designs are carefully vetted and constantly refined based on years of feedback from our global network. Each product is designed and third-party tested to meet the highest standards in quality and product safety.

Designed in the U.S. Pacific Northwest region and tested globally, our mission is to build unique, exciting inflatable aquapark structures that can be used as stand-alone features, or added upon to create the ultimate water playground. Above all, our most satisfying goal is to share the excitement of fun on the water.


Aquaglide

WHAT MAKES AQUAGLIDE THE BEST

Aquapark selection is a big decision. Here are some important points to consider before making your choice.


SUPERIOR DESIGN AND INNOVATION SETS US APART

Aquaglide helped lead the rapid evolution from basic water trampolines to the incredible Aquaparks we have today. Early in the process our design team developed one of the first in-water attachment systems to allow secure modular connections. Called Vario Interloc, this system is the foundation of every Aquaglide park because it allows secure connections to be made quickly and easily. Once our designers released innovative play structures like Summit Express and Jungle Joe, the concept of a modern Aquapark began to emerge, and the next step was to interconnect these massive structures. Although seemingly simple, our team pushed technological boundaries to develop the Speedways in a construction that would stand up to the incredible abuse of the commercial setting. The Speedways led to increasingly complex pathways between even more innovative feature items, all with Aquaglide's unique flair for fun. Aquaglide's relentless pursuit for excitement continues to lead to new innovations like the Universal Monsoon, El Jefe, the Monkey Dome and our new Everest play station. Ultimately, it is our passion for innovative design that drives us to continually push the boundaries of what is possible.

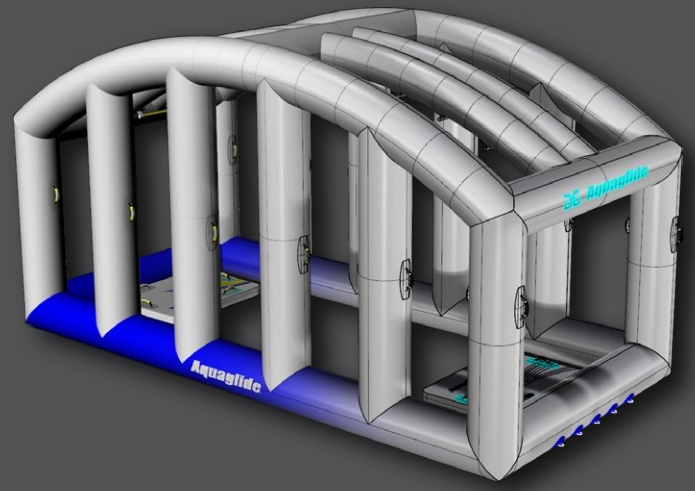

INSPIRE CREATIVE FREE PLAY

Aquaglide products are designed to inspire creative free play. Participants entertain themselves, so less staff is required to constantly oversee organized games and activities. As you look through this catalog you will clearly see that, for us, the fun begins with innovations in product design. Our incentive for creating better solutions is the inspiring feedback we receive from valued customers, like you, who use and appreciate our products every day.

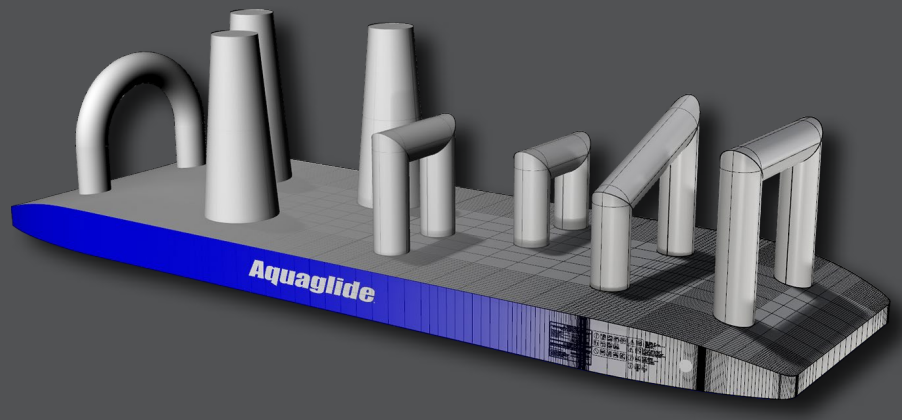

SUPERIOR VALUE


When considering Aquaparks, it is important to analyze the return on your investment over a 3 to 5-year period, not just the initial cost. Sure, you can find cheaper alternatives with copies of some of our items, but most are likely to last less than one season. An Aquaglide Aquapark will outlast any copycat brand 3 to 1. That means three times the lifespan, and a larger and faster ROI. Less problems, less repairs, less PVC in the landfill, and less hassle. That is what you get when you choose Aquaglide.

SUPERIOR MATERIALS

Duratex is the best quality material for commercial Aquaparks, period. Aquaglide works directly with material suppliers to develop exclusive, purpose-built materials. Aquaglide's product range offers the most refined, technologically superior materials on the planet.

SUPERIOR CONSTRUCTION

Superior materials enable exceptional construction techniques. High-quality seam construction is absolutely essential for ensuring the durability and functionality of any commercial Aquapark. That's why all of Aquaglide's seams are hot air-welded, not glued. Our premium Duratex material allows a thicker coating of PVC which ultimately results in higher-quality welds for increased durability and even better airtightness.

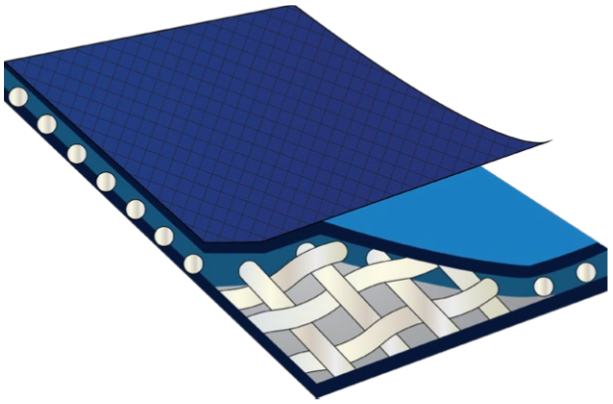

Duratex Material

RELENTLESS REFINEMENT

We continually analyze and improve materials, product specifications and construction techniques based on feedback from commercial Aquaparks around the globe.

• All Aquaglide play structures and I-Beam connectors now use a thicker, more durable Duratex formulation that we call Cx3. Developed to stand up to the rigors of ultra-heavy commercial use, the upgrade to Cx3 means thicker material with 1000d polyester core, better elasticity, superior adhesion and maximum UV protection.

• All Aquaglide Dropstitch connectors are now hot-air welded with 3-layer seams and ultra-durable 2-layer fused construction for maximum longevity. No other brand offers this exclusive technology.



3-YEAR WARRANTY

We stand behind our products. Aquaglide commercial products are not only better built, they are also backed by a 3 year warranty against any defect in material or workmanship. Do the research; you cannot find better products or better support.



THIRD-PARTY CERTIFICATION

Each and every Aquaglide product is submitted to extensive lab and field-testing to ensure that it meets and exceeds the most rigorous product safety standards on the planet. Our products are third-party certified compliant with CPSIA and ISO/EN 25649, the highest possible standards in the business. We strongly encourage customers to ask for proof of compliance when considering any supplier.

TRUST

At Aquaglide we don't just build products, we build trust. This is a process that can only be done only by forging long-term partnerships with real people; in this case everyone from manufacturing suppliers to the end consumer. When you make the decision to purchase Aquaglide you can trust that you will receive safe, high quality products and the highest level of service available.

THE AQUAPARK ADVANTAGE

Aquaglide components have always been designed to easily interconnect. We are proud to have developed a connection system that has proven to be a game changer for our industry. Our Universal Connection System allows unlimited park designs. This octagon shaped platform allows our Speedway and Swimstep connections to connect to all eight sides at once offering multiple angles and unlimited possibilities for Aquapark design. The Universal can be used as a hub, a corner or anything in between. Park layouts can be changed quickly and easily which allows your Aquapark to evolve, so adding new exciting components is easy. With our system, you are able to start with our smallest Aquapark layout, and then use all the existing components as your Aquapark grows larger.





HIGH PRESSURE TECHNOLOGY (HP)

Our HP construction utilizes high quality dropstitch material that can withstand an internal pressure of up to 20 psi (1,4 bar) without damage. This is 4 times the design working pressure! Here we use the HP material at a very acceptable 5 psi (0,34 bar), keeping it so far below its break strength that durability is never an issue.

These products are subject to extreme abuse from toes, heels, knees & elbows. They also take the worst of daily pressure extremes due to thermal expansion from the sun.

Another advantage of HP material is that it offers a smooth, flat, low-profile platform that is much easier to board from the water.

AQUAPARK MOORING


Proper mooring is critical to the success of any aquapark. We recommend using Aquaglide mooring lines and weight recommendations as a starting point. Weight recommendations are intended to keep products in place during a normal range of weather conditions faced by most aquaparks. Even in so-called light-wind areas, storms, squalls and other extreme weather events can happen quickly, and as we like to say, 'luck favors the prepared.'

There are many variables involved in adequate mooring, and our recommendations do not purport to consider all of them. It is the owner/ operator's responsibility to evaluate the needs of their specific site, to monitor anchored items, and to adjust as necessary. Some circumstances may require additional weight or different types of mooring.


Aquaglide weight recommendations are based on the maximum potential wind loads generated by each item at a wind speed of 26 knots (48 km/h, 30 mph), with a modest margin of safety built in. Anchor weights are standardized to make construction simple. Weight recommendations are based on the apparent weight of concrete mooring blocks or weight bags in either salt or fresh water. If significantly stronger winds are forecast, we recommend partially deflating larger items or removing items from the water for storage.

Weight recommendations are meant to specify the anchor weight or equivalent holding power. This provides a guideline for the use of ground screws or earth anchors in cases where these solutions are preferred.

The following information details the best mooring solutions for most aquapark items. If there are site-specific concerns, please feel free to reach us directly or consider working with a mooring specialist aware of your local conditions.

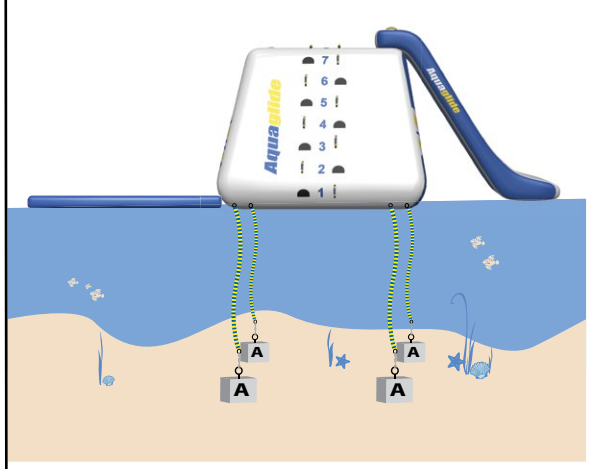

STANDARD MOORING SETUP

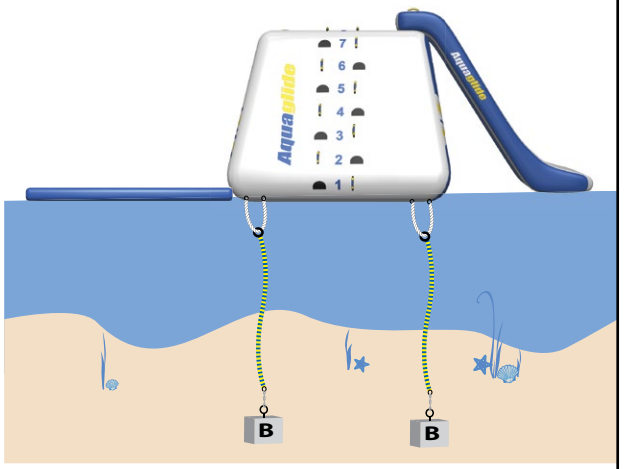


BRIDLE MOORING SETUP


RANGE OF WEIGHTS

Size	Metric	Imperial
Small	100kg	250lb
Medium	250kg	500lb
Large	500kg	1000lb


LETTERS INDICATE TYPE OF MOORING METHOD



Vertical mooring line



2-way bridle
+ vertical mooring line

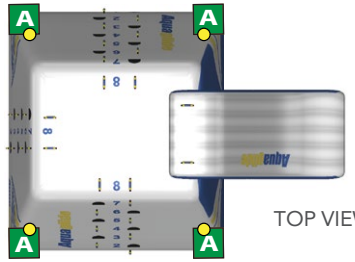

TOP VIEW

= Anchor ring placement

EL JEFE TR

Aquaglide

Signature Aquapark Feature

Item Number: 585225140
SKU: 0790628047661
Dimensions: L 50.4' x W 20' x H 19.8'
(L 15,4m x W 6,1m x H 6,0m)

Box Dimensions:

Box 1: L 47.2" x W 39.4" x H 27.6", 451.9 lbs
(120cm x 100cm x 70cm, 205 kg)
Box 2: L 47.2" x W 39.4" x H 31.5", 509.3 lbs
(120cm x 100cm x 80cm, 231 kg)
Box 3: L 47.2" x W 39.4" x H 31.5", 454.1 lbs
(120cm x 100cm x 80cm, 206 kg)



El Jefe towers over other aquapark features and sets a new benchmark for maximum excitement. Giant entry climbing wall leads up to two breathtaking jump stations or an exhilarating slide with kicker exit. Adrenaline junkies will come rushing back to do it again, and again. El Jefe includes an integrated Trickler Pocket to enable optional slide irrigation for cooler, slipperier sliding and even more fun. Jump station access is controlled by staff with adjustable gates. Two shaded splash caves at water-level use meridian mesh to keep guests cool and the mesh clean. Built in 3 segments for easier handling.

Includes:
- El Jefe (3pcs)
- Trickler Kit
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Aquapark 110v 7.3 Pump
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, jumping and sliding - a high-excitement item.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam/ Tubular

Mooring Diagram

** We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.*

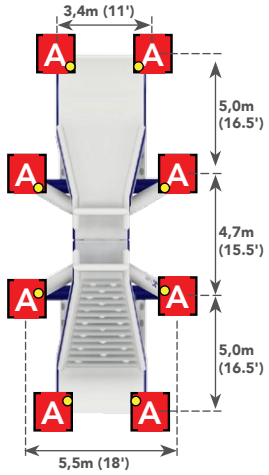

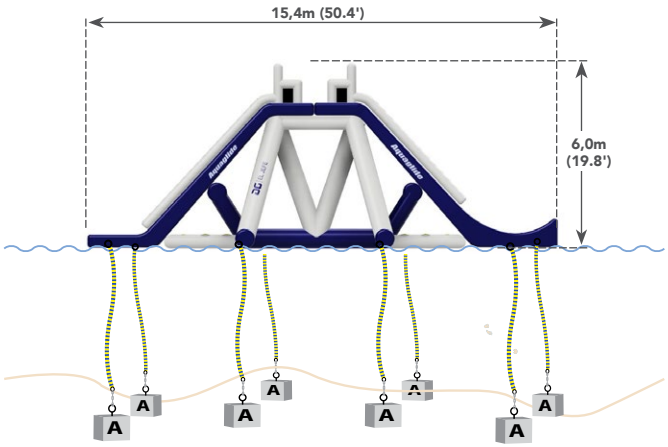

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
12 | 12	1089 kg (2400 lbs.)	3,27m (10.7 ft)	4,5m (15 ft)	4000 kg (8000 lbs.)	500 kg (1000 lbs.)	8	8	8	5 | 5 | 5	28	MAIN[1] 1.8 psi (0,124 bar), BOARDING[2] 1.2psi (0,083 bar), SLIDE[2] 1.2psi (0,083 bar), TUBE[3] 1.8psi (0,124 bar),

© Copyright 2025 Aquaglide | Proprietary + Confidential

LA JEFA TR

Aquaglide

Signature Aquapark Feature

Item Number: 585226124
SKU: 0790628048002
Dimensions: L 76.6' x W 20' x H 19.8'
(L 23,4m x W 6,1m x H 6,0m)

Box Dimensions:

Box 1: L 47.2" x W 39.4" x H 27.6", 451.9 lbs
(120cm x 100cm x 70cm, 205 kg)
Box 2: L 47.2" x W 39.4" x H 31.5", 509.3 lbs
(120cm x 100cm x 80cm, 231 kg)
Box 3: L 47.2" x W 39.4" x H 25.6", 445.3 lbs
(120cm x 100cm x 65cm, 202 kg)
Box 4: L 45.3" x W 23.6" x H 19.7", 198.4 lbs
(115cm x 60cm x 50cm, 90 kg)



Who's the boss? "La Jefa" means business and her name says that SHE's the BOSS. A perfect complement to her partner El Jefe, La Jefa TR offers a large climbing wall leading to two seriously high jump stations. Alternatively, users may opt to drop into a gripping slide with extra-long runout. Thrill-seekers gather like moths to a flame. Integrated Trickler Pocket enables optional slide irrigation. Built in 4 segments for easier handling. Connects in up to 3 places using Interlock 5-Ring connections.

Includes:
- La Jefa TR (4pcs)
- Trickler Kit
- Storage Wrap (each piece)
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump


Recommended Items:
- Aquapark 110v 7.3 Pump
- Rechargeable 120v 25 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, jumping and sliding - a high-excitement item.

Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam/ Tubular/ Dropstitch

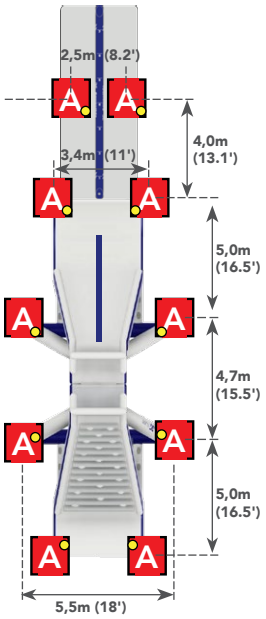

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

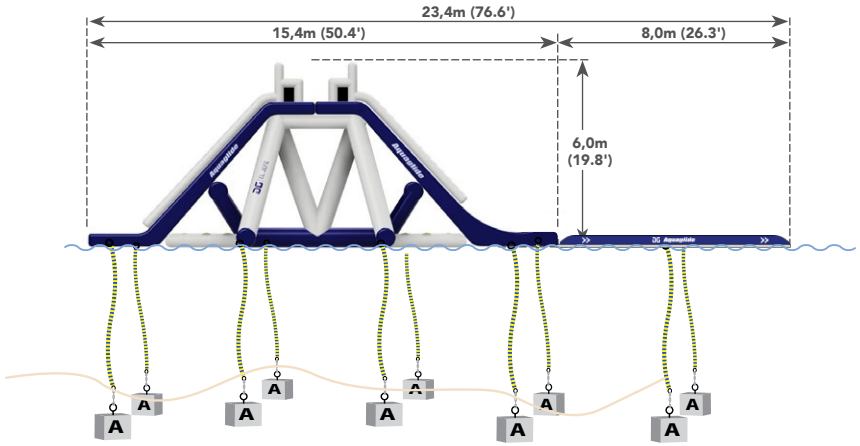

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
12 | 12	1089 kg (2400 lbs.)	3,27m (10.7 ft)	4,5m (15 ft)	5000 kg (10000 lbs.)	500 kg (1000 lbs.)	10	10	10	5 | 5 | 5 | 7 | 7	35	MAIN[1] 1.8 psi (0,124 bar), BOARDING[2] 1.2psi (0,083 bar), SLIDE[2] 1.2psi (0,083 bar), TUBE[3] 1.8psi (0,124 bar), MAT[3] 5.0psi (0,345bar), MAT TUBE[3] 1.8psi (0,124 bar),

© Copyright 2025 Aquaglide | Proprietary + Confidential

MEGA BLAST

Aquaglide

Signature Aquapark Feature

Item Number: 585227101
SKU: 0790628048590
Dimensions: L 33.7’ x W 12.5’ x H 8.9’
(L 10,26m x W 3,82m x H 2,70m)

Box Dimensions:
Box 1: L 47.2" x W 39.4" x H 21.7", 493.8 lbs
(120cm x 100cm x 55cm, 224 kg)



The Mega Blast delivers an adrenaline-pumping challenge that puts participants right in the middle of the action. One participant climbs to the top platform and launches onto the jump pad, sending a seated partner soaring off the opposite end for an exhilarating splashdown. Its unique two-person design creates an exciting, high-energy experience that adds thrill and excitement to any aquapark. The Mega Blast is sure to draw a crowd and keep participants coming back for another blast. Connects to any aquapark using Aquaglide’s Interlock system. Ideally positioned at the end of a track run, the Mega Blast also makes an exciting stand-alone feature..

Includes:
- Mega Blast
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Aquapark 110v 7.3 Pump
- Rechargeable 120v 25 Pump
- Tower Trickler Hose Kit
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, launching - a high-excitement item.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam/ Tubular/ Dropstitch

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

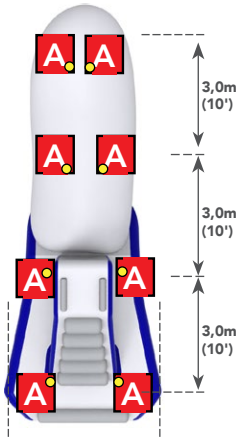

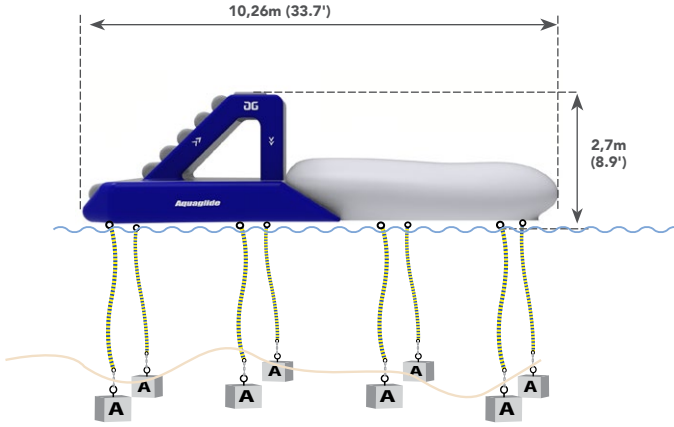

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	3,27m (10.7 ft)	12m (40 ft)	2000 kg (4000 lbs.)	250 kg (500 lbs.)	8	8	8	5	0	MAIN[1] 1.2psi (0,08 bar), ARCH[2] 1.7psi (0,12bar), BAG[3] 0.0-60% FILL

© Copyright 2025 Aquaglide | Proprietary + Confidential

HELIX

Aquaglide

Signature Aquapark Feature

Item Number: 585227103
SKU: 0790628048613
Dimensions: L 30' x W 8.2' x H 5.0'
(L 9,17m x W 2,5m x H 1,52m)

Box Dimensions:
L 59" x W 29.5" x H 20", 216 lbs
(150cm x 75cm x 50cm, 98 kg)



The Helix offers a fun and dynamic way to test balance and coordination on the water. Featuring a series of connected spheres, this piece creates a playful challenge as participants make their way across its rolling surface. Its unique shape adds variety to any aquapark route, encouraging both kids and adults to try again and again. The Helix is a versatile addition that blends movement, excitement, and approachability in one eye-catching feature. Connects to any aquapark using Aquaglide's Interlock system. Ideally positioned at the end of a track run, Helix also makes an excellent stand-alone item.

Includes:
- Helix
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Jumping and leaping as a high-excitement signature item.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam/ Tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

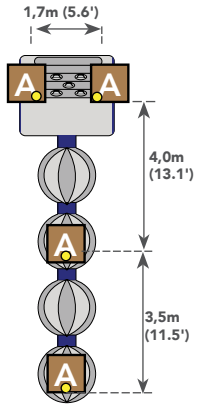

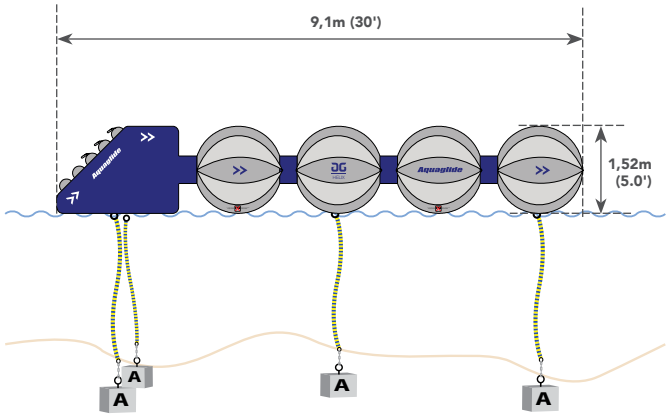

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,66m (5.4 ft)	3,0m (10 ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	6	4	5	0	MAIN [1] 1.2 psi (0,083 bar), BALLS [2] 1.8psi (0,124 bar),

© Copyright 2025 Aquaglide | Proprietary + Confidential

LOG JAM

Aquaglide

Signature Aquapark Feature

Item Number: 585227112
SKU: 0790628048705
Dimensions: L 30' x W 8.2' x H 5.5'
(L 9,2m x W 2,5m x H 1,7m)

Box Dimensions:
L 59" x W 30" x H 18", 202 lbs
(150cm x 75cm x 45cm, 92 kg)



With its playful, log-like shape, the Log Jam turns a simple crossing into a lighthearted challenge. Users must steady their steps across the rounded surface as it shifts and wobbles beneath them, creating moments of surprise and laughter along the way. The approachable design makes it easy to try, but tricky to master—drawing participants back for "just one more" attempt. Connects to any aquapark using Aquaglide's Interlock system. Ideally positioned at the end of a track run, Log Jam also makes an excellent stand-alone item.

Includes:
- Log Jam
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing, running and walking.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam/ Tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

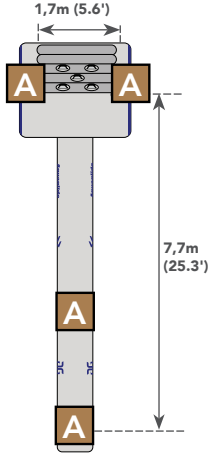

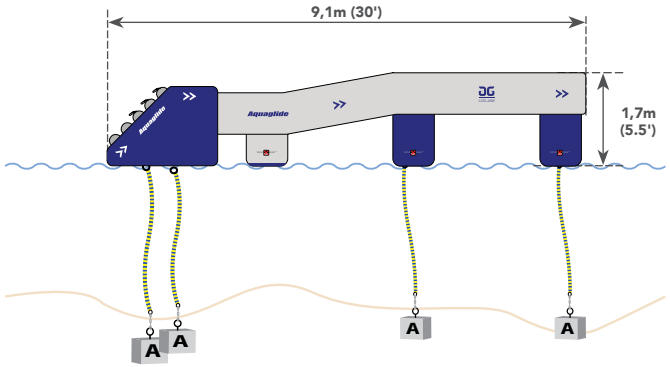

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
5 | 5	454 kg (1000 lbs.)	1,75m (5.7 ft)	3,0m (10 ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	5	4	5	0	MAIN [1] 1.2 psi (0,083 bar), LOG [2] 1.8psi (0,124 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

THOR

Aquaglide

Signature Aquapark Feature



Item Number: 585226158
SKU: 0790628048347
Dimensions: L 30' x W 15' x H 12.7'
(L 9,1m x W 4,6m x H 3,9m)

Box Dimensions:
L 56" x W 48" x H 38", 910.5 lbs
(40cm x 120cm x 95cm, 413 kg)

Thor presents a towering spectacle with huge capacity and diverse features to keep users charging back for more. Two novice up-down climbing routes utilize Tritex material for traction and cooling effects. Once the formidable ascent is made, users choose from one of three jumping platforms located at 9' H (2,74 m), 12' H (3,66m) and 12.7' H (3,87m) respectively. Two integrated high-velocity chute slides and two angled drop slides provide (slightly) milder descent options. Once in the water, avid climbers can test their skills on one of two advanced climbing lines ascending from the water. Connects to any aquapark using Aquaglide's Interlock system. Ideally positioned in the center of a track run, Thor also makes an excellent stand-alone item.

Includes:
- Thor
- Thor
- Repair Kit

Not Included:
- Anchor weights
- mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing and jumping as a high-excitement signature item.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3, 8cm dropstitch

Construction:
Double I-Beam/ I-Band

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

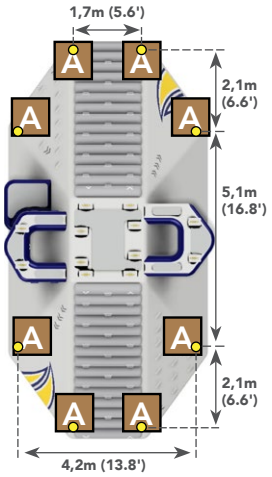

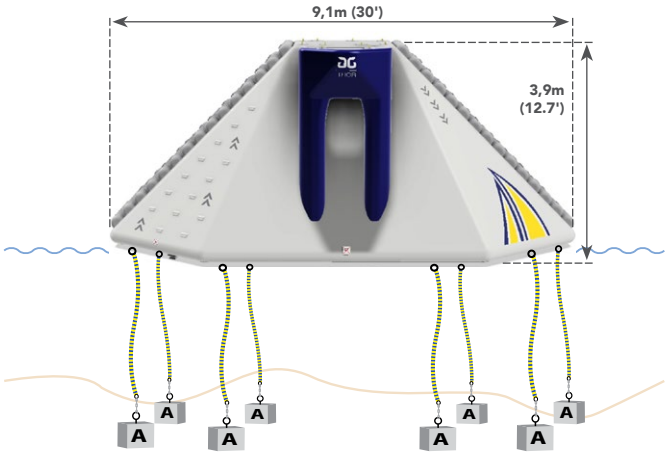

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
12 | 12	1088 kg (2400 lbs.)	2,84m (9.3 ft)	4,5m (15 ft)	2000 kg (4000 lbs.)	500 kg (1000 lbs.)	8	8	8	5 | 5	0	MAIN [1] 0.4 psi (0,028 bar), PLATFORM [2] 0.8psi (0,055 bar),


© Copyright 2025 Aquaglide | Proprietary + Confidential

ANVIL

Aquaglide

Signature Aquapark Feature

Item Number: 585226103
SKU: 0790628047791
Dimensions: L 15.1' x W 15' x H 10'
(L 4,60m x W 4,57m x H 3,1m)
Box Dimensions:
L 48" x W 44" x H 34", 551.2 lbs.
(L 122cm x W 110cm x H 85cm, 250 kg

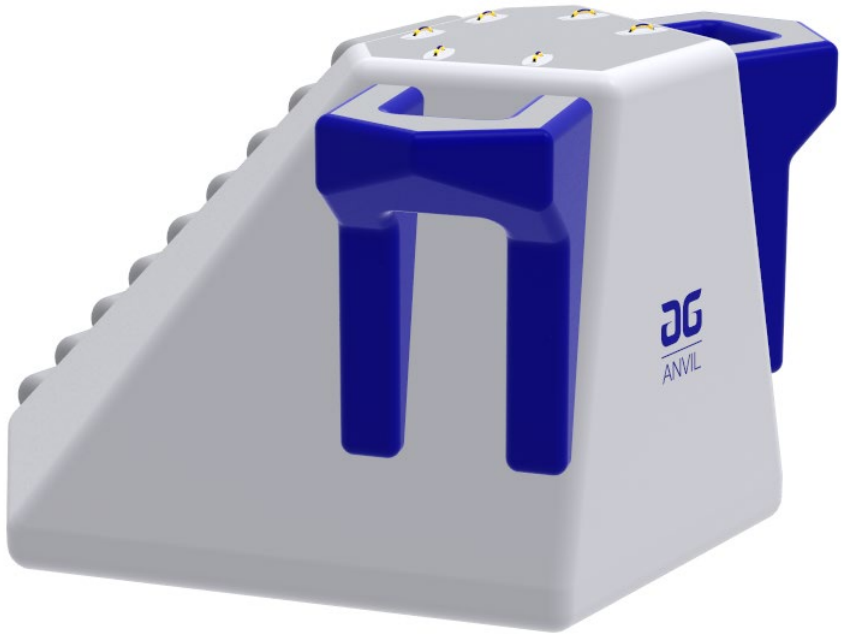

Add serious thrills with this large corner jump feature. Climbing route utilize Tritex material for traction and cooling effects. Once on top users choose from three jumping platforms, one at a towering 10' H (3,1m). The two platforms feature a high-velocity chute slide option for a (slightly) milder descent than a full standing jump. The inside corner offers an exciting tall drop slide while avid climbers test their skills on two advanced lines ascending from the water on the outside corners. Connects to any aquapark using our D-Ring Interlock system. Ideally positioned at the end of a track, this item can also be used as a stand-alone. Connects on one sides using our Interlock connection system.

Includes:
- Anvil
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Jumping and climbing, plus transit to other features.


Warranty:
Limited 3-year Warranty

Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam/ I-Band

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

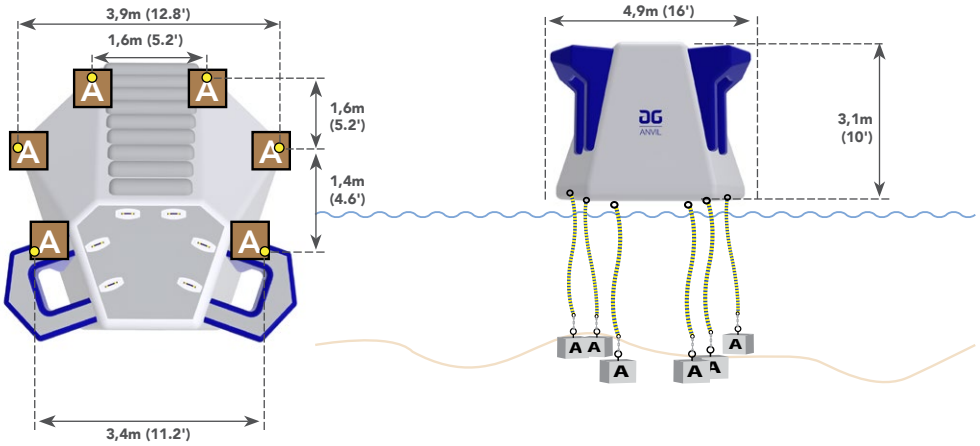

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
8 | 8	726 kg (1600 lbs.)	2,43m (8 ft)	4,5m (15 ft)	1500 kg (3000 lbs.)	250 kg (500 lbs.)	6	6	6	5	0	MAIN [1] 0.4 psi (0,028 bar), CHUTE [2] 0.8psi (0,055 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

HAMMER

Aquaglide

Signature Aquapark Feature

Item Number: 585226118
SKU: 0790628047944
Dimensions: L 14.9' x W 13.1' x H 7.2'
(L 4,55m x W 4,0m x H 2,2m)

Box Dimensions:
L 48" x W 40" x H 24", 335.1 lbs.
(L 120cm x W 100cm x H 60cm, 152 kg)

One step down in size from the Anvil, this significant jump feature still offers plenty of excitement. One novice up-down climbing routes utilize Tritex material for traction and cooling effects. One massive platform at 7.2' H (2,2m) provides a choice of jumping or a high-velocity chute slide for a (slightly) milder descent. Avid climbers ascend from the water with an advanced climbing from the inside corner. Ideally positioned at the end of a track, this item can also be used as a stand-alone. Connects on one sides using our Interlock connection system.



Includes:
- Hammer
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Jumping and climbing, plus transit to other features.


Warranty:
Limited 3-year Warranty

Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam/ I-Band

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

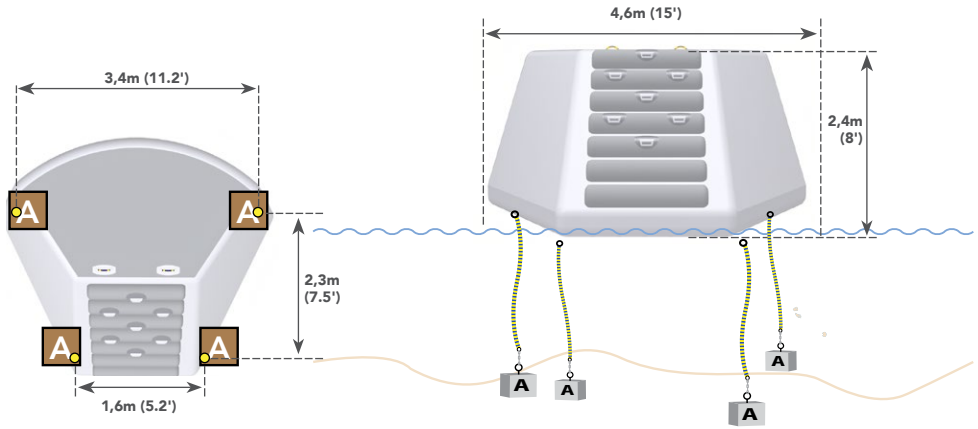

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	2-METER VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	2,00m (6.6 ft)	4,5m (15 ft)	1000 kg (2000 lbs.)	500 kg (1000 lbs.)	4	4	4	5	0	MAIN [1] 0.4 psi (0,028 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential


FREEFALL SUPREME TR

Aquaglide

Signature Aquapark Feature

Item Number: 585226115
SKU: 0790628047913
Dimensions: L 28.2' x W 12.5' x H 16.6'
(L 8,6m x W 3,8m x H 5,1m)
Box Dimensions:
L 52" x W 44" x H 37", 582 lbs. 1pc.
(L 132cm x W 110cm x H 87cm, 264 kg)

As one of the most popular pieces in the Aquaglide commercial line, the Freefall Supreme creates a visual spectacle. At over 16 feet high, the Freefall Supreme features a zero-entry slide that enables multiple users at once, two climbing lines, and a sizeable interior play structure for bouncing, climbing, swinging, and hanging out. Use the Freefall Supreme as a standalone focal point, or connect it to other Aquaglide Aquapark features using the D-Ring Interloc system.

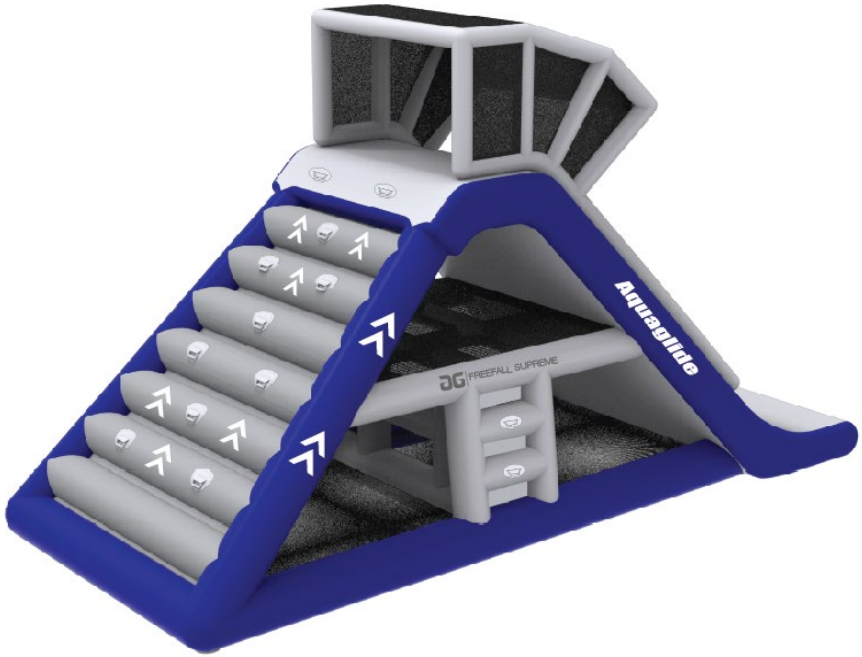

Includes:
- Freefall Supreme TR
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding, climbing, playing, bouncing, and hiding.


Warranty:
Limited 3-year Warranty


Material:
Material – 0.90 mm / 31 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

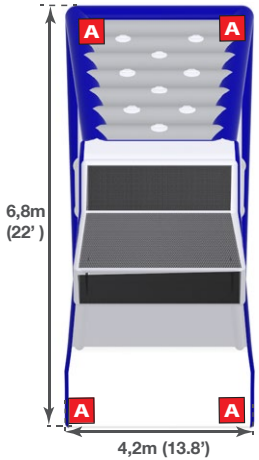

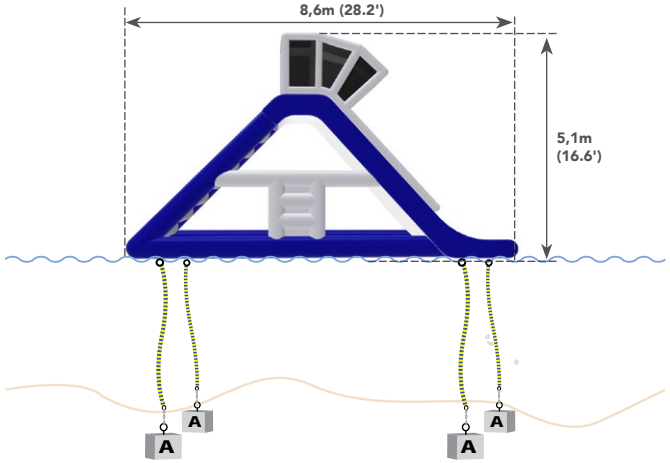

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
12 | 12	1089 kg (2400 lbs.)	2,72m (8.9ft)	4,5m (15ft)	2000 kg (4000 lbs.)	500 kg (1000 lbs.)	4	4	4	5 | 5 | 5	MAIN [1] 1.8 psi (0,124) bar, SLIDE [2] 1.2 psi (0,083 bar), TOP TUBES [3] 1.8 psi (0,124 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential


SUMMIT EXPRESS TR

Aquaglide

Signature Aquapark Feature

Item Number: 585226152
SKU: 0790628048286
Dimensions: L 30' x W 9' x H 16'
(L 9m x W 2,7m x H 5m)
Box Dimensions:
L 52" x W 44" x H 39", 668 lbs. 1pc.
(L 132cm x W 110cm x H 87cm, 303 kg)

Slightly shorter than the Freefall Supreme and not quite as long as the Everest, the Summit Express still provides plenty of opportunity for play. It features a zero-entry slide that enables multiple users at once and a sizeable cave below the slide for playing, bouncing, swinging, and resting. The Summit Express can be used as a standalone focal point feature or connected to other Aquaglide Aquapark features using the D-Ring Interloc system.

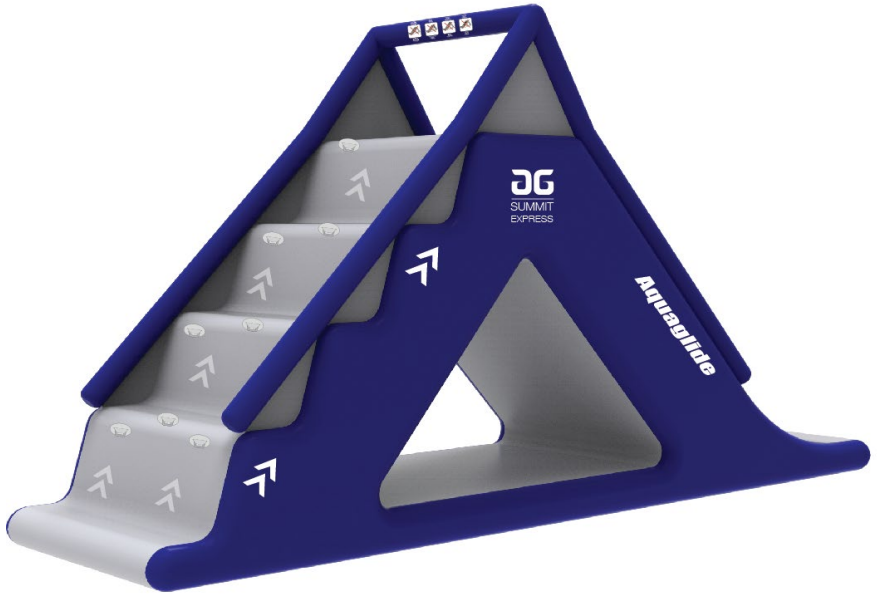

Includes:
- Summit Express TR
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding, playing, bouncing, hanging, and relaxing.

Warranty:
Limited 3-year Warranty


Material:
Material – 0.90 mm / 31 oz Cx3


Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Slide Height: 12'2" (3,71m)

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

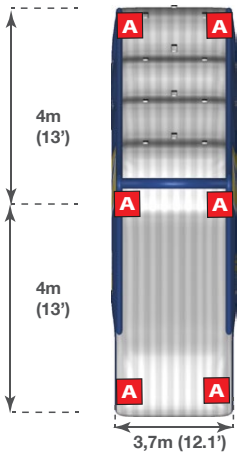

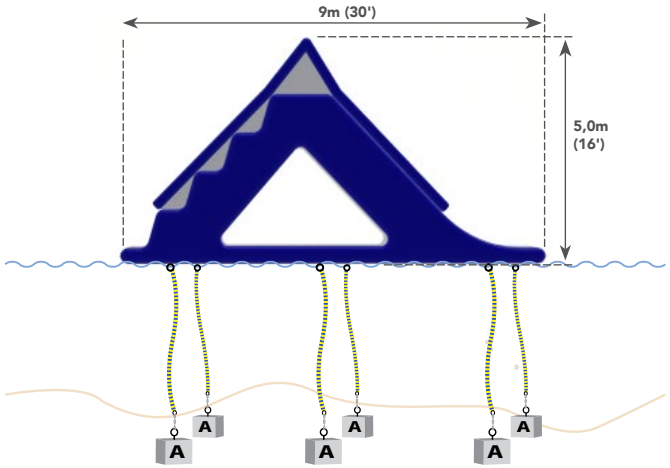

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
12 | 12	1088 kg (2400 lbs.)	2,78m (9.1ft)	4,5m (15ft)	3000 kg (6000 lbs.)	500 kg (1000 lbs.)	6	6	6	5 | 5 | 5	MAIN [1] 0.8 psi (0,055) bar, SIDE TUBES [2] 1.8 psi (0,124 bar), TOP TUBE [3] 1.8 psi (0,124 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

FREEFALL EXTREME

Aquaglide

Signature Aquapark Feature

Item Number: 585226114
SKU: 0790628047906
Dimensions: L 21' x W 9' x H 9.6'
(L 6,4m x W 2,7m x H 3m)

Box Dimensions:
L 46" x W 34" x H 24", 275 lbs. 1pc.
(L 115cm x W 84cm x H 59cm, 125 kg)

Designed to pack excitement into an easily manageable package, the Freefall Extreme features a 10-foot high zero-entry slide that enables multiple users at once and a sizeable cave splash zone below the slide for playing, bouncing, and resting. The Freefall Extreme can be used as a standalone focal point feature or connected to other Aquaglide Aquapark features using the D-Ring Interloc system.



Includes:
- Freefall Extreme
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding, playing, bouncing, hanging, and relaxing.

Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3


Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Slide Height: 9'6" (2,90m)

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

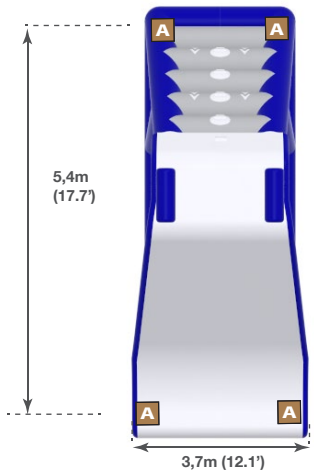

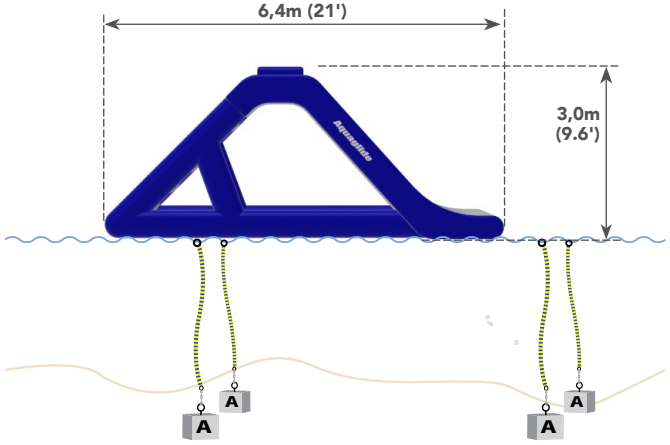

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	2,37m (7.8ft)	4,5m (15ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5 | 5	MAIN [1] 1.8psi (0,083bar), SLIDE [2] 1.2psi (0,069 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

FREEFALL 6

Aquaglide

Signature Aquapark Feature



Item Number: 585226113
SKU: 079062804789 0
Dimensions: L 13' x W 8' x H 6'
(L 4,1m x W 2,4m x H 1,8m)

Box Dimensions:
L 36" x W 17" x H 22", 113 lbs. 1 pc.
(L 91cm x W 43cm x H 56cm, 51 kg)

The Freefall 6 is an exhilarating zero-entry slide that enables multiple users at once that can be connected to other Aquaglide Aquapark features using the D-Ring Interloc system, or use as a standalone feature by adding a Swimstep, or from a pool edge with a Freefall 6 Landing Pad. When combined with a Swimstep or Landing Pad, installation possibilities for the Freefall 6 become endless.

Includes:
- Freefall 6
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding, playing, bouncing, and relaxing.


Warranty:
Limited 3-year Warranty


Material:
0.80 mm / 28 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

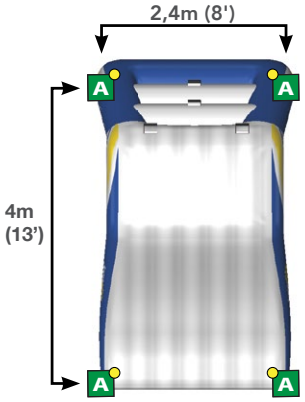

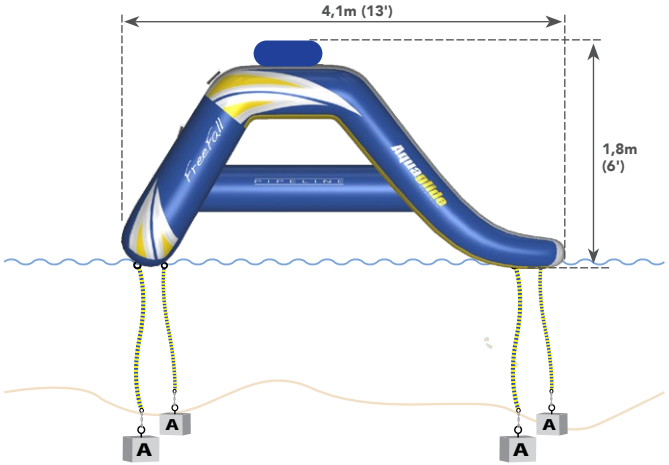

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
3 | 3	272 kg (600 lbs.)	1,79m (5,9ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5	MAIN [1] 1.8psi (0,124 bar), SLIDE [2] 1.2psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

ZULU SLIDE

Aquaglide

Signature Aquapark Feature

Item Number: 585226171
SKU: 0790628048477
Dimensions: L 10.8' x W 6.5' x H 5.3'
(L 3,3m x W 2m x H 1,6m)

Box Dimensions:
L 30" x W 22" x H 14", 74 lbs. 1pc.
(L 76cm x W 56cm x H 36cm, 34 kg)



The Zulu slide features a five-foot-high ladder-style climbing wall and an exhilarating zero-entry slide that makes it an exciting end to any challenge course. The Zulu can accommodate two participants and connect on one side using the Aquaglide D-ring Interloc System with Vario-lock straps. When combined with a Swimstep or Landing Pad, installation possibilities for the Zulu slide are endless.

Includes:
- Zulu
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding, climbing, and jumping.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

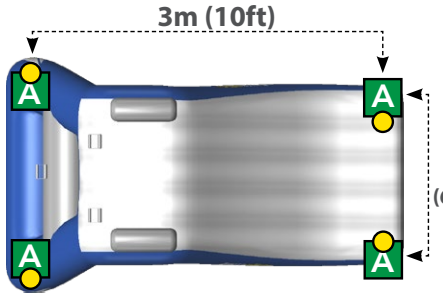

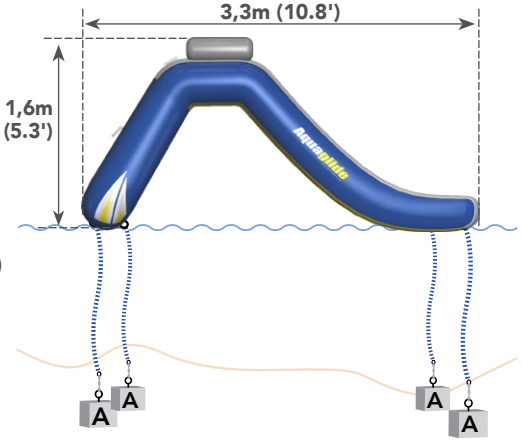

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
1 | 1	114 kg (250 lbs.)	1,67m (5.5ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5	LADDER [1] 2.0 psi (0,138 bar) SLIDE [2] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

JUNGLE JOE TR

Aquaglide

Signature Aquapark Feature

Item Number: 585226122
SKU: 0790628047982
Dimensions: L 21.6' x W 15' x H 12'
(L 6,6m x W 5,5m x H 3,8m)
Box Dimensions:
L 48" x W 40" x H 32", 415 lbs. 1pc.
(L 120cm x W 100cm x H 80cm, 188 kg)



Versatility is the name of the game with the Jungle Joe 2 feature. The pyramidal walls provide a climbing challenge for users of all ages. With multi-level terraces for exploration, zero-entry slide, and an engaging interior splash zone with soaker mesh floor, the Jungle Joe 2 has a little bit of everything. Use the Jungle Joe 2 as a standalone focal point, or connect it to other Aquaglide Aquapark features using the D-Ring Interloc system.

Includes:
- Jungle Joe TR
- Repair Kit

Not Included:
- Trickler kit
- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:
- Trickler Kit
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, sliding, playing, jumping, and resting.

Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3


Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Slide Height: 9'0" (2,74m)

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

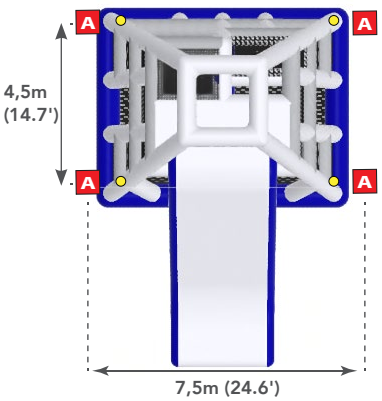

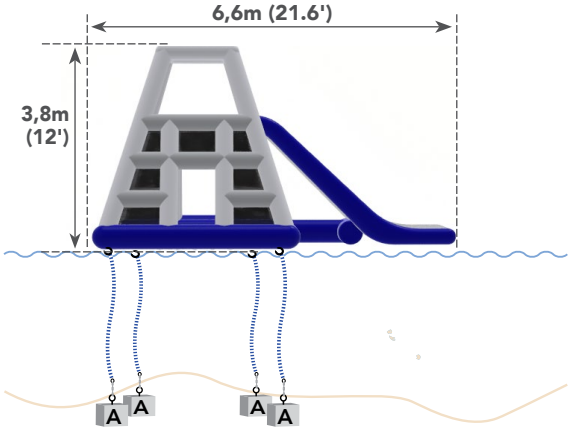

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
10 | 10	907 kg (2000 lbs.)	2,78m (9.1ft)	4,5m (15ft)	2000 kg (4000 lbs.)	500 kg (1000 lbs.)	4	4	4	5 | 5 | 5	MAIN [1] 2.0psi (0,138 bar), UPPER [2] 2.0psi (0,138 bar) SLIDE [3] 1.2psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

JUNGLE JIM


Aquaglide

Signature Aquapark Feature

Item Number: 585226121
SKU: 0790628047975
Dimensions: L 10' x W 10.1' x H 6.8'
(L 3,1m x W 3,1m x H 2,1m)

Box Dimensions:
L 44" x W 32" x H 20", 177 lbs.
(L 110cm x W 80cm x H 50cm, 80 kg)

The Jungle Jim is a stable pyramid structure that features multiple options for climbing, sliding, jumping, and more. The climbing walls on this feature angle inward for convenience and stability, while an interior splash zone with soaker mesh floor provides secondary play options and a place to rest. Use the Jungle Jim as a standalone focal point, or connect it to other Aquaglide Aquapark features using the D-Ring Interloc system.

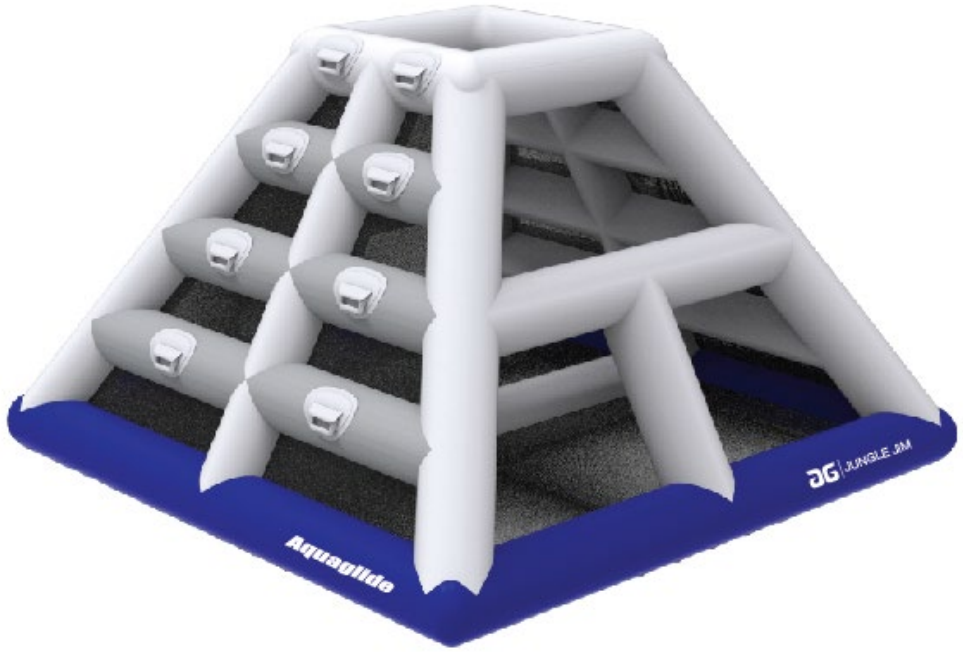

Includes:
- Jungle Jim
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, sliding, jumping, and resting.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

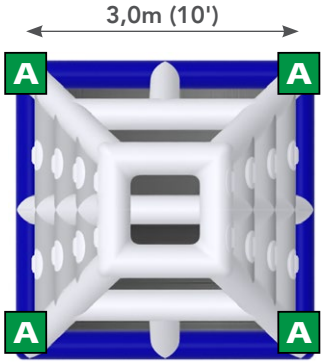

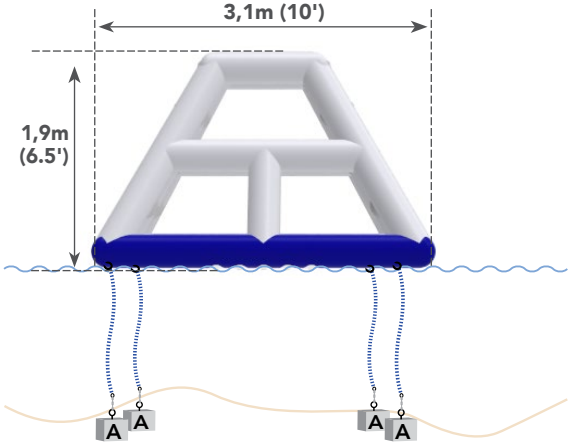

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,90m (6.2ft)	4,5m (15ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 | 5 | 5	MAIN [1] 2.0psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

KING OF THE MOUNTAIN [COMPLETE]

Aquaglide

Signature Aquapark Feature

Item Number: 585226184
SKU: 0790628048811
Dimensions: L 14' x W 8.9' x H 7.4'
(L 4,3m x W 2,7m x H 2,3m)

Box Dimensions:
BOX 1: L 41" x W 33" x H 22", 195.1 lbs.
(L 103cm x W 83cm x H 54cm, 88,5 kg)

BOX 2: L 30" x W 22" x H 10", 56 lbs.
(L 175cm x W 55cm x H 25cm, 25,4 kg)



King of the Mountain is a challenging structure with climbing walls located on multiple sides. Users can race to the top of the semi-pyramidal structure using handholds or rope, then jump or descend using the attached slide. The King of the Mountain can be used as a standalone feature or connected to other Aquaglide Aquapark features on three sides using the D-Ring Interloc system.

Includes:
- King of the Mountain
- 5 Vario Lock straps
- Climbing rope
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, sliding, and jumping.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

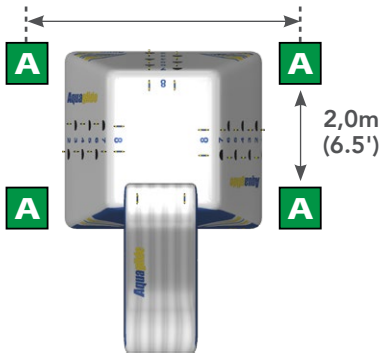

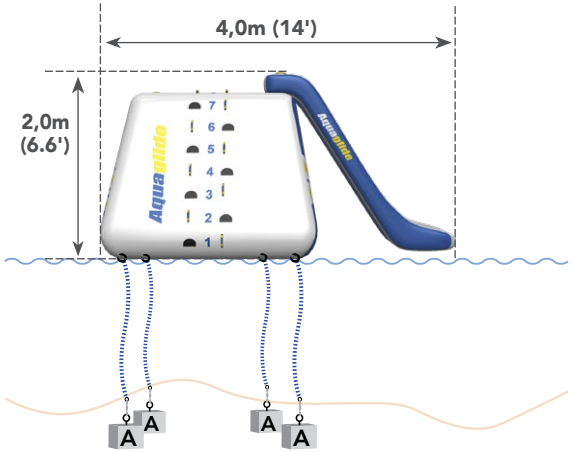

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	BRIDLE	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	2,04m (6.7ft)	4,5m (15ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 | 5 | 6	6 Velcro	Climbing Rope	MAIN [1] 1.0psi (0,069 bar), SLIDE [2] 2.0psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

THUNDERDOME

Aquaglide

Signature Aquapark Feature

Item Number: 585225135
SKU: 0790628047616
Dimensions: L 14.7' x W 14.7' x H 7.5'
(L 4,5m x W 4,5m x H 2,3m)

Box Dimensions:
L 44" x W 28" x H 19", 216 lbs, 1pc.
(L 110cm x W 70cm x H 48cm, 98 kg)



The Thunderdome is a massive, versatile arena structure that can quickly become the centerpiece of any Aquaglide Aquapark. With 32 climbing handles, the Thunderdome can be used as an arena as well as a climbing mountain, and features eight radiused slides, nine mesh crow's nest seats, and an interior lower splash zone. The Thunderdome can be used as a standalone feature or connected to other Aquaglide Aquapark features on all eight sides using the D-Ring Interloc system.

Includes:
- Thunderdome
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, sliding, jumping, and resting.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

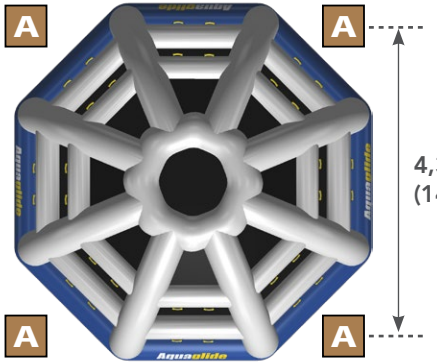

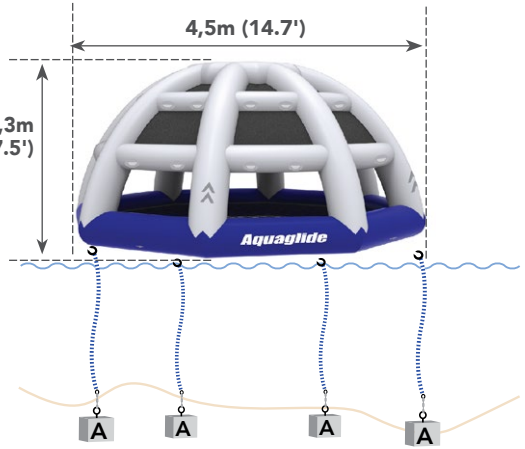

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
10 | 10	907 kg (2000 lbs.)	2,05m (6.7ft)	4,5m (15ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5 | 5 | 5 5 | 5 | 5 | 5	LOWER [1] 2.0 psi (0,138 bar) UPPER [2] 2.5 psi (0,172 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

KAOS

Aquaglide

Signature Aquapark Feature

Item Number: 585225136
SKU: 0790628047623
Dimensions: L 25' x W 25' x H 4'
(L 7,6m x W 7,6m x H 1,2m)

Box Dimensions:
L 45" x W 30" x H 20", 330 lbs. 1pc.
(L 115cm x W 75cm x H 50cm, 150 kg)



With its unique inflatable dome, the Kaos provides a flexible space for users of all ages to climb, bounce, slide, splash, or lounge, and makes a great alternative to a conventional trampoline. Use the Kaos as a standalone feature, or connect it to other Aquaglide Aquapark features on all eight sides using the D-Ring Interloc system.

Includes:
- Kaos
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Bouncing, climbing, splashing, and lounging.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

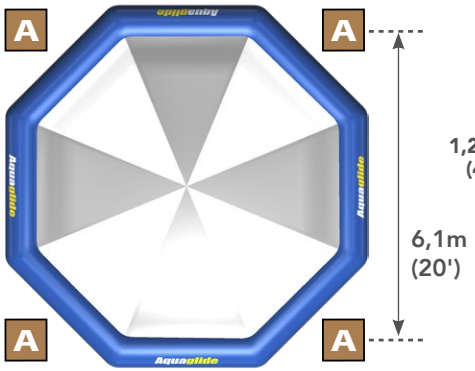

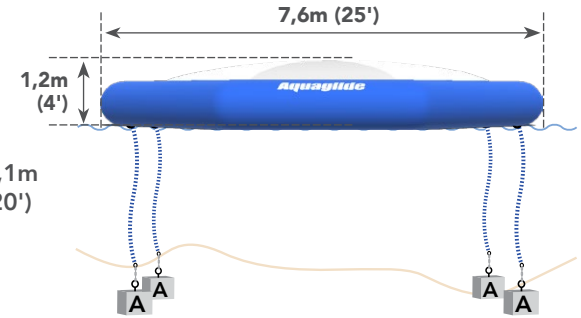

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	2,10m (6.9ft)	3m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5 | 5 | 5 5 | 5 | 5 | 5	MAIN [1] 0.8 psi (0,055 bar) PILLOW [2] 0.3 psi (0,002 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

PARKWAY 30

Aquaglide

Track Features

Item Number: 585226136
SKU: 0790628048125
Dimensions: L 30' x W 6.5' x H 3.5'
(L 9,1m x W 2m x H 1,1m)

Box Dimensions:
L 35" x W 30" x H 15", 162 lbs. 1pc.
(L 87cm x W 75cm x H 38cm, 73,1kg)



The Parkway 30 provides a fun and challenging undulating surface for users to attempt to run, walk, or slide across on their stomachs. Like a bicycle pump track design, the Parkway 30 makes transferring to other aquapark features an exciting and slippery challenge. Connect the Parkway 30 to any Aquaglide Aquapark configuration on all four sides using the integrated D-Ring Interloc system. The Parkway is available in three sizes, the Parkway 30, the Parkway 20, and the Parkway 10.

Includes:
- Parkway 30
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

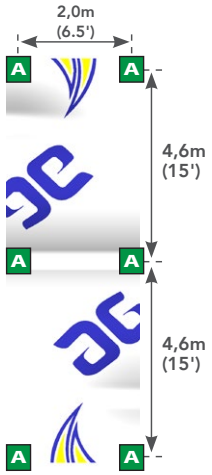

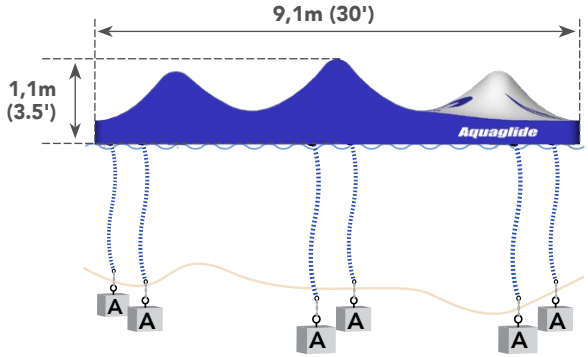

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
6 | 6	554 kg (1200 lbs.)	1,47m (4.8ft)	3m (10ft)	600 kg (1500 lbs.)	100 kg (250 lbs.)	6	6	5 | 5 5 | 5	0	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SPRINGWAY 30

Aquaglide

Track Features

Item Number: 585227111
SKU: 0790628048699
Dimensions: L 30.0' x W 8.2' x H 5.2'
(L 9,14m x W 2,50m x H 1,58m)

Box Dimensions:
L 45.3" x W 29.5" x H 17.7", 238.5 lbs.
(L 115cm x W 75cm x H 45cm, 108,2kg)



The Springway 30 turns momentum into adrenaline with a jump that demands total commitment. Featuring a gap wide enough to make even confident users pause at the edge, it tests timing and courage as participants leap to clear the open water between platforms. The inviting arch design dares challengers to fly across, delivering pure excitement with every landing. Integrated seamlessly into any track run using Aquaglide's Interlock system, the Springway Series brings three options to any aquapark configuration.

Includes:
- Parkway 30
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Running, leaping, ingress/egress for enclosed aquapark rings.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

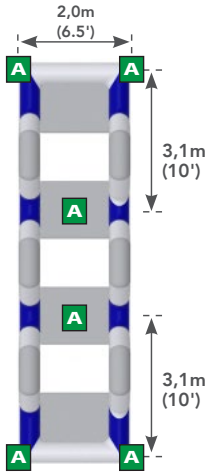

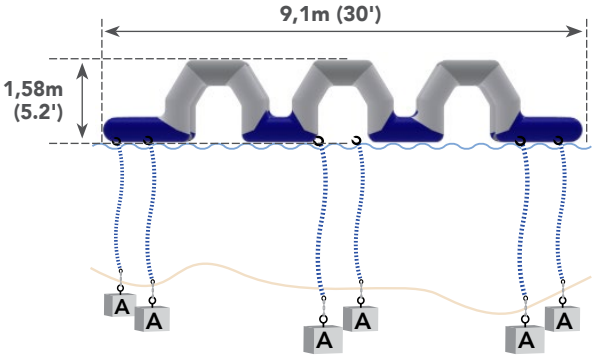

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
6 | 6	554 kg (1200 lbs.)	1,69m (5.5ft)	3m (10ft)	600 kg (1500 lbs.)	100 kg (250 lbs.)	6	6	5 | 5	0	MAIN [1] 1.5 psi (0,103 bar), STEP [2] 5.0 psi (0.345 bar) STEP [3] 5.0 psi (0.345 bar) STEP [4] 5.0 psi (0.345 bar) STEP [5] 5.0 psi (0.345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

RIDGEWAY 20

Aquaglide

Track Features

Item Number: 585225145
SKU: 0790628047715
Dimensions: L 20' x W 8' x H 6'
(L 6,10m x W 2,44m x H 1,83m)

Box Dimensions:
L 47.2" x W 39.4" x H 27.6", 340.8 lbs.
(L 120cm x W 100cm x H 70cm, 154,6 kg)



Ridgeway 20 is a track obstacle that brings its own style of climbing, jumping and balance to the 20-foot track footprint. A quick scramble to the top presents a myriad of options. Even those planning to head across the two balance logs and straight for the downclimb are drawn by the whimsical stump jumping platforms and logs, making this one of the most 'session-able' 20-foot features in the range. Used to promote continuous play as part of an aquapark track run.

Includes:
- Ridgeway 20
- Storage Wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines

Recommended Items:
- Hurricane 110v 3.6 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)
- Boarding platform
- Inflation pump

Best For:
Climbing, bouncing, jumping.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam with Welded 3-Layer Seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

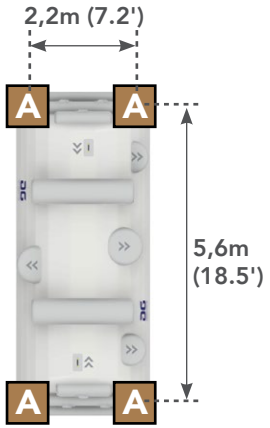

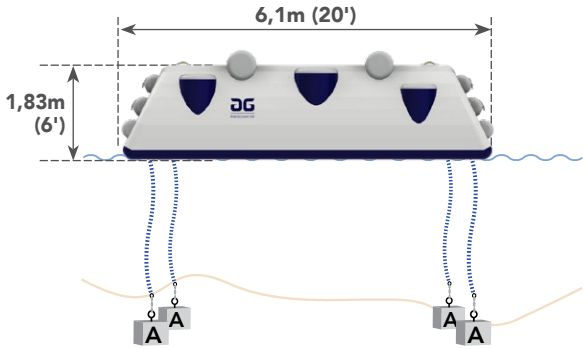

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,82 (6.0ft)	3,0m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

KNOCKOUT 20

Aquaglide

Track Features

Item Number: 585227106
SKU: 0790628048644
Dimensions: L 20' x W 10' x H 10.6'
(L 6,10m x W 3,05m x H 3,22m)

Box Dimensions:
L 47.2" x W 39.4" x H 21.7", 424.4 lbs.
(L 120cm x W 100cm x H 55cm, 192,5 kg)



The Knockout brings a playful, dynamic challenge to any aquapark track. Participants navigate their way through a series of hanging bags that gently sway with the wind, creating an unpredictable obstacle course that's fun to run, dodge, weave, and play through with friends. Whether racing to the other side or simply seeing who can make it through without getting knocked out, Knockout adds movement, interaction, and excitement to the track. Connects to any aquapark using Aquaglide's Interlock system and is designed to be positioned within a track for an engaging challenge.

Includes:
- Knockout 20
- Storage Wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines

Recommended Items:
- Hurricane 110v 3.6 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)
- Boarding platform
- Inflation pump

Best For:
Running, dodging, weaving.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam with Welded 3-Layer Seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

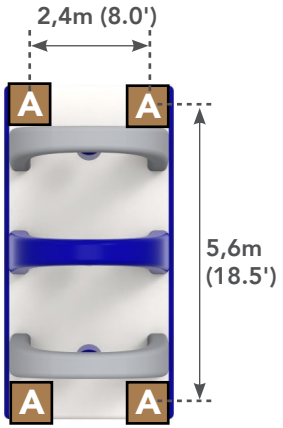

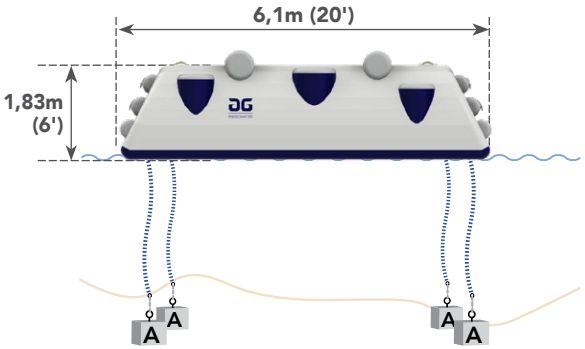

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,05 (3.4ft)	3,0m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5	MAIN [1] 1.5psi (0,083 bar) ARCH [2] 1.7 psi (0.117 bar) BAG [3] 1.0 psi (0.069 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential


PATHFINDER 20

Aquaglide

Track Features

Item Number: 585227113
SKU: 0 7 90628 04888 0
Dimensions: L 20.3' x W 7.0' x H 1.6'
(L 6,18m x W 2,13m x H 0,48m)

Box Dimensions:
L 66" x W 20" x H 11", 103.6 lbs.
(L 170cm x W 48cm x H 28cm, 47 kg)

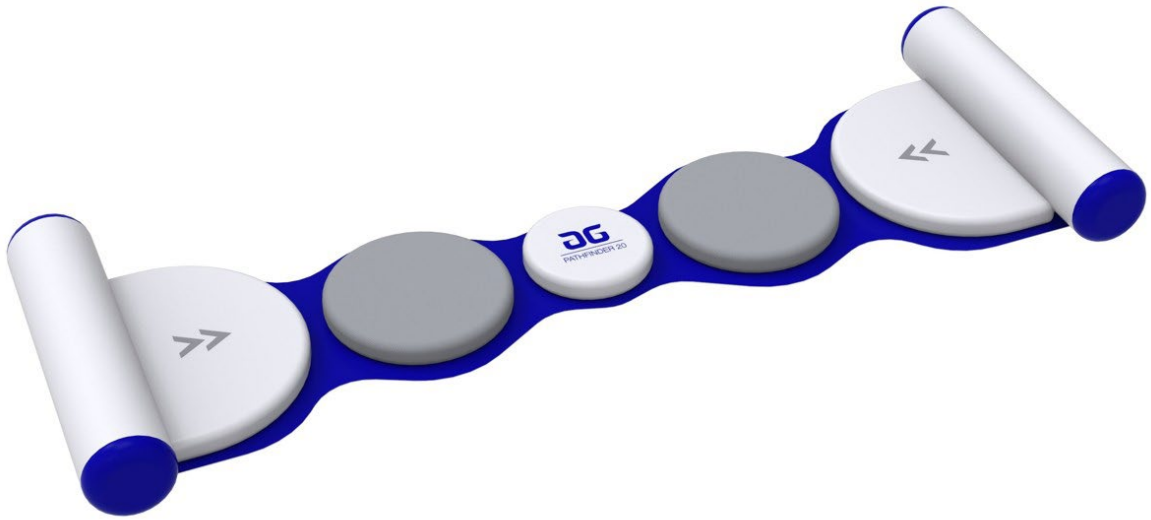

The Pathfinder 20 creates a straightforward but engaging challenge that keeps participants moving through the track. A series of connected stepping pads guide participants across the feature, requiring balance and deliberate footwork to make it from one end to the other. Its open layout makes it an easy-flowing track element that adds variety without interrupting the pace of the course. Connects to any aquapark using Aquaglide's Interlock system and is designed as a track piece for building longer, more dynamic layouts.

Includes:
- Pathfinder 20
- Storage Wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines

Recommended Items:
- Hurricane 110v 3.6 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)
- Boarding platform
- Inflation pump

Best For:
Balancing, leaping, running.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Dropstitch / Tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

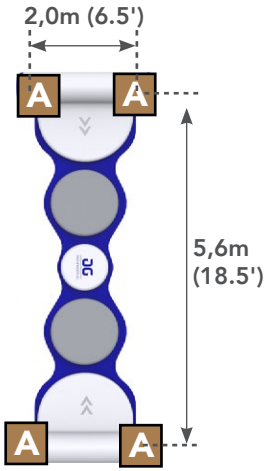

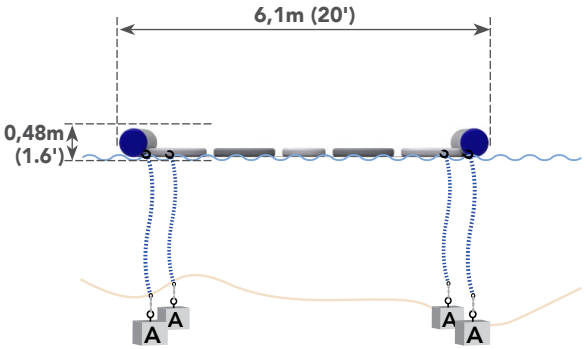

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE TUBES [1]	STEPS [2]
4 | 4	363 kg (800 lbs.)	1,14m (3.7ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	2.0 psi (0,183 bar)	5.0 psi (0.345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SPRINGWAY 20

Aquaglide

Track Features

Item Number: 585227110
SKU: 0790628048682
Dimensions: L 20.0′ x W 8.2′ x H 5.2′
(L 6,10m x W 2,50m x H 1,58m)

Box Dimensions:
L 45.3" x W 29.5" x H 11.8", 163.8 lbs.
(L 115cm x W 75cm x H 30cm, 74,3 kg)



The Springway 20 turns momentum into adrenaline with a jump that demands total commitment. Featuring a gap wide enough to make even confident users pause at the edge, it tests timing and courage as participants leap to clear the open water between platforms. The inviting arch design dares challengers to fly across, delivering pure excitement with every landing. Integrated seamlessly into any track run using Aquaglide's Interlock system, the Springway Series brings three options to any aquapark configuration.

Includes:
- Springway 20
- Storage Wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines

Recommended Items:
- Hurricane 110v 3.6 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)
- Boarding platform
- Inflation pump

Best For:
Running, leaping, ingress/egress for enclosed aquapark rings.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam with Welded 3-Layer Seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

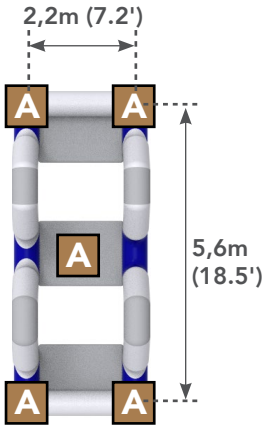

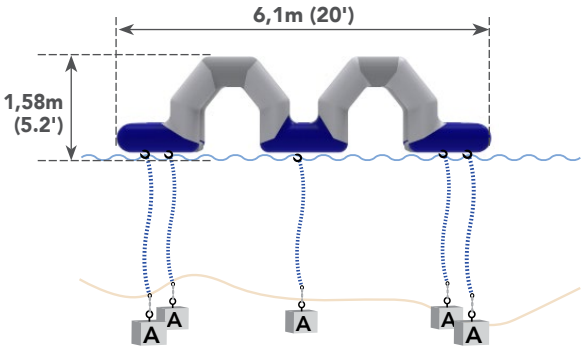

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
3 | 3	272 kg (600 lbs.)	1,69 (5.5ft)	3,0m (10ft)	500 kg (1250 lbs.)	100 kg (250 lbs.)	5	5	4	5 | 5	MAIN [1] 1.2psi (0.103 bar) STEP [2] 5.0 psi (0.345 bar) STEP [3] 5.0 psi (0.345 bar) STEP [4] 5.0 psi (0.345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

HATCHWAY 20

Aquaglide

Track Features

Item Number: 585225142
SKU: 0790628047685
Dimensions: L 20' x W 6.5' x H 5.6'
(L 6,10m x W 1,98m x H 1,70m)

Box Dimensions:
L 45.3" x W 29.5" x H 13.0", 178.1 lbs.
(L 115cm x W 75cm x H 33cm, 80,8kg)



Multiple pathways through, over or around this obstacle make Hatchway a unique and interesting challenge. More thoughtful users may choose to tiptoe around the outside, but the quick and nimble are certain to slide through or hurdle over the hatchway wall. Either way, Hatchway 20 promotes continuous play as part of an aquapark track run, connecting to other Aquaglide features on 4 sides using the Interlock D-Ring system.

Includes:
- Hatchway 20
- Storage Wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines

Recommended Items:
- Hurricane 110v 3.6 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)
- Boarding platform
- Inflation pump

Best For:
Sliding obstacle.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam with Welded 3-Layer Seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

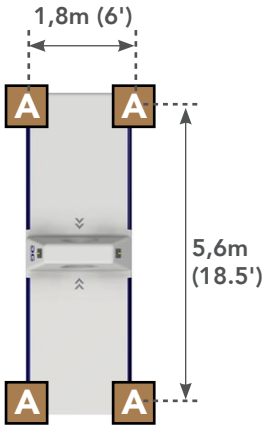

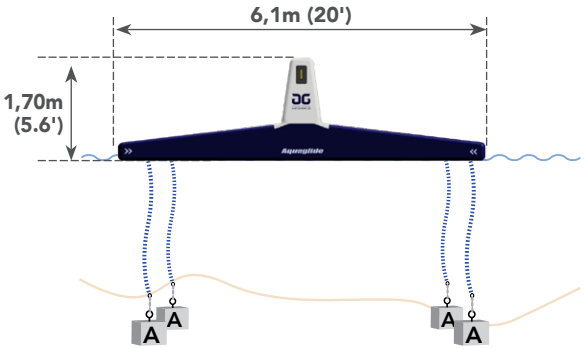

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,75 (5.7ft)	3,0m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5 | 5 | 5	MAIN [1] 1.2psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

DOUBLE ICECAP

Aquaglide

Track Features

Item Number: 585226110
SKU: 0790628047869
Dimensions: L 20' x W 10.6' x H 3.1'
(L 6,1m x W 3,2m x H 1,0m)

Box Dimensions:
L 46" x W 26" x H 15", 171 lbs. 1pc.
(L 8115cm x W 66cm x H 36cm, 77,5 kg)

Sure, Double Icecap looks innocent enough, but this is one wiggly-giggly obstacle challenge! Bold users moonwalk across this double-bounce pillow, while others may prefer to balance along the perimeter. True to its' name when wet Double Icecap becomes as slippery as ice - a formidable challenge! Ideally positioned in the center of a park run, Double Icecap connects to any aquapark on two sides using our Interlock connection system.



Includes:
- Double Icecap
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Bouncing, sliding and wiggly shenanigans.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

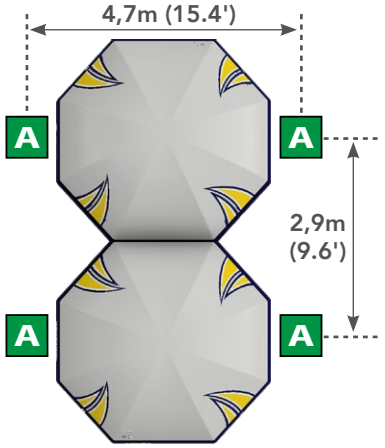

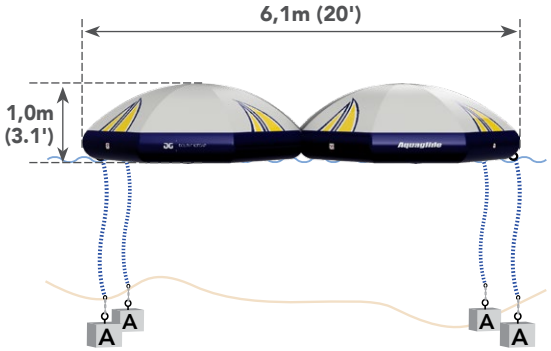

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,38 (4.5ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 2.8psi (0,193 bar) PILLOW [2] 0.12 psi (0,008 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

MONKEY DOME

Aquaglide

Track Features

Item Number: 585226129
SKU: 0790628048057
Dimensions: L 20' x W 10' x H 10.9'
(L 6,1m x W 3,1m x H 3,3m)

Box Dimensions:
L 47.2" x W 39.4" x H 27.6", 353.8 lbs. 1 pc.
(L 120cm x W 100cm x H 70cm, 160,5 kg)



The Monkey Dome is a fun feature that challenges users to swing or climb their way across without falling. However, unlike monkey bars on land, the Monkey Dome is much more forgiving because when a user falls, they land in the water. The Monkey Dome's sides also provide a way to transfer to other Aquapark features by providing two Neptune-style structures where users hold on and balance from beam to beam as they traverse the structure. With three options to cross, the Monkey Dome can be used as a standalone feature or connected to other Aquaglide Aquapark features using the D-Ring Interloc system.

Includes:
- Monkey Dome
- Storage wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, swinging, and traversing.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

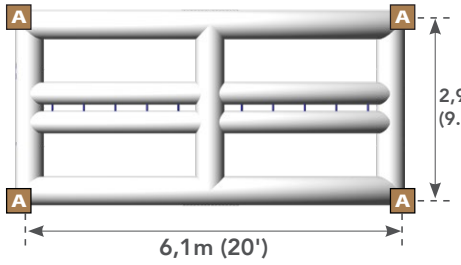

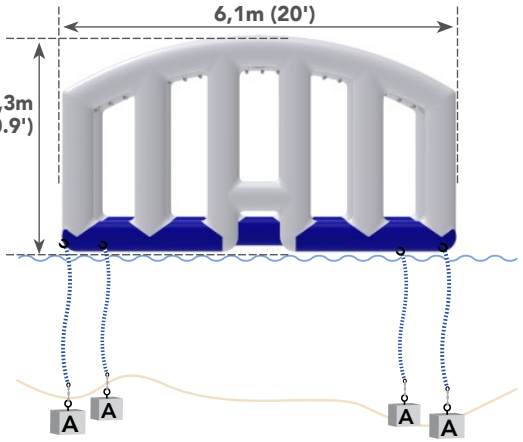

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	STRAPS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	54 kg (1200 lbs.)	1,84m (6.0ft)	4,5m (15ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	0	4	5 | 5	MAIN [1] 1.7 psi (0,117 bar) TUBE [2] 1.7 psi (0,117 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

NEPTUNE


Aquaglide

Track Features

Item Number: 585226130
SKU: 0790628048064
Dimensions: L 20' x W 8.2' x H 9.8'
(L 6,1m x W 2,5m x H 3m)

Box Dimensions:
L 39.3" x W 28.3" x H 17.3", 154 lbs. 1 pc.
(L 100cm x W 72cm x H 44cm, 70kg)

The Neptune is named after the god of water and pushes users to traverse to the feature as fast as they can. Users race themselves or other opponents to see who's fastest by using their arms to hold and balance from beam to beam. The Neptune works as a standalone feature or with any Aquaglide Aquapark configuration connected using the D-Ring Interloc system.

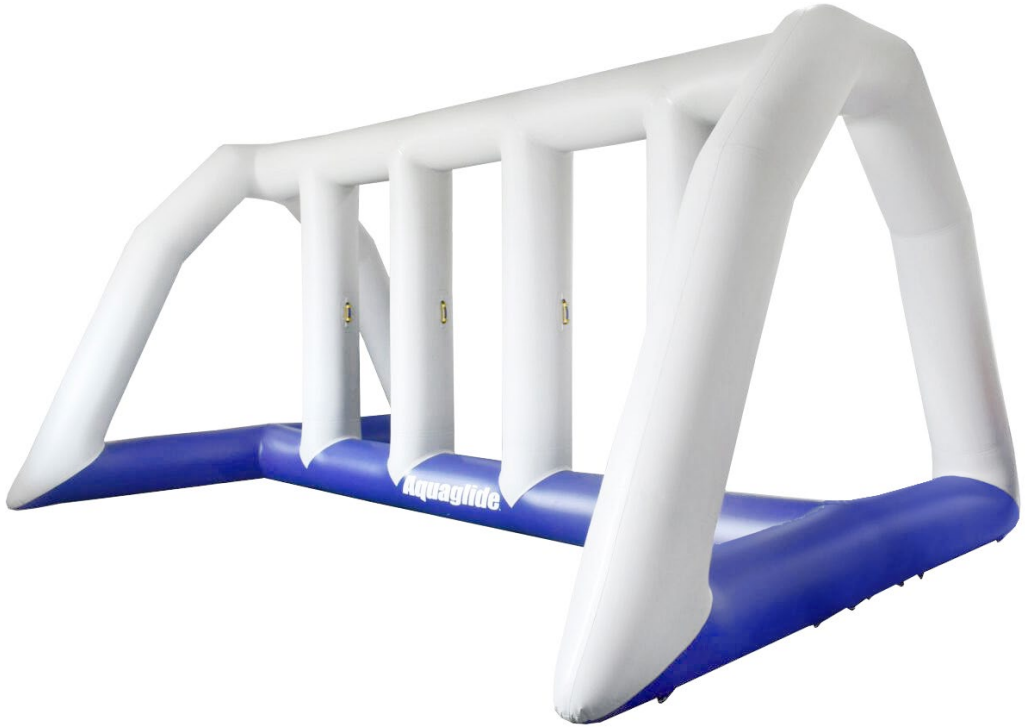

Includes:
- Neptune
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing and traversing.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

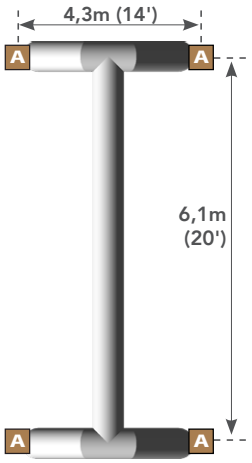

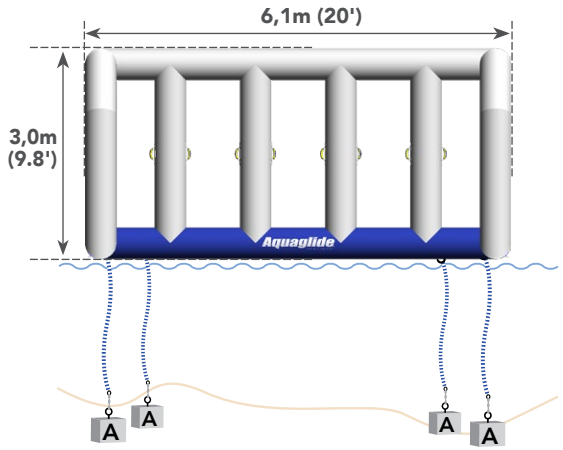

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,14m (3.7ft)	3m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2 psi (0,083 bar) UPPER [2] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

BLOCKADE 20

Aquaglide

Track Features

Item Number: 585226108
SKU: 0790628047845
Dimensions: L 20' x W 6.5' x H 5'
(L 6,1m x W 2m x H 1,5m)

Box Dimensions:
L 40" x W 32" x H 22", 74 lbs. 1 pc.
(L 100cm x W 80cm x H 55cm, 33,4 kg)



The Blockade 20 is an on-the-water obstacle course designed to test agility by challenging users to run, dip, duck, and dive their way across. Users can challenge others to a race across this 20-foot feature to see who's fastest to the other side. Connect the Blockade 20 to any Aquaglide Aquapark configuration on all four sides using the integrated D-Ring Interloc system.

Includes:
- Blockade 20
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Running, balancing, and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

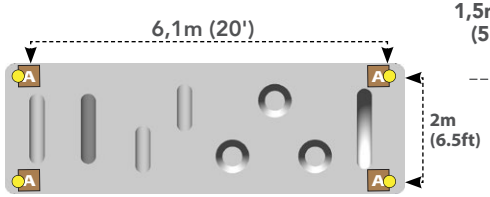

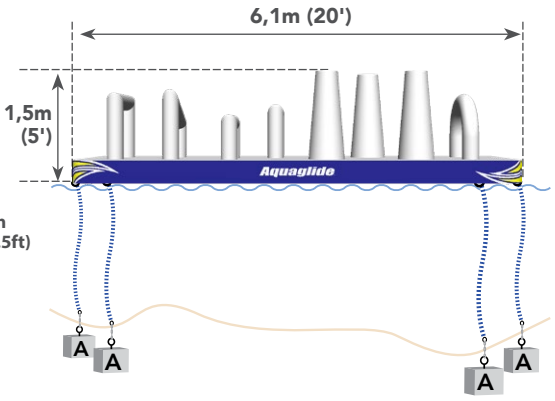

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
5 | 5	454 kg (1000 lbs.)	1,67m (5.5ft)	3m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	5 | 5 5 | 5	0	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

FIGURE 8

Aquaglide

Track Features

Item Number: 585226111
SKU: 0790628047876
Dimensions: L 20' x W 10.6' x H 1.6'
(L 6,1m x W 3,2m x H 0,5m)

Box Dimensions:
L 32" x W "24 x H 16", 97 lbs. 1 pc.
(L 80cm x W 60cm x H 40cm, 44 kg)

Figure 8 is a unique balance obstacle that presents a distinct challenge consisting of two 'S' shaped routes. The easier path is paved with mildly textured Tritex material for more positive traction, while the more challenging route is likely to test the skills of even the best among us. Interior boarding tubes and handles help users reboard easily after a splashdown. Connects to any aquapark on two ends using our Interlock connection system.



Includes:
- Figure 8
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing and transiting to other features.


3-Year Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



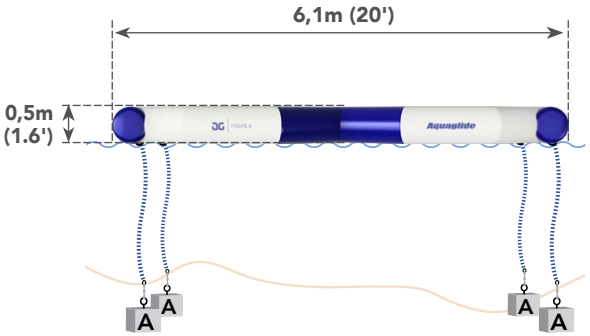

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE MAIN [1] 2.0psi (0,138 bar)
4 | 4	363 kg (800 lbs.)	1,14m (3.7ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	

© Copyright 2025 Aquaglide | Proprietary + Confidential

I-BEAM

Aquaglide

Track Features

Item Number: 585226119
SKU: 0790628047951
Dimensions: L 20' x W 6.5' x H 3.5'
(L 6,1m x W 2m x H 1,1m)

Box Dimensions:
L 30" x W 22" x H 14", 1 pc.
(L 75cm x W 55cm x H 35cm, 42,6 kg)

Designed as an approachable feature open to all skill levels, the I-Beam tests balance, strength, and concentration. Whether users race to the other side, hold jousting matches or see who can stay on the longest, the I-Beam offers the fun of a balance beam in a more forgiving setting. Connect the I-Beam to any Aquaglide Aquapark configuration on two sides using the integrated D-Ring Interloc system.



Includes:
- I-Beam
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing.


Warranty:
Limited 3-year Warranty

Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

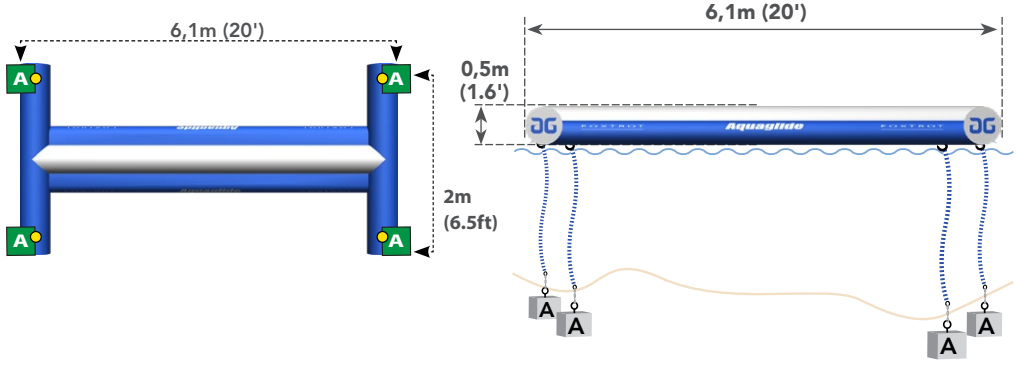

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,16m (3.8ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	5 | 5	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

I-HOP

Aquaglide

Track Features

Item Number: 585220101
SKU: 0790628047968
Dimensions: L 20' x W 10' x H 3.25'
(L 6,1m x W 3,1m x H 1,0m)

Box Dimensions:
L 40" x W 30" x H 18", 150.1 lbs., 1 pc.
(L 100cm x W 75cm x H 45cm)



Created to challenge users to hop, jump, or crawl across, the I-Hop is a balance testing feature that challenges even the most skilled park visitors. Featuring non-slip surfaces on all jump surfaces, the I-Hop creates an American Ninja Warrior-like structure that's a popular feature with a broad spectrum of users. Connect the I-Hop to any Aquaglide Aquapark configuration on two sides using the integrated D-Ring Interloc system.

Includes:
- I-Hop
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing, jumping, and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

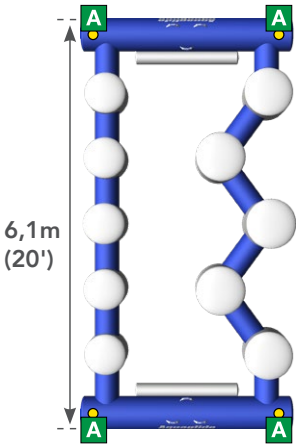

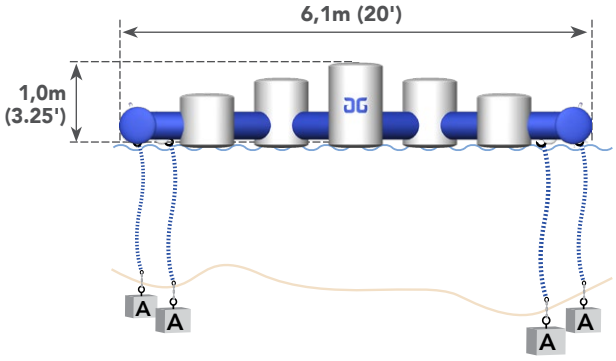

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,41m (4.6ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2 psi (0,083 bar), BOARDING TUBES [2] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

ARETE 20

Aquaglide

Track Features

Item Number: 585226104
SKU: 0790628047807
Dimensions: L 20' x W 8.1' x H 6'
(L 6,09m x W 2,46m x H 1,83m)

Box Dimensions:
L 47" x W 32" x H 25", 298.7 lbs.
(L 117 x W 81 x H 62cm, 124,7 kg)

The all new Arete 20 provides an extended, lateral-climbing obstacle as users transit challenging ledges on each side. Adds diversity to any aquapark in the large track footprint, while providing two needed bridges for ingress/ egress of enclosed aquapark rings. Use the Arete 20 as a standalone feature or connect it to other Aquaglide Aquapark features using the D-Ring Interloc system.



Includes:
- Arete 20
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, playing, jumping, ingress/ egress for enclosed aquapark rings.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

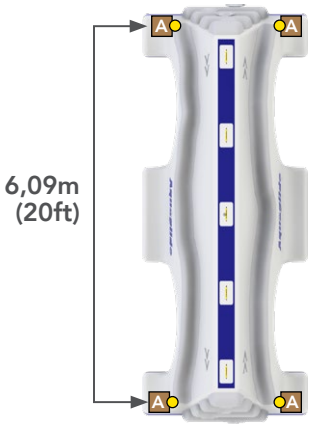

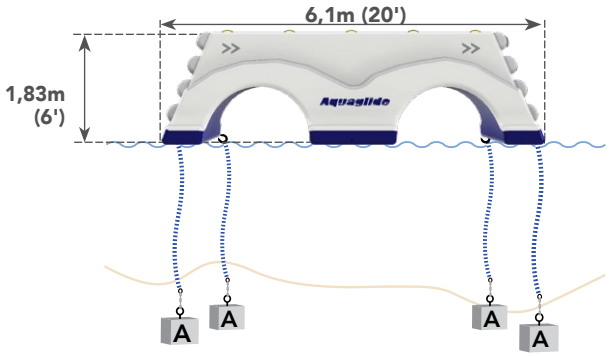

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
5 | 5	454 kg (1000 lbs.)	1,82m (6.0ft)	3,0m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5	Main [1] 1.2psi (0,083bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

PARKWAY 20

Aquaglide

Track Features

Item Number: 585226135
SKU: 0790628048118
Dimensions: L 20' x W 6.5' x H 3.5'
(L 6,1m x W 2m x H 1,1m)

Box Dimensions:
L 2.5' x W 1.8' x H 1.3', 150 lbs.
(L 75cm x W 55cm x H 40cm, 68 kg)



The Parkway 20 provides a fun and challenging undulating surface for users to attempt to run, walk, or slide across on their stomachs. Like a bicycle pump track design, the Parkway 20 makes transferring to other aquapark features an exciting and slippery challenge. Connect the Parkway 20 to any Aquaglide Aquapark configuration on all four sides using the integrated D-Ring Interloc system. The Parkway is available in three sizes, the Parkway 30, the Parkway 20, and the Parkway 10.

Includes:
- Parkway 20
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

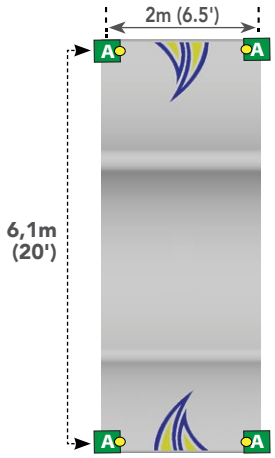

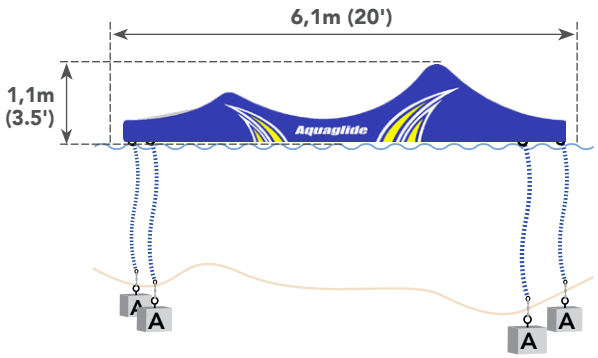

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	1,44m (4.7ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	5 | 5 5 | 5	0	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

FOXTROT

Aquaglide

Track Features

Item Number: 585226112
SKU: 0790628047883
Dimensions: L 20' x W 6.5' x H 1.5'
(L 6,1m x W 2m x H 0,5m)

Box Dimensions:
L 30" x W 22" x H 14", 57 lbs. 1pc.
(L 76cm x W 56cm x H 36cm, 26 kg)



The Foxtrot brings classic balance beam action to the water - whether it's a friendly joust, a timed sprint across, or a personal test of focus and endurance. Designed to be approachable for all ages and skill levels, it challenges balance, strength, and concentration in a fun, low-risk setting. Connects on two sides using the D-Ring Interloc system, making it a perfect addition to any aquapark layout—especially where movement, laughter, and a little friendly rivalry are the goal.

Includes:
- Foxtrot
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

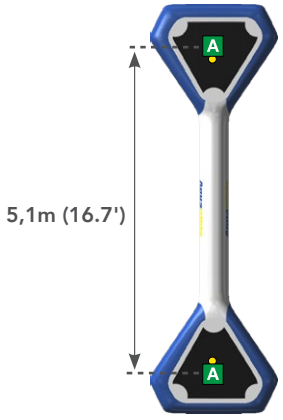

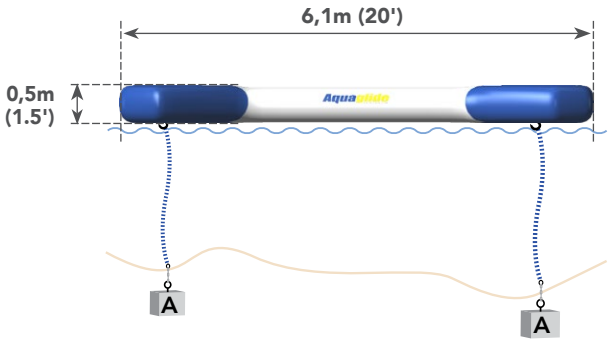

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,14m (3.7ft)	3m (10ft)	200 kg (500 lbs.)	100 kg (250 lbs.)	2	2	5 | 5	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

WALK ON WATER


Aquaglide

Track Features

Item Number: 585225137
SKU: 0790628047630
Dimensions: L 20' x W 5' x H 0.3'
(L 6m x W 1,5m x H 0,1m)

Box Dimensions:
L 65" x W 15.7" x H 12.6", 104 lbs.
(L 165cm x W 40cm x H 32cm, 47 kg)

The Walk on Water is designed for higher traffic Aquaparks and those installed in extreme climates or closer to the Equator. Featuring our class-leading 10 cm Double-layer drop-stitch construction, the Walk on Water is an exciting alternative to the Speedway 20. It is a fun and challenging way to connect Aquapark features. Use as a standalone item or connect to any Aquaglide Aquapark using the integrated D-ring Interloc System.

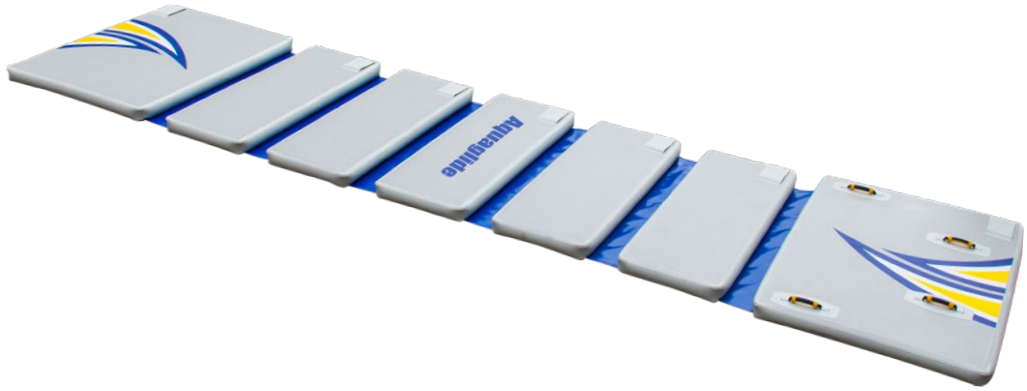

Includes:
Walk on Water
10 Vario Lock straps
Repair kit

Not Included:
Anchor weights
Mooring lines
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Complete Mooring Line, 19 ft (5,79m)

Best For:
A challenging transfer to other features.

Warranty:
3-year limited against any manufacturing defects.

Material:
10cm welded dropstitch

Construction:
Welded dropstitch

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	STRAPS	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	0,98m (3.2ft)	3m (10ft)	N/A	N/A	10 Vario-Lock	5 | 5	MAIN [1-7] 5 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

RIDGEWAY 10

Aquaglide

Track Features

Item Number: 585225144
SKU: 0790628047708
Dimensions: L 10' x W 8' x H 4.9'
(L 3,05m x W 2,44m x H 1,50m)

Box Dimensions:
L 45.3" x W 29.5" x H 15.7", 174.2lbs.
(L 115cm x W 75cm x H 40cm, 79,0kg)

Ridgeway 10 is a track obstacle that brings its own style of climbing, jumping and balance to the 10-foot track footprint. A quick scramble up and over will get the job done, but once on top, the whimsical stump jumping platforms beg to be bounced, making this one of the most 'session-able' 10-foot features in the range. Used to promote continuous play as part of an aquapark track run.



Includes:
- Ridgeway 10
- Storage Wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines

Recommended Items:
- Hurricane 110v 3.6 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)
- Boarding platform
- Inflation pump

Best For:
Climbing, bouncing, jumping.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam with Welded 3-Layer Seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

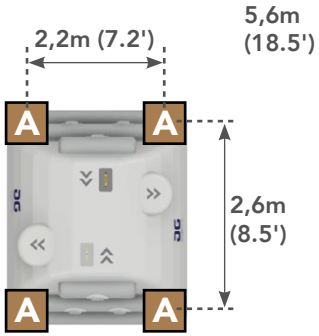

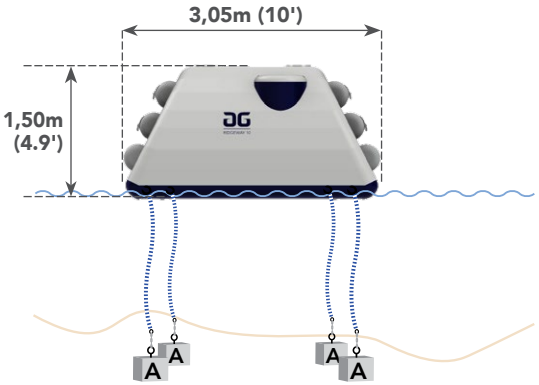

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,65 (5.4ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential


ROCK HOPPER 10

Aquaglide

Track Features

Item Number: 585227107
SKU: 0790628048651
Dimensions: L 10’ x W 6.5’ x H 3.9’
(L 3,05m x W 1,98m x H 1,20m)

Box Dimensions:
L 45.3" x W 29.5" x H 9.8", 120lbs.
(L 115cm x W 75cm x H 25cm, 54,4kg)

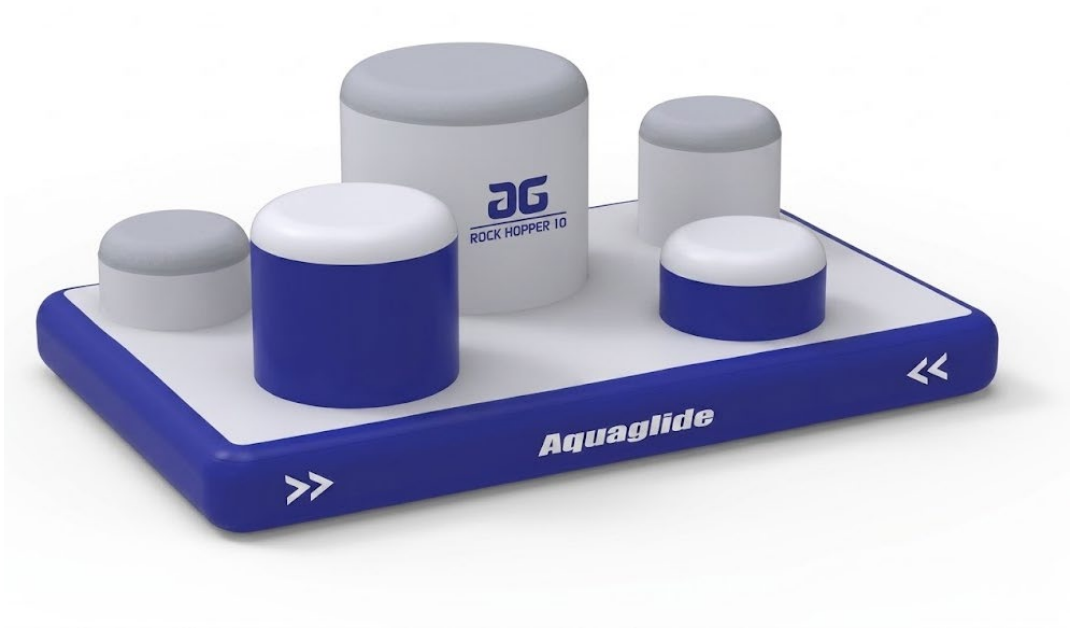

With its collection of varied-height platforms, the Rock Hopper 10 turns a simple crossing into a playful test of balance and movement. Participants can hop from platform to platform, weave between obstacles, or use the different heights to create their own route across the feature. The open layout encourages exploration and keeps the experience active, whether moving quickly through the course or stopping to leap from platform to platform. Connects to any aquapark using Aquaglide’s Interlock system and is designed to be positioned in the middle of a track, adding variety and excitement to the route.

Includes:
- Rock Hopper 10
- Storage Wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines

Recommended Items:
- Hurricane 110v 3.6 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)
- Boarding platform
- Inflation pump

Best For:
Climbing, hopping, jumping.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam with Welded 3-Layer Seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

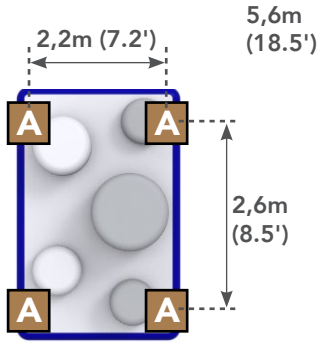

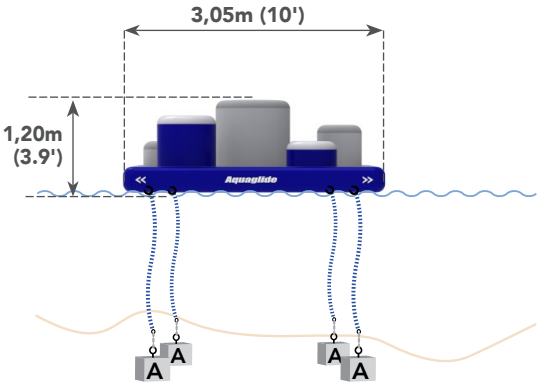

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,5 m (4.9ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 5 | 5	MAIN [1] 1.2psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SPRINGWAY 10

Aquaglide

Track Features

Item Number: 585227109
SKU: 0790628048675
Dimensions: L 10.0' x W 8.6' x H 5.2'
(L 3,05m x W 2,62m x H 1,58m)

Box Dimensions:
L 45.3" x W 29.5" x H 9.8", 113.1lbs.
(L 115cm x W 75cm x H 25cm, 51,3kg)



The Springway 10 turns momentum into adrenaline with a jump that demands total commitment. Featuring a gap wide enough to make even confident users pause at the edge, it tests timing and courage as participants leap to clear the open water between platforms. The inviting arch design dares challengers to fly across, delivering pure excitement with every landing. Integrated seamlessly into any track run using Aquaglide's Interlock system, the Springway Series brings three options to any aquapark configuration.

Includes:
- Springway 10
- Storage Wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines

Recommended Items:
- Hurricane 110v 3.6 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)
- Boarding platform
- Inflation pump

Best For:
Running, leaping, ingress/egress for enclosed aquapark rings.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam with Welded 3-Layer Seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

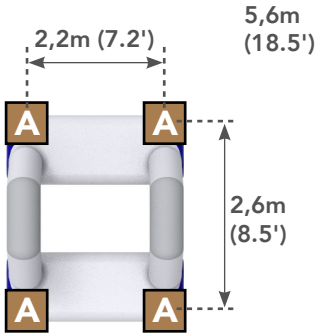

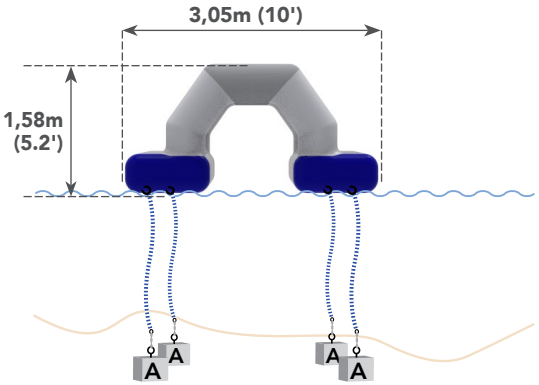

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,69 (5.5ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

HATCHWAY 10

Aquaglide

Track Features

Item Number: 585225141
SKU: 0790628047678
Dimensions: L 10' x W 6.5' x H 5.3'
(L 3,05m x W 1,98m x H 1,60m)

Box Dimensions:
L 34.3" x W 29.5" x H 9.8", 105.8 lbs.
(L 87cm x W 75cm x H 25cm, 48,0kg)

Multiple pathways through, over or around this obstacle make Hatchway a unique and interesting challenge. While more thoughtful users may choose to tiptoe around the outside, the quick and nimble are more likely to slide through or hurdle over the hatchway wall. Either way, Hatchway 10 promotes continuous play as part of an aquapark track run, connecting to other Aquaglide features on 4 sides using the Interlock D-Ring system.



Includes:
- Hatchway 10
- Storage Wrap
- Repair kit

Not Included:
- Anchor weights
- Mooring lines

Recommended Items:
- Hurricane 110v 3.6 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)
- Boarding platform
- Inflation pump

Best For:
Sliding obstacle.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam with Welded 3-Layer Seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



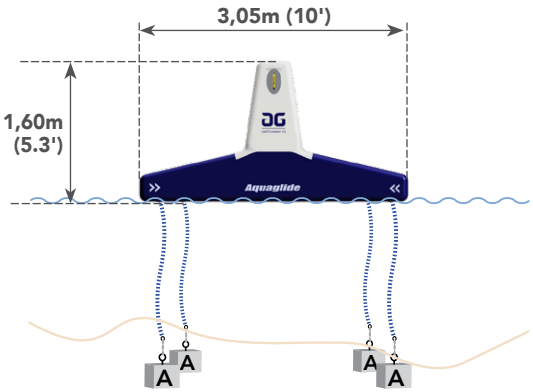

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,70 (5.6ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 | 5 | 5	MAIN [1] 1.2psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

ARETE 10

Aquaglide

Track Features

Item Number: 585226101
SKU: 0790628047777
Dimensions: L 10' x W 8.1' x H 6'
(L 3,05m x W 2,46m x H 1,83m)

Box Dimensions:
L 42" x W 29" x H 18", 135.8 lbs.
(L 105cm x W 72cm x H 45cm, 61,6 kg)

The all new Arete 10 provides a unique lateral-climbing obstacle as users transit challenging ledges on each side. Adds diversity to any aquapark in the small track footprint, while providing a needed bridge for ingress/ egress of enclosed aquapark rings. Use the Arete 10 as a standalone feature or connect it to other Aquaglide Aquapark features using the D-Ring Interloc system.



Includes:
- Arete 10
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, playing, jumping, ingress/ egress for enclosed aquapark rings.

Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



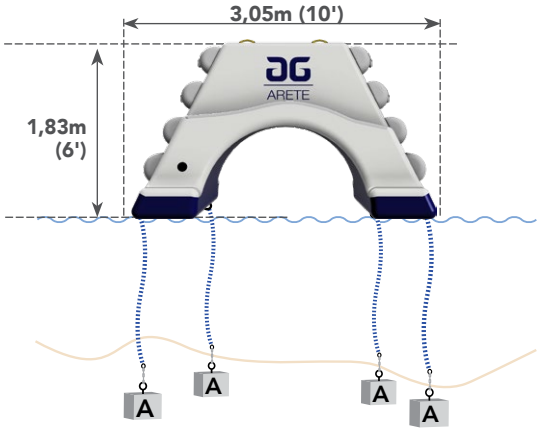

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
3 | 3	272 kg (600 lbs.)	1,82m (6.0ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	Main [1] 1.2psi (0,083bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

VISTA 10


Aquaglide

Track Features

Item Number: 585226169
SKU: 0790628048453
Dimensions: L 10' x W 6.5' x H 5'
(L 3m x W 2m x H 1,5m)

Box Dimensions:
L 34" x W 30" x H 14", 108 lbs. 1pc.
(L 87cm x W 75cm x H 36cm, 49 kg)

The Vista 10 provides countless ways to traverse this challenging structure: climb over the high roads or explore the inner passages, or for those who choose to linger, an interior splash zone with mesh floors provides a cool place for up to four users to rest, relax, or play. The Vista 10 connects to other Aquaglide Aquapark features using the secure D-Ring Interloc system.

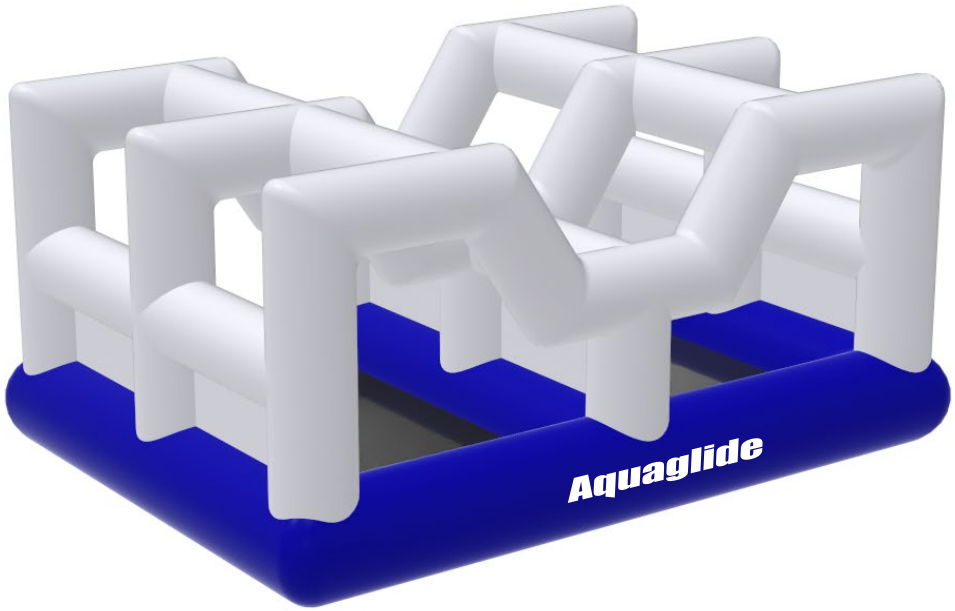

Includes:
- Vista 10
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

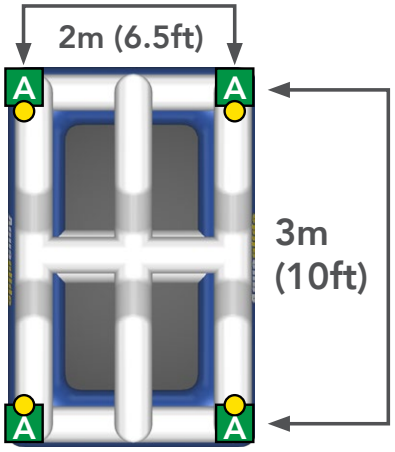

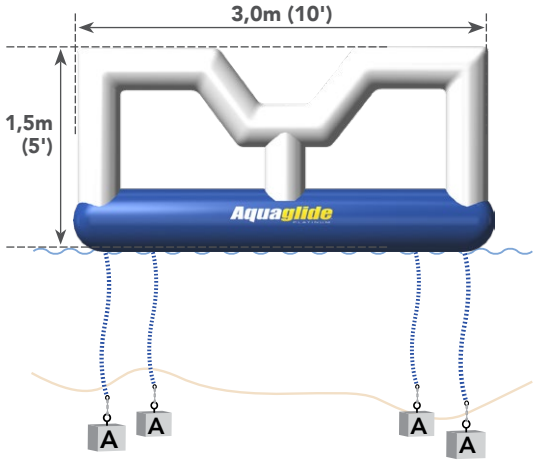

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,64m (5.4ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	5 | 5 5 | 5	LOWER [1] 2.0 psi (0,138 bar) UPPER [2] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SUBWAY 10

Aquaglide

Track Features

Item Number: 585226151
SKU: 0790628048279
Dimensions: L 10' x W 8' x H 5'
(L 3m x W 2,5m x H 1,5m)

Box Dimensions:
L 36" x W 23" x H 17", 169 lbs. 1pc.
(L 90cm x W 57cm x H 42cm, 76,3 kg)

The Subway 10 features multiple paths when transferring to other Aquapark features, including an arched climbing wall above a covered tunnel. Designed to integrate into any Aquaglide Aquapark Series using the secure D-Ring Interloc system, the Subway 10 is quite possibly the most fun users will ever have on the Subway.



Includes:
- Subway 10
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

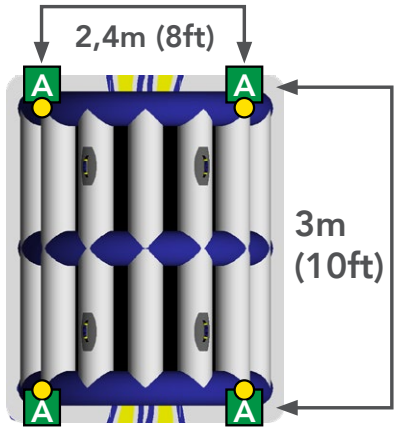

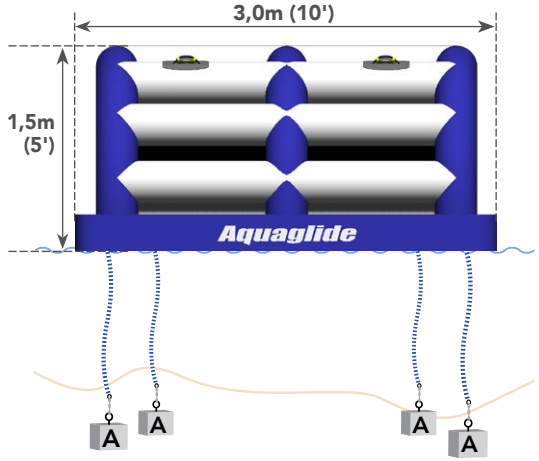

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,67m (5.5ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	5 | 5 | 5 | 5	0	MAIN [1] 1.5 psi (0,103 bar) TUBE [2] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SIERRA 10

Aquaglide

Track Features

Item Number: 585226144
SKU: 0790628048200
Dimensions: L 10' x W 8.7' x H 3.8'
(L 3m x W 2,6m x H 1,17m)

Box Dimensions:
L 34" x W 30" x H 10", 84 lbs. 1pc.
(L 86cm x W 76cm x H 25cm, 38 kg)



The Sierra 10 feature presents an exciting challenge that allows users to climb, balance, slide, or jump from the exterior structure, or play and rest on the two interior mesh floor splash zones. For those who choose to hang out in the interior splash zones, mesh floors provide a cool place for up to four users to rest, relax, or play. Connect the Sierra 10 to other Aquaglide Aquapark features using the integrated secure D-Ring Interloc system.

Includes:
- Sierra 10
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, balancing, jumping, sliding, and resting.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

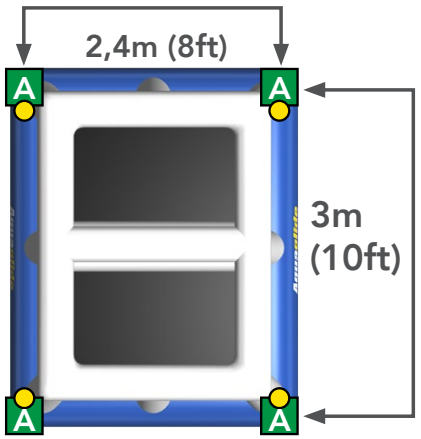

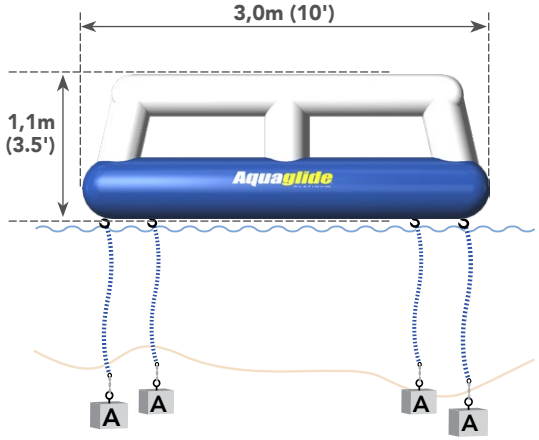

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,48m (4.8ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	5 | 5 5 | 5	LOWER [1] 2.0 psi (0,138 bar) UPPER [2] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

BARRICADE 10

Aquaglide

Track Features

Item Number: 585226105
SKU: 0790628047814
Dimensions: L 10' x W 6.5' x H 5'
(L 3m x W 2m x H 1,5m)

Box Dimensions:
L 30" x W 22" x H 16", 105 lbs. 1 pc.
(L 75cm x W 55cm x H 40cm, 47,6 kg)



The Barricade 10 has a smaller footprint than its larger sibling, Blockade 20, yet still packs plenty of challenges and fun into an on-the-water obstacle course designed to test agility. Users can challenge one another to run, dip, duck, and dive their way across to see who's fastest to the other side. Connect the Barricade 10 to any Aquaglide Aquapark configuration on all four sides using the integrated D-Ring Interloc system.

Includes:
- Barricade 10
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Running, balancing, and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

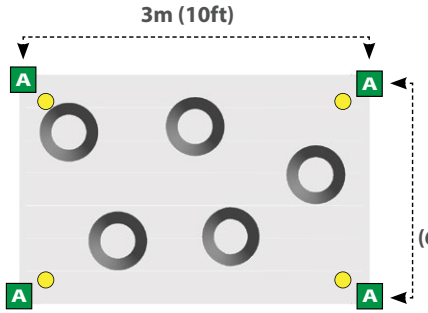

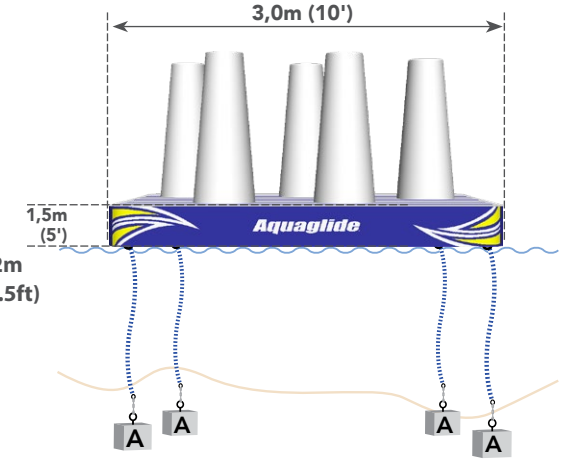

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,67m (5.5ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	5 | 5 5 | 5	0	MAIN [1] 1.5 psi (0,103 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

OVERPASS 10

Aquaglide

Track Features

Item Number: 585226133
SKU: 0790628048095
Dimensions: L10' x W 7.4' x H 5.5'
(L 3m x W 2,25m x H 1,67m)

Box Dimensions:
L 30" x W 22" x H 14", 75 lbs. 1 pc.
(L 75cm x W 55cm x H 35cm, 33,4 kg)

Ideal for challenge tracks in a pool or open water, the Overpass 10 offers a fun climbing challenge with an optional balancing route for less daring users. The Overpass 10's arched climbing wall challenges users to take the high route across and includes integrated mesh crow's nest seats for a comfortable place to rest en route. The Overpass 10 integrates into any Aquaglide Aquapark Series using the secure D-Ring Interloc system.



Includes:
- Overpass 10
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, balancing, and transferring to other features.


Warranty:
Limited 3-year Warranty

Material:
0.90 mm / 31 oz Cx3


Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

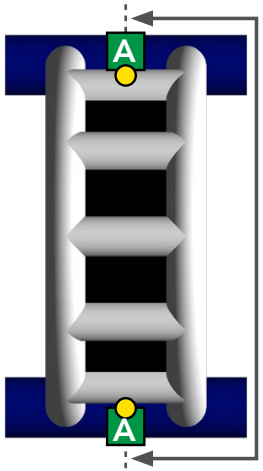

3m
(10ft)

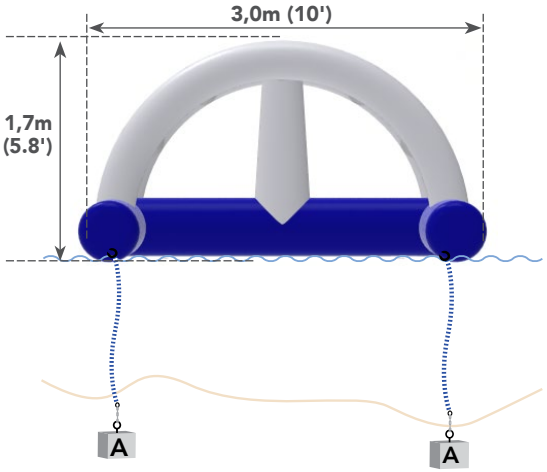

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,74m (5.7ft)	3m (10ft)	500 kg (1000 lbs.)	250 kg (500 lbs.)	2	2	5 | 5	0	MAIN [1] 2.0 psi (0,137 bar) TUBE [2] 2.6 psi (0,179 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

PARKWAY 10

Aquaglide

Track Features

Item Number: 585226134
SKU: 0790628048101
Dimensions: L 10' x W 6.5' x H 2.4'
(L 3m x W 2m x H 0,7m)

Box Dimensions:
L 30" x W 22" x H 12", 81 lbs. 1 pc.
(L 75cm x W 55cm x H 30cm, 36,5 kg)



The Parkway 10 provides a fun and challenging surface for users to run, walk or slide across on their stomachs. Modeled after a bicycle pump track, the Parkway 10 makes transferring to other aquapark features an exciting and slippery challenge. Connect the Parkway 10 to any Aquaglide Aquapark configuration on all four sides using the integrated D-Ring Interloc system. The Parkway is available in three sizes, the Parkway 30, the Parkway 20, and the Parkway 10.

Includes:
- Parkway 10
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding and transferring to other features.


Warranty:
Limited 3-year Warranty

Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

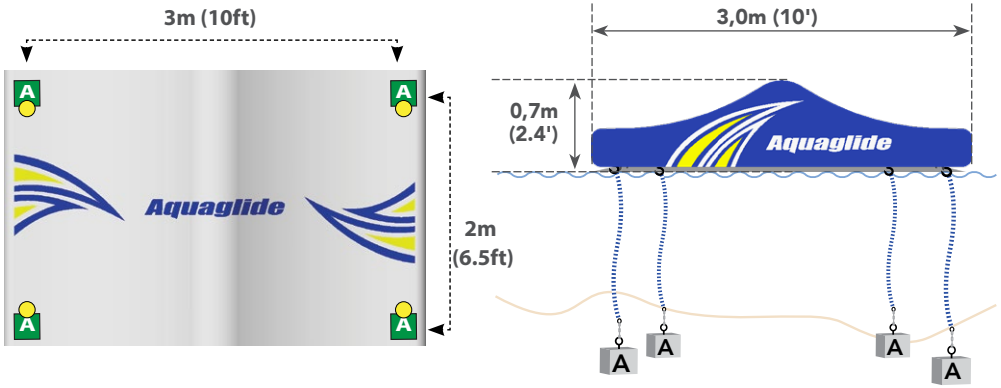

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,27m (4.2ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	5 | 5 5 | 5	0	MAIN [1] 1.5 psi (0,103 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

DELTA 10

Aquaglide

Track Features

Item Number: 585226183
SKU: 0 7 90628 04880 4
Dimensions: L 10' x W 6.75' x H 1.5'
(L 3,1m x W 2,1m x H 0,5m)

Box Dimensions:
L 30" x W 22" x H 10", 53 lbs. 1pc.
(L 76cm x W 56cm x H 25cm, 24 kg)

The Delta 10 features a horizontal ladder-style balancing challenge that includes two interior splash zones that serve as a natural gathering place in hot weather. Connect the Sierra 10 to other Aquaglide Aquapark features using the integrated secure D-Ring Interloc system.



Includes:
- Delta 10
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing, jumping, gathering, and resting.


3-Year Warranty:
Limited 3-year Warranty

Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

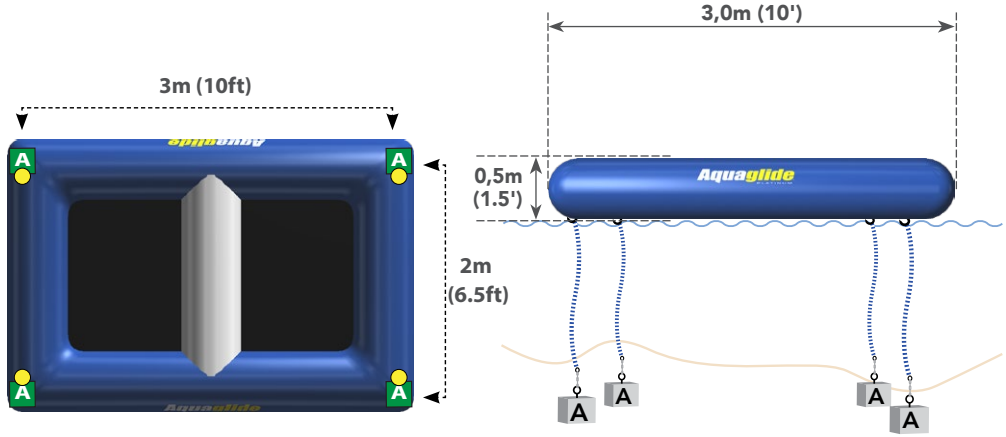

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,13m (3.7ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 5 | 5	MAIN [1] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

QUARTERBACK

Aquaglide

Track Corners

Item Number: 585226138
SKU: 0790628048149
Dimensions: L 15.2' x W 9' x H 4.7'
(L 4,6m x W 2,7m x H 1,4m)

Box Dimensions:
L 46" x W 37" x H 18", 187.4 lbs.
L 113cm x W 93cm X H 44cm, 85kg)

The Quarterback Corner adds diversity and play value to Ring Series Aquaparks. With two novice climbing walls, one mini-drop, and a dedicated jump/blast zone, the Quarterback is a user-favorite destination that accommodates five users. This feature perfectly fits the Aquaglide Ring Series layouts' corners and connects on three sides using Vario straps.



Includes:
- Quarterback
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding, climbing, jumping and transferring to other features.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

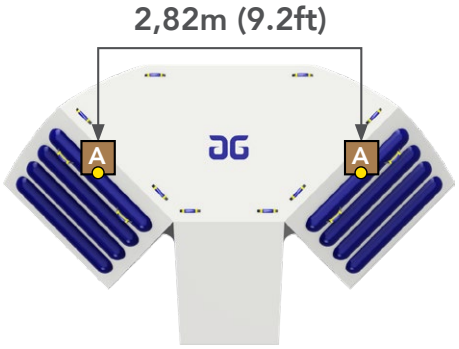

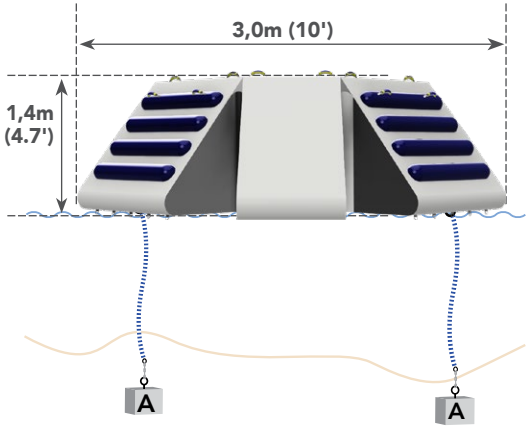

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
5 | 5	454 kg (1000 lbs.)	1,62m (5.3ft)	3,0m (10ft)	500 kg (1000 lbs.)	250 kg (500 lbs.)	2	2	2	5 | 5 | 5	Main [1] 0.8psi (0,055bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

LUGEBACK

Aquaglide

Track Corners

Item Number: 585226128
SKU: 0790628048040
Dimensions: L 15.2' x W 7.1' x H 4.1'
(L 4,6m x W 2,2m x H 1,3m)

Box Dimensions:
L 36" x W 32" x H 15", 141.1 lbs.
(L 90cm x W 80cm X H 38cm, 64 kg)



The Lugeback is a warped luge corner with a cliffhanger ledge for walking on the backside that adds challenge and diversity to any Ring Series Aquapark layout. Users can slip and slide around the inside corner with a bit of speed or choose a more deliberate path along the backside cliffhanger section. The Lugeback is designed as a corner feature for Aquaglide Ring Series Aquaparks and connects on three sides using Vario straps.

Includes:
- Lugeback
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding, climbing, and transferring to other features.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

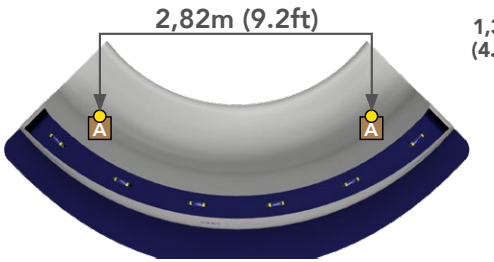

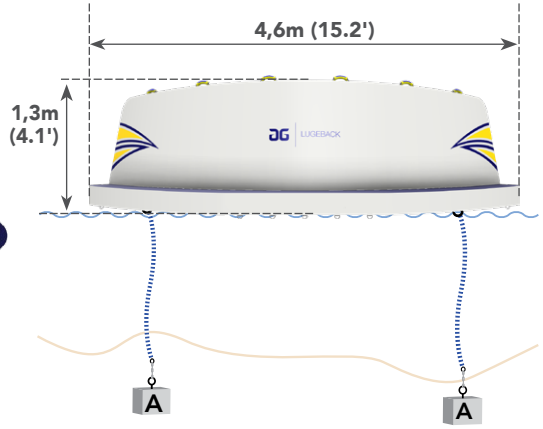

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,48m 4.8ft)	3,0m (10ft)	500 kg (1000 lbs.)	250 kg (500 lbs.)	2	2	2	5 | 5 | 5	Main [1] 1.5psi (0,103bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

PATHBACK

Aquaglide

Track Corners

Item Number: 585225138
SKU: 0790628047647
Dimensions: L 12.7' x W 12.4' x H 1.6'
(L 3,87m x W 3,78m x H 0,48m)

Box Dimensions:
L 12.6" x W 9.8" x H 38", 165 lbs.
(L 32cm x W 25cm X H 65cm, 83.8 kg)



The Pathback is a dynamic balance feature that challenges users to navigate across a series of rounded stepping platforms and balance bars. Users can choose their own path across the feature, testing their balance, coordination, and agility as they move from platform to platform. The Pathback is designed as a connecting feature for Aquaglide Ring Series Aquaparks and connects on two sides using Vario straps.

Includes:
- Pathback
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balance and coordination, transferring to other features.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Tubular / Dropstitch

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

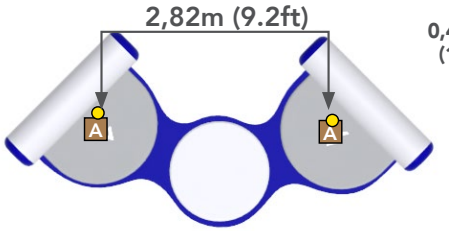

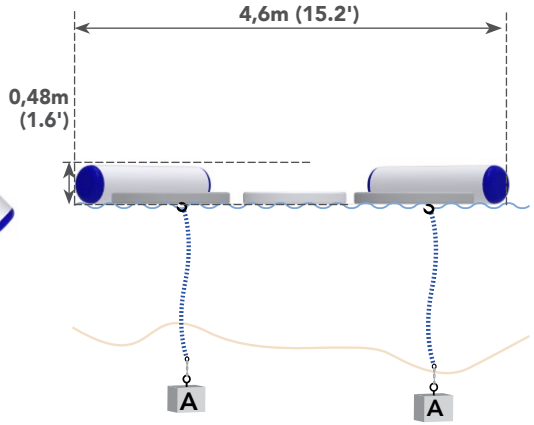

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
3 | 3	272 kg (600 lbs.)	1,14m (3.7ft)	3,0m (10ft)	300 kg (750 lbs.)	100 kg (250 lbs.)	3	3	3	5 | 5	Tubes [1] 2.0psi (0,138bar) Steps [2] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

BENDBACK

Aquaglide

Track Corners

Item Number: 585226106
SKU: 0790628047821
Dimensions: L 15' x W 7' x H 1.2'
(L 4,6m x W 2,2m x 0,4m)

Box Dimensions:
L 30" x W 22" x H 12", 81 lbs. 1 pc.
(L 75cm x W 55cm X H 30cm, 36,6 kg)

Perfectly angled for maximum G-forces, the Bendback is a bermed corner designed to work with any Aquaglide Aquapark Series or Pool Challenge Track configuration. Users can make a run for it by hitting this angled corner at speed when transferring to other features. The Bendback connects to any Aquapark configuration using the integrated D-ring Interloc System on both ends.



Includes:
- Bendback
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Running, hopping, and transferring to other features.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

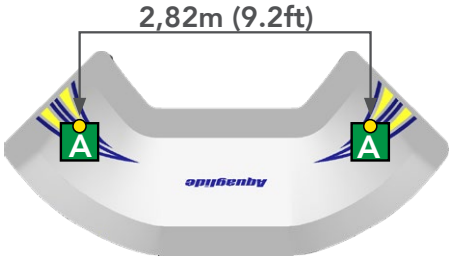

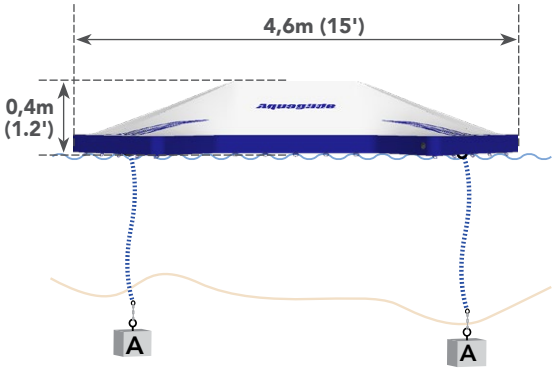

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,11m (3.6ft)	3m (10ft)	200 kg (500 lbs.)	100 kg (250 lbs.)	2	2	5 | 5 5 | 5	0	MAIN [1] 1.8 psi (0,124 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

KICKBACK

Aquaglide

Track Corners

Item Number: 585226123
SKU: 0790628047999
Dimensions: L 15' x W 7' x H 1.6'
(L 4,6m x 2,2m x 0,5m)

Box Dimensions:
L 30" x W 22" x H 10", 64 lbs. 1 pc.
(L 75cm x W 55cm X H 25cm, 28,8 kg)



The Kickback is a ladder-bridge corner that brings a unique challenge to any Ring or Circuit layout. While nicely bermed for cornering at speed, the Kickback requires extra care and strategy to navigate successfully. The Kickback connects on both ends to Ring or Circuit Series layouts using the integrated D-Ring Interloc system combined with our secure Vario-Lock cinch strap system.

Includes:
- Kickback
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Running, hopping, and transferring to other features.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

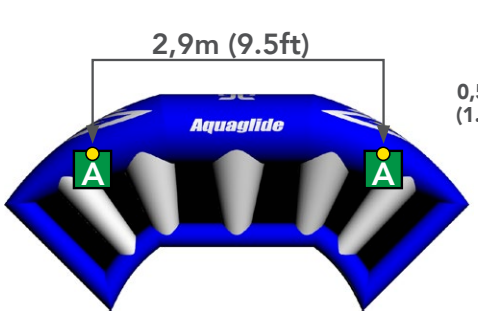

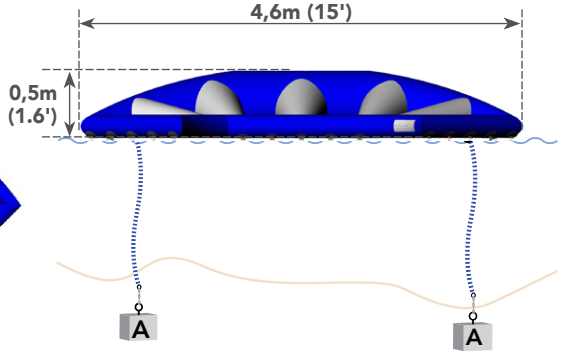

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,15m (3.8ft)	3m (10ft)	200 kg (500 lbs.)	100 kg (250 lbs.)	2	2	5 | 5 5 | 5	0	MAIN [1] 2.2 psi (0,152 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

WALKBACK

Aquaglide

Track Corners
SPECIAL ORDER

Item Number: 585226214
SKU: 0790628049733
Dimensions: L 15' x W 7' x H 0.3'
(L 4,6m x 2,1m x 0,1m)

Box Dimensions:
L 67" x W 14" x H 12", 75 lbs. 1 pc.
(L 170cm x W 35cm X H 30cm, 34 kg)

A perfect corner for any Aquaglide challenge track or Ring Series layout, the Walkback adds a degree of difficulty to any pathway by incorporating fanned out steps into a single 90-degree turn. The Walkback connects to any Ring Series aquapark using the D-ring Interloc System on both ends.



Includes:
- Walkback
- 10 Vario Lock straps
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Running, hopping, and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

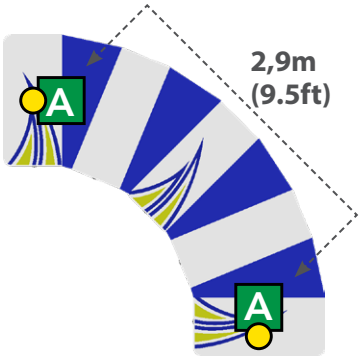

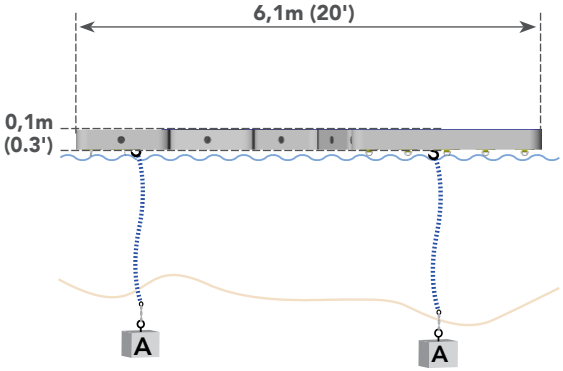

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
2 | 2	272 kg (600 lbs.)	1,21m (4ft)	3m (10ft)	200 kg (500 lbs.)	100 kg (250 lbs.)	2	2	5 | 5	10 Vario-Lock	[1-7] 10 psi (0,689 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

UNIVERSAL ARCHWAY

Aquaglide

Junction

Item Number: 585226160
SKU: 0790628048361
Dimensions: L 12.6' x W 12.6' x H 8.2'
(L 3,9m x W 3,9m x H 2,5m)

Box Dimensions:
L 45" x W 41" x H 24", 280 lbs.
(L 113cm x W 103cm X H 59cm, 127 kg)

Whether it's the high or low road, the Universal Archway is where paths diverge. Featuring an intermediate climbing arch above and a tunnel below, this feature adds excitement, diversity, and play value for up to six users at once. Designed to fit any Aquaglide Aquapark Series, the Universal Archway can be connected to other park features on all eight sides.



Includes:
- Universal Archway
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing and transferring to other features.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

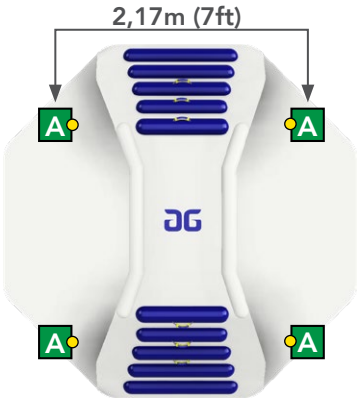

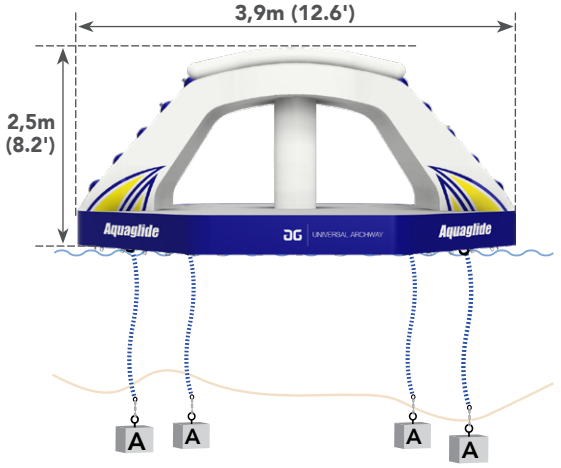

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	1,79m (5.9ft)	3,0m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5 | 5 | 5 5 | 5 | 5 | 5	Main [1] 1.5psi (0,103bar), Arch [2] 1.2psi (0,083bar), Rails [3] 3.5psi (0,241bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

UNIVERSAL LIFEGUARD STATION


Aquaglide

Junction

Item Number: 585226163
SKU: 0790628048392
Dimensions: L 12.5' x W 12.5' x H 14.9'
(L 3,85m x W 3,85m x H 4,5m)

Box Dimensions:
L 44" x W 32" x H 22", 271.2 lbs.
(L 110cm x W 80cm x H 55cm, 123kg)

The Universal Lifeguard Station features an elevated platform that provides lifeguards a 360 degree view, a fully covered top for a reprieve from the sun, and under platform storage for essential lifeguard supplies. The Universal Lifeguard Station helps lifeguards keep an eye on aquapark users from a designated perch. Connects to any Aquaglide Aquapark Series configuration using the integrated D-ring Interloc System and secure Vario-Lock cinch straps.

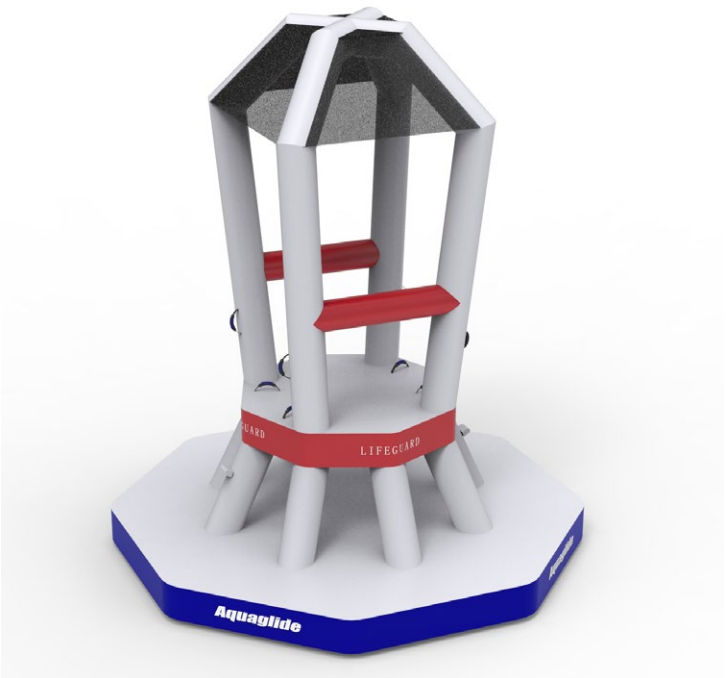

Includes:
- Universal Lifeguard Station
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Lifeguards.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

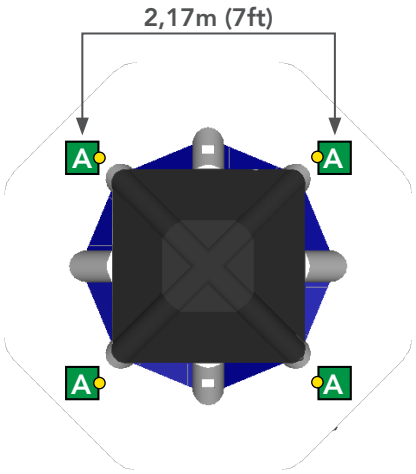

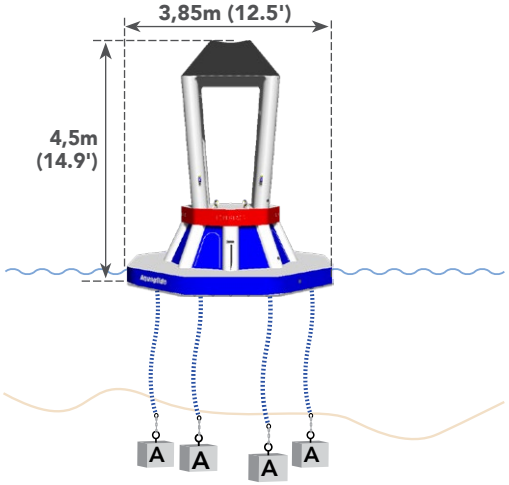

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	1,59m (5.2ft)	3m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5 | 5 | 5 5 | 5 | 5 | 5	MAIN [1] 2.0 psi (0,138 bar), LOWER [2] 2.0 psi (0,138 bar), UPPER [3] 2.2psi (0,152bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

UNIVERSAL THUNDERDOME

Aquaglide

Junction

Item Number: 585226166
SKU: 0790628048422
Dimensions: L 12.5' x W 12.5' x H 4.9'
(L 3,8m x W 3,8m x H 1,5m)

Box Dimensions:
L 35.4" x W 27.5" x 15.7", 135 lbs. 1pc.
(L 90cm x W 70cm H 40cm, 61,3kg)

The Universal Thunderdome is an octagon-shaped structure that's a smaller version of the popular Thunderdome. Offering multiple angles and unlimited Aquapark configuration possibilities, the Universal Thunderdome can be used as a hub, a corner, or anything in between. Park layouts can be changed easily and quickly and allow your aquapark to evolve. Add new and exciting components or Speedway and Swimstep connections on all eight sides using the integrated D-ring Interloc System and secure Vario-Lock cinch straps.



Includes:
- Universal Thunderdome
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, sliding, jumping, and resting.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

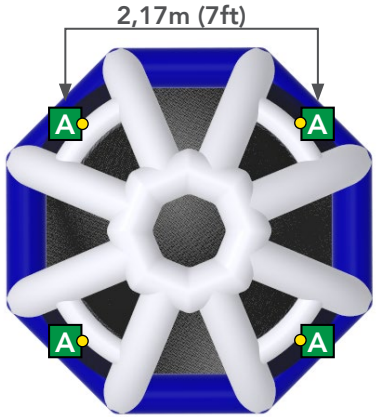

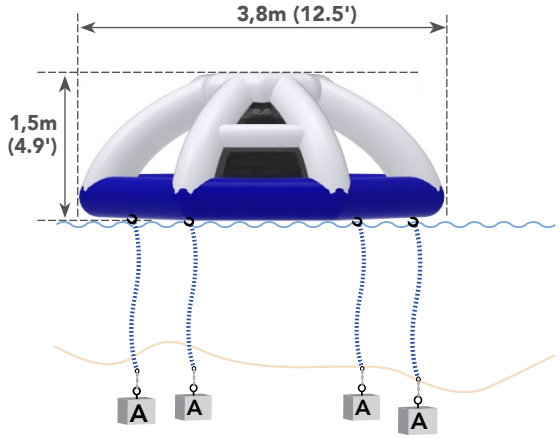

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	1,66m (5.4ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 | 5 | 5 5 | 5 | 5 | 5	MAIN [1] 1.8 psi (0,124 bar) UPPER [2] 1.8 psi (0,124 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

UNIVERSAL MONSOON

Aquaglide

Junction

Item Number: 585226164
SKU: 0790628048408
Dimensions: L 12.7' x W 12.7' x H 9'
(L 3,8m x W 3,8m x H 2,8m)

Box Dimensions:
L 35.4" x W 29.5" x H 19.7", 172 lbs. 1pc.
(L 90cm x W 75cm H 50cm, 78 kg)



Aquaglide pushes the boundaries of Aquapark design with its revolutionary patent-pending Monsoon Sprinkler System. The Monsoon shoots a carefully controlled spray of water from its center in a large radius, providing rainbows of color and a cooling spray that keeps users comfortable, equipment clean, and maximizes the wow-factor of sliding surfaces throughout the park. The Monsoon interchanges easily with existing Aquaglide Universal and Universal Thunderdome connectors to be easily retro-fitted to existing parks.

Includes:
- Universal Monsoon
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump
- Pump, hoses & components

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Keeping guests comfortable and equipment clean.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

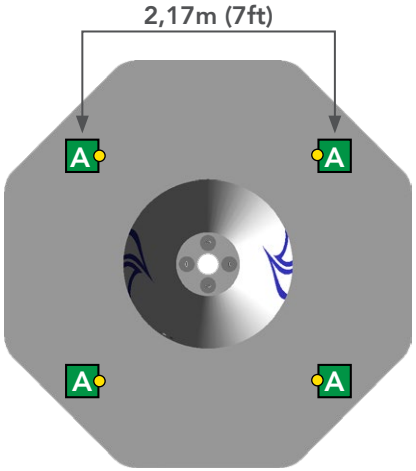

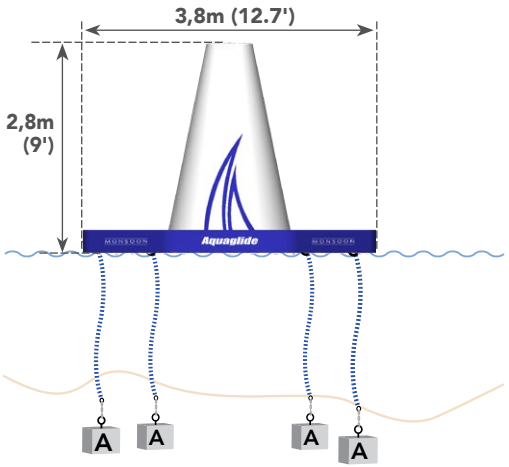

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	1,05m (3.5ft)	3m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5 | 5 | 5 5 | 5 | 5 | 5	MAIN [1] 2.0 psi (0,138 bar) CONE [2] 1.0 psi (0,069 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

UNIVERSAL ICECAP

Aquaglide

Junction

Item Number: 585226161
SKU: 0790628048378
Dimensions: L 12.6' x W 12.6' x H 3.5'
(L 3,8m x W 3,8m x H 1,1m)

Box Dimensions:
L 30" x W 22" x H 18", 125.7 lbs.
(L 76cm x W 56cm x H 45cm, 57 kg)



The Universal Icecap looks innocent enough, but this is one wiggly-giggly obstacle challenge! Bold users moonwalk across this waterborne bounce pillow, while others may prefer to balance along the perimeter. True to its' name when wet Icecap becomes as slippery as ice – a serious challenge! Ideally positioned as a hub, Universal Icecap connects on up to eight sides using our Interlock connection system.

Includes:
- Universal Icecap
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Bouncing, sliding and wiggly shenanigans.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

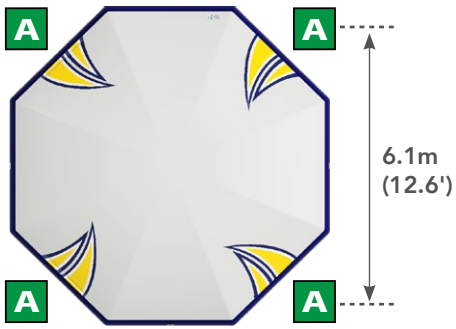

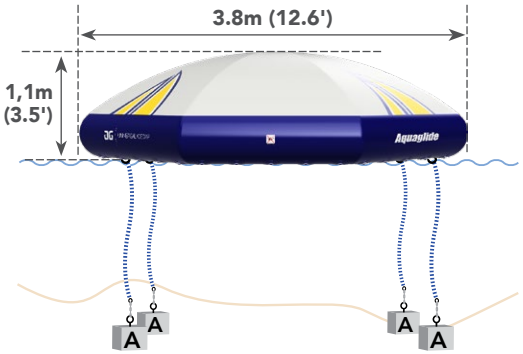

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
3 | 3	272 kg (600 lbs.)	1,38 (4.5ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 | 5| 5 5 | 5 | 5| 5	MAIN [1] 2.8 psi (0,193 bar) PILLOW [2] 0.12 psi (0,008 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

UNIVERSAL KEYHOLE

Aquaglide

Junction

Item Number: 585226162
SKU: 0790628048385
Dimensions: L 12.6' x W 12.6' x H 5.6'
(L 3,8m x W 3,8m x H 1,7m)

Box Dimensions:
L 36" x W 28" H 22", 132.1 lbs.
(L 90cm x W 70cm x H 55cm, 59,9 kg)

One of a kind! Universal Keyhole is a unique balance feature where guests choose between threading the needle on the center-beam with keyhole or walking the perilous perimeter path. Interior boarding tubes and handles help users reboard easily after a splashdown. Connects to any aquapark on up to eight sides using our Interlock connection system.



Includes:
- Universal Keyhole
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing and transiting to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Tubular / Double-I-Beam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

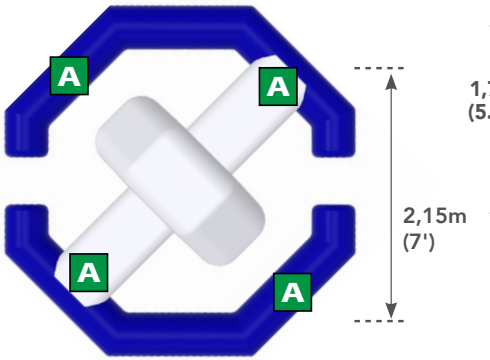

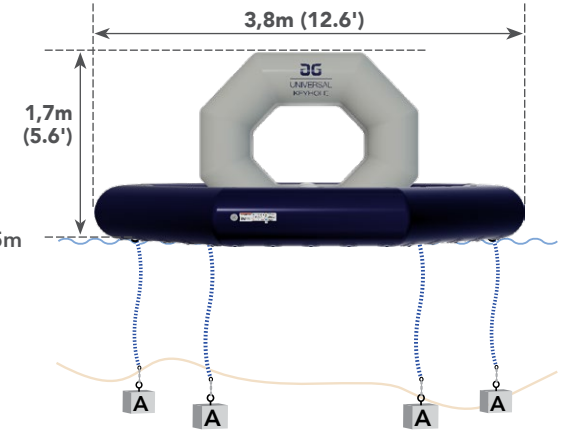

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
3 | 3	272 kg (600 lbs.)	1,76 (5.8ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 | 5| 5 5 | 5 | 5	MAIN [1] 1.8 psi (0,124 bar) KEYHOLE [2] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

UNIVERSAL PAVILION

Aquaglide

Junction

Item Number: 585226165
SKU: 0790628048415
Dimensions: L 12.6' x W 12.6' x H 12.4'
(L 3,9m x W 3,9m x H 3,8m)

Box Dimensions:
L 41" x W 33" x H 20", 191.8 lbs.
(L 103cm x W 83cm X H 49cm, 87kg)



The Universal Pavilion provides a convenient and comfortable shaded rest area, play area, or social space for up to six users. The rugged Cx3 commercial-grade construction and heavy-duty tent shade are designed to stand up to the elements and it connects to other Aquapark features on all eight sides. Use the Universal Pavilion as a standalone item or incorporate this feature into any Aquaglide Aquapark layout as a universal hub.

Includes:
- Universal Pavilion
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Socializing and lounging.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

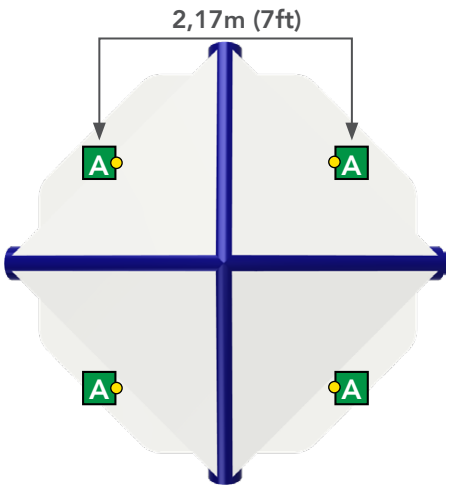

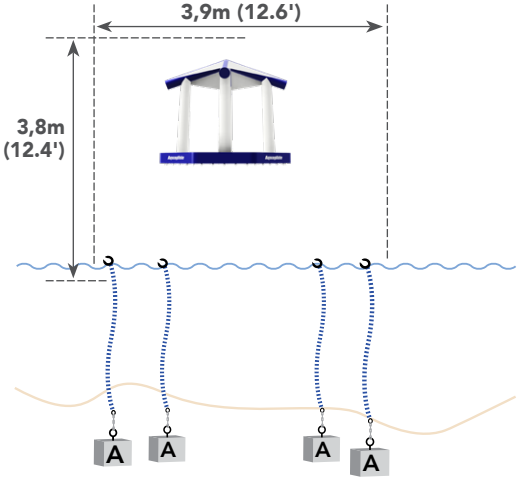

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	1,06m (3.5ft)	3,0m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5 | 5 | 5 5 | 5 | 5 | 5	Main [1] 1.2psi (0,083bar), Upper [2] 2.0psi (0,138bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

UNIVERSAL CONNECTION

Aquaglide

Junction

Item Number: 585225147
SKU: 0790628047739
Dimensions: L 12.5' x W 12.5' x H 1'
(L 3,8m x W 3,8m x H 0,3m)

Box Dimensions:
L 34.25" x W 30" x H 12", 142 lbs.
(L 87cm x W 75cm x H 30cm, 64 kg)



The Universal is Aquaglide's unique connection system that allows unlimited Aquapark designs and variations. The Universal's octagon shape allows Speedway and Swimstep connections to connect to all eight sides at once, offering multiple angles and unlimited possibilities. The Universal can be used as a hub or corner and allows park owners to evolve their park layout over time. The Universal connects to any Aquaglide Aquapark Series configuration using the integrated D-ring Interloc System and secure Vario-Lock cinch straps.

Includes:
- Universal Connection
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Socializing and lounging.

Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



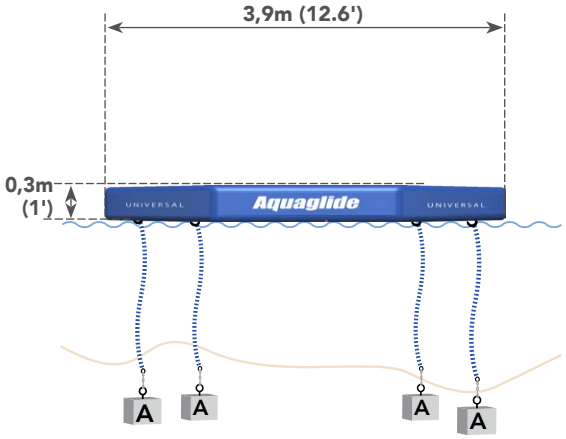

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	1,05m (3.5ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 | 5 | 5 5 | 5 | 5 | 5	MAIN [1] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

LANDING PAD

Aquaglide

Junction

Item Number: 585225143
SKU: 0790628047692
Dimensions: L 13.3' x W 13.8' x H 0.5'
(L 4,1m x W 4,2m x H 0,15m)

Box Dimensions:
L 41" x W 24" x H 10", 62 lbs.
(L 105cm x W 60cm x H 25cm, 28 kg)



Made from our extremely durable Duratex and drop-stitch materials, the Landing Pad 4M is built to last and can be used as a standalone item or connected to any Aquaglide Aquapark configuration using the integrated D-Ring Interloc system on all four sides. The Landing Pad can also be attached to our Docking Station and Ocean Pool products to help create the ultimate floating island.

Includes:
- Landing Pad
- 10 Vario Lock straps
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Socializing, lounging, and sunning.

Warranty:
3-year limited against any manufacturing defects.


Material:
0.80 mm / 15cm dropstitch


Construction:
Welded Dropstitch

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. Weighted anchors can be either poured concrete or Aquaglide's Lakefront Anchoring System.

It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor anchored items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

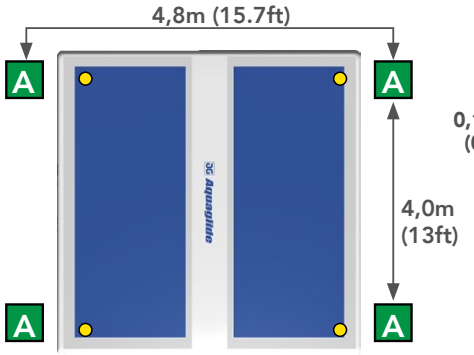

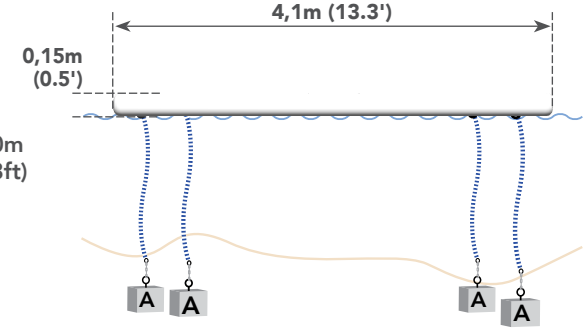

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
10 | 10	907 kg (2000 lbs.)	0,98m (3.2ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	9 | 5 | 9 | 5	10 VARIO-LOCK	MAIN [1] 5 psi (0,345 bar) [2] 5 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

TANGO

Aquaglide

Junction

Item Number: 585225146
SKU: 0790628047722
Dimensions: L 6.6' x W 6.6' x H 1.5'
(L 2m x W 2m x H 0,5m)

Box Dimensions:
L 30" x W 22" x H 12", 36 lbs. 1pc.
(L 76cm x W 56cm x H 30cm, 16 kg)

One of the most versatile pieces in the Aquaglide Aquapark range, the Tango is a bounce platform that works inline, as a corner, or as an X-junction between two perpendicular tracks. It can connect on all four sides using our secure and easy-to-use D-ring Interloc System end.



Includes:
- Tango
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Bouncing, jumping, and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

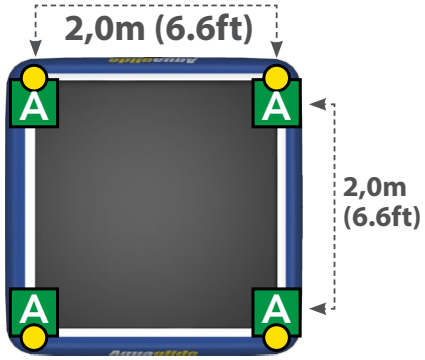

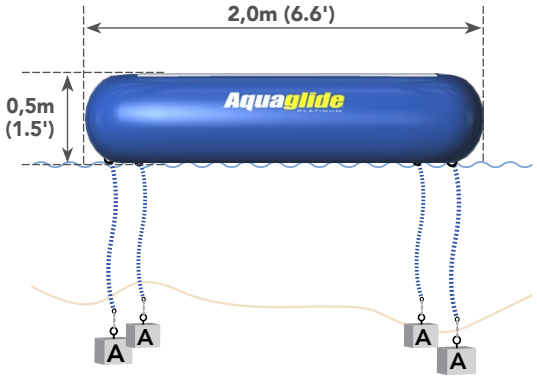

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,13m (3.7ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5 5 | 5	MAIN [1] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SPEEDWAY 20

Aquaglide

Boarding Features

Item Number: 585226148
SKU: 0790628048248
Dimensions: L 20' x W 5' x H 0.4'
(L 6,1m x W 1,5m x H 0,1m)

Box Dimensions:
L 30" x W 22" x H 17", 69 lbs. 1 pc.
(L 75cm x W 55cm X H 42cm, 36 kg)



The Speedway 20 is designed for higher traffic Aquaparks and those installed in extreme climates or closer to the equator. Whether a user chooses to walk, run, slip, slide, leap-frog, or cartwheel, the stable Speedway 20 is the piece that links together Aquapark features. Exceptional long-term durability offers many advantages, including ultra-low-profile boarding, for extra convenience. The Speedway is available in two sizes, the Speedway 10 and the Speedway 20.

Includes:
- Speedway 20
- 10 Vario Lock straps
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Transferring to other features.

Warranty:
3-year limited against any manufacturing defects.


Material:
10cm welded dropstitch

Construction:
Welded 2-layer DS - 4 layer seam

Mooring Diagram (optional)

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



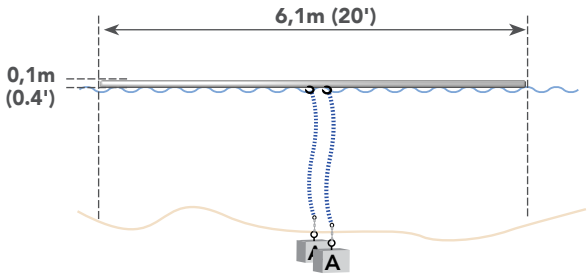

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	NUMBER OF ANCHOR WEIGHTS (OPTIONAL)	MIN. TOTAL ANCHOR WEIGHT (OPTIONAL)	MIN. WEIGHT PER ANCHOR (OPTIONAL)	STRAPS	D-RINGS	WORKING PRESSURE	ANCHOR RINGS
8 | 8	726 kg (1600 lbs.)	0,95m (3.1ft)	3m (10ft)	2	200 kg (500 lbs.)	100 kg (250 lbs.)	10 Vario-Lock	5 | 5 | 5 | 5	MAIN [1] 5.0 psi (0,345 bar)	2

© Copyright 2025 Aquaglide | Proprietary + Confidential

SPEEDWAY 10

Aquaglide


Boarding Features

Item Number: 585226147
SKU: 0790628048231
Dimensions: L 10' x W 5' x H 0.4' (L 3m x W 1,5m x H 0,1m)

Box Dimensions:
L 30" x W 22" x H 14", 40 lbs. 1 pc.
(L 75cm x W 55cm x H 35cm, 18 kg)

The Speedway 10 is designed for higher traffic Aquaparks and those installed in extreme climates or closer to the equator. Whether a user chooses to walk, run, slip, slide, leap-frog, or cartwheel, the stable Speedway 10 is the piece that links together Aquapark features. Exceptional long-term durability offers many advantages, including ultra-low-profile boarding, for extra convenience. The Speedway is available in two sizes, the Speedway 10 and the Speedway 20.





Includes:
Speedway 10
10 Vario Lock straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Rechargeable 120v 25 Pump

Best For:
Transferring to other features.

Warranty:
3-year limited against any manufacturing defects.

Material:
10 cm welded drop stitch

Construction:
Welded 2-layer DS - 4 layer seam

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	NUMBER OF ANCHOR WEIGHTS	STRAPS	D-RINGS	WORKING PRESSURE
5 | 5	454 kg (1000 lbs.)	0,95m (ft)	3m (10ft)	N/A	10 Two-Step Vario	5 | 5 5 | 5	MAIN [1] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SPLASHMAT

Aquaglide

Boarding Features

Item Number: 585226150
SKU: 0790628048262
Dimensions: L 18' x W 5' x H 0.4'
(L 5,5m x W 1,5m x H 0,1m)

Box Dimensions:
L 30" x W 22" x H 17", 98 lbs. 1 pc.
(L 75cm x W 55cm X H 42cm, 44,5 kg)



The Splashmat was designed for higher traffic Aquaparks and Aquaparks installed in extreme climates or closer to the equator. Produced with class-leading 10 cm Double-layer drop-stitch construction, the Splashmat inspires continuous, creative free-play where users can walk, run, slip, slide, leap-frog, and cartwheel down this stable platform. Use as a standalone item or connect to any Aquaglide Aquapark using the integrated D-ring Interloc System.

Includes:
- Splashmat
- 10 Vario Lock straps
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Bridle
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
A challenging transfer to other features.

Warranty:
3-year limited against any manufacturing defects.


Material:
10 cm welded dropstitch

Construction:
Welded 2-layer DS - 4 layer seam

Mooring Diagram (Optional)

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



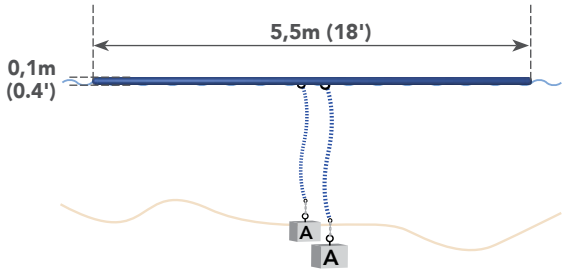

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	NUMBER OF ANCHOR WEIGHTS (OPTIONAL)	MIN. TOTAL ANCHOR WEIGHT (OPTIONAL)	MIN. WEIGHT PER ANCHOR (OPTIONAL)	STRAPS	D-RINGS	WORKING PRESSURE	ANCHOR RINGS
6 | 6	544 kg (1200 lbs.)	0,95m 3.1ft)	3m (10ft)	2	200 kg (500 lbs.)	100 kg (250 lbs.)	10 Vario-Lock	5 | 5	MAIN [1] 5.0 psi (0,345 bar)	2

© Copyright 2025 Aquaglide | Proprietary + Confidential

SWIMSTEP XL

Aquaglide


Boarding Features

Item Number: 585226157
SKU: 0790628048330
Dimensions: L 5' x W 6.5' x H 0.4'
(L 1,5m x W 2m x H 0,1m)

Box Dimensions:
L 30" x W 22" x H 12", 48 lbs. 1 pc
(L 75cm x W 55cm x H 30cm, 21,5 kg)

The Swimstep 5×5 is an ergonomic platform that provides improved access over traditional boarding ladders due to its low-profile design. Produced with class-leading 10 cm Double-layer drop-stitch construction, the Swimstep 5×5 is designed for exceptional durability and connected to any Aquapark using the 5 D-Ring Interloc System.





Includes:
Swimstep XL
10 Vario Lock straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Rechargeable 120v 25 Pump

Best For:
Sliding or jumping.

Warranty:
3-year limited against any manufacturing defects.

Material:
10 cm welded drop stitch

Construction:
Welded 2-layer DS -
4 layer seam

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	NO ANCHORING REQUIRED	STRAPS	D-RINGS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	0,95m (3.1ft)	3m (10ft)		10 Vario-Lock	5 | 5 | 5 | 5	MAIN [1] 5.0psi (0,345) bar

© Copyright 2025 Aquaglide | Proprietary + Confidential

SWIMSTEP 5X5

Aquaglide


Boarding Features

Item Number: 585226156
SKU: 0790628048323
Dimensions: L 5' x W 5' x H 0.4'
(L 1,5m x W 1,5m x H 0,1m)

Box Dimensions:
L 30" x W 22" x H 12", 48 lbs. 1 pc
(L 75cm x W 55cm x H 30cm, 21,5 kg)

The Swimstep 5×5 is an ergonomic platform that provides improved access over traditional boarding ladders due to its low-profile design. Produced with class-leading 10 cm Double-layer drop-stitch construction, the Swimstep 5×5 is designed for exceptional durability and connected to any Aquapark using the 5 D-Ring Interloc System.





Includes:
Swimstep 5x5
10 Vario Lock straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Rechargeable 120v 25 Pump

Best For:
Sliding or jumping.

Warranty:
3-year limited against any manufacturing defects.

Material:
10 cm welded drop stitch

Construction:
Welded 2-layer DS -
4 layer seam

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT		STRAPS	D-RINGS	WORKING PRESSURE
1 | 1	114 kg (250 lbs.)	0,95m (3.1ft)	3m (10ft)	NO ANCHORING REQUIRED	10 Vario-Lock	5 | 3 | 5 | 3	MAIN [1] 5.0 psi (0,345) bar

© Copyright 2025 Aquaglide | Proprietary + Confidential

SWIMSTAIRS XL


Aquaglide

Boarding Features

Item Number: 585225150
SKU: 0790628047760
Dimensions: L 6.6' x W 5.1' x H 1.9'
(L 2,00m x W 1,55m x H 0,59m)

Box Dimensions:
L 26.8" x W 17.7" x H 9.8", 54 lbs. 1 pc
(68cm x 45cm x 25cm, 24.5kg)

Extra-easy boarding feature improves aquapark access for users of all ages and abilities. Provides a stepped ramp and plentiful handles to allow convenient re-boarding, even for guests with limited fitness. 5-Ring connections on 3 sides.

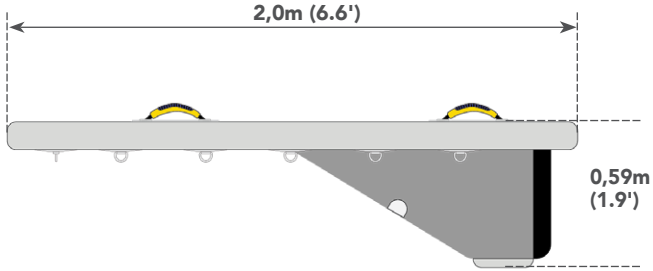



Includes:
Swimstairs XL
10 Vario Lock straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Rechargeable 120v 25 Pump

Best For:
Easy Boarding

Warranty:
3-year limited against any manufacturing defects.

Material:
15 cm welded drop stitch

Construction:
Welded FSL DS -
4 layer seam

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT		STRAPS	D-RINGS	WORKING PRESSURE
2 | 2	159 kg (350 lbs.)	0,98m (3.2ft)	3m (10ft)	NO ANCHORING REQUIRED	10 Vario-Lock	5 | 5 | 5	MAIN [1] 5.0 psi (0,345) bar

© Copyright 2025 Aquaglide | Proprietary + Confidential

SUPERTRAMP 23

Aquaglide

Trampolines & Bouncers

Item Number: 585226154
SKU: 0790628048309
Dimensions: L 22.5' x W 22.5' x H 3.3'
(L 7m x W 7m x H 1m)
17.3' jump surface (5,3m)

Box Dimensions:
Box 1: Tube: L 31.5" x W 23.5" x H 16.5", 157 lbs.
(L 80cm x W 60cm x W 42cm, 71 kg)

Box 2: Spring pad + Springs: L 80" x W 17" x H 11.25", 70 lbs.
(L 203cm x W 43cm x H 29cm, 32 kg)

Box 3: Frame + Mesh + Bolts: L 82" x W 14" x H 6", 110 lbs.
(L 208cm x W 36cm x H 14,5cm, 50 kg)

Box 4: Swimstep: L 14.5" x W 7" x H 21" 20 lbs. 1 pc.
(L 37cm x W 18cm x H 53cm, 9,1 kg)



The Supertramp 23 provides an outstanding jumping, bouncing, and launching platform supported by a heavy-duty galvanized steel frame and robust springs. Use the Supertramp 23 trampoline as a standalone item, or connect to any Aquaglide Aquapark layout configuration using the integrated D-ring Interloc System. The Supertramp is not only a trampoline; it's a floating centerpiece for users to soar above the water.

Includes:
- Supertramp 23
- Swimstep
- 4-way mooring bridle
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Bouncing, jumping, launching, and lounging.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31oz PVC weight

Construction:
Tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

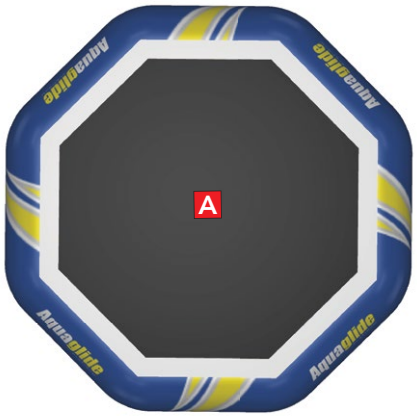

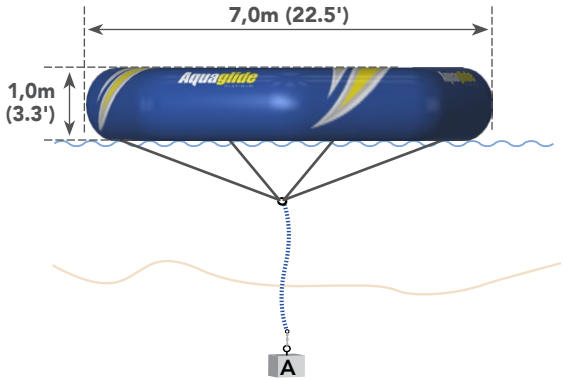

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	4-WAY MOORING BRIDLE	D-RINGS	WORKING PRESSURE
Bouncing 3 | 3 Lounging 5 | 5	454 kg (1000 lbs.)	2,44m (8ft)	4,5m (15ft)	500 kg (1000 lbs.)	500 kg (1000 lbs.)	1	4	1 Included	5 | 5 | 5 +2 (log), 5	MAIN 0.8 psi (0,055 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SUPERTRAMP 17

Aquaglide

Trampolines & Bouncers

Item Number: 585226153
SKU: 0790628048293
Dimensions: L 17' x W 17' x H 3.3'
(L 5,2m x W 5,2m x H 0,9m)
12.9' jump surface (3,9m)

Box Dimensions:
Box 1: Tube + Mesh + Springs + Bolts:
L 61" x W 18.5" x H 11.5", 90 lbs.
(L 155cm x W 47cm x H 29cm, 41 kg)

Box 2: Frame + Spring pad + PE rope:
L 31.5" x W 23.5" x H 14.5", 143 lbs.
(L 80cm x W 60cm x 37cm, 65 kg)

Box 3: Swimstep: L 14.5" x W 7" x H 21", 20 lbs. 1 pc.
(L 37cm x W 18cm x H 53cm, 9,1 kg)



The Supertramp 17 provides an outstanding jumping, bouncing, and launching platform supported by a heavy-duty galvanized steel frame and robust springs. Use the Supertramp 17 trampoline as a standalone item, or connect to any Aquaglide Aquapark layout configuration using the integrated D-ring Interloc System. The Supertramp is not only a trampoline; it's a floating centerpiece for users to soar above the water.

Includes:
- Supertramp 17
- Swimstep
- 4-way mooring bridle
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Bouncing, jumping, launching, and lounging.

Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31oz PVC weight

Construction:
Tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



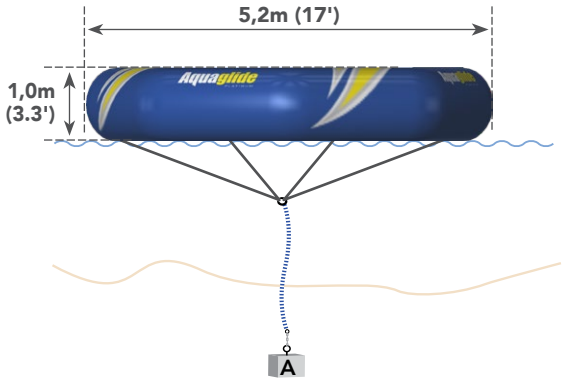

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	4-WAY MOORING BRIDLE	D-RINGS	WORKING PRESSURE
Bouncing 3 | 3 Lounging 4 | 4	363 kg (800 lbs.)	2,44m (8ft)	4,5m (15ft)	250 kg (500 lbs.)	250 kg (500 lbs.)	1	4	1 Included	5 | 5 5+2 (log), 5	MAIN 0.8 psi (0,055 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

REBOUND 20

Aquaglide

Trampolines & Bouncers

Item Number: 585226139
SKU: 0790628048156
Dimensions: L 20' x W 20' x H 3.2'
(L 6m x W 6m x H 1m)

Box Dimensions:
L 41" x W 27" H 14", 136 lbs. 1 pc.
(L 102cm x W 68cm x H 36cm, 62 kg)



The eight-sided design of the Rebound 20 offers excellent trampoline-like bounce that is easier to set-up and maintain compared to trampolines with metal frames and springs. Made of RF welded Duratex and #316 stainless steel welded ring plates, this product comes complete with a Swimstep access platform and heavy duty molded boarding and transport handles. The Rebound 20 is an excellent alternative to a trampoline.

Includes:
- Rebound 20
- Swimstep
- 4-way mooring bridle
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Bouncing, jumping, launching, and lounging.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / 31oz PVC weight

Construction:
Tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

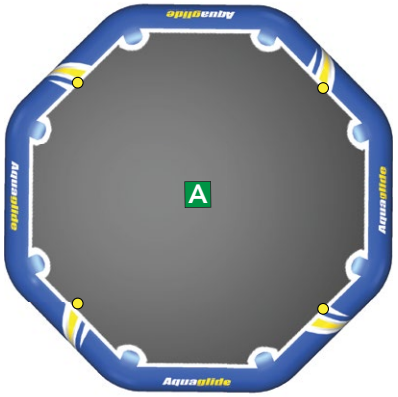

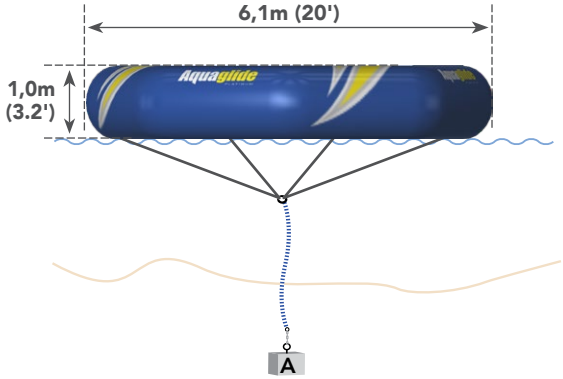

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	4-WAY MOORING BRIDLE	STRAPS	D-RINGS	WORKING PRESSURE
Bouncing 3 | 3 Lounging 7 | 7	544 kg (1200 lbs.)	2,44m (8ft)	4,5m (15ft)	250 kg (500 lbs.)	250 kg (500 lbs.)	1	4	1 Included	3	5 | 5 | 5 + 2 (log), 5 + 4 (slide)	MAIN 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

EL JEFE CLIMBING WALL


Aquaglide

Accessories

Item Number: 585225139
SKU: 0790628047654
Dimensions: L 6.0' x W 0.5' x H 13.3'
(L 1,83m x W 0,15m x H 4,06m)

Box Dimensions:
L 66.9" x W 12.6" x H 9.8", 70.5 lbs.
(L 170cm x W32cm x H 25cm, 32,0 kg)

Athletic climbers are immediately drawn to the El Jefe Climbing Wall which will challenge even the best of them. Strong molded climbing handles and lightly textured toeholds provide the only support for attempting this vertical slab, which requires strength, skill and persistence. The top 1/3rd of the ascent overhangs the rest, demanding even more from tired climbers and adding fun to the dismount. El Jefe Climbing wall can be attached to El Jefe Signature Feature on either side, allowing for optimal sight lines.

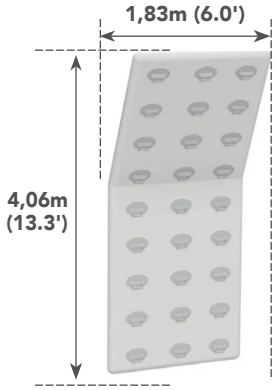



Includes:
El Jefe Climbing Wall
9 Vario Straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Aquapark 110v 73 Pump

Best For:
Climbing

Warranty:
3-year limited against any manufacturing defects.

Material:
15 cm Dropstitch

Construction:
Welded 3-Layer Seams

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	NO ANCHORING REQUIRED	ATTACHES TO EL JEFE WITH 5 D-RINGS ON BACK AND 4 D-RINGS ON SIDES	STRAPS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
1 | 1	113 kg (250 lbs.)	2,93m (9.6ft)	4,5m (15ft)			0	0	5 | 2 | 2	5.0psi (0,345) bar

© Copyright 2025 Aquaglide | Proprietary + Confidential

ESCALADE SUMMIT CLIMBING WALL


Aquaglide

Accessories

Item Number: 585215113
SKU: 0790628047746
Dimensions: L 4.1' x W 5' x H 12'
(L 1,3m x W 1,4m x H 3,7m)

Box Dimensions:
L 37.4" x W 28.3" x H 17.7", 138 lbs. 1pc.
(L 95cm x W 72cm x H 45cm, 62,8 kg)

At well over 16-feet tall, the Escalade Summit climbing wall presents a Deep Water Solo climbing style adrenaline rush that is not for the faint-of-heart. Reinforced handles and oversized footsteps lead from water level to the summit while integrated guard-buoys help protect the landing zone. This commanding piece connects exclusively to the Aquaglide Summit Express.

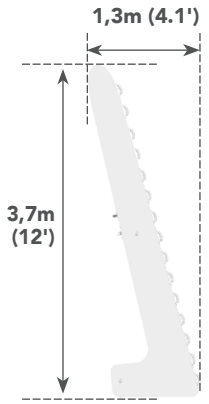



Includes:
Escalade Summit
4 Escalade Straps
5 Interlock straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Rechargeable 120v 25 Pump

Best For:
Climbing

Warranty:
3-year limited against any manufacturing defects.

Material:
0.80 mm / 28 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT			STRAPS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
1 | 1	114 kg (250 lbs.)	3,34m (10.9ft)	4,5m (15ft)	NO ANCHORING REQUIRED	ATTACHES TO SUMMIT WITH 5 D-RINGS ON BACK AND 2 D-RINGS ON SIDES	ESCALADE: 4 INTERLOCK: 5	4	5	MAIN [1] 1.0psi (0,069) bar

© Copyright 2025 Aquaglide | Proprietary + Confidential

SWIMSTEP

Aquaglide


Accessories

Item Number: 585226155
SKU: 0790628048316
Dimensions: L 5' x W 3.5' x H 0.7'
(L 1,5m x W 1,1m x H 0,2m)

Box Dimensions:
L 22" x W 13" x H 6", 12.1 lbs. 1 pc
(L 55cm x W 33cm x H 15cm, 5,5 kg)

Constructed out of I-Beam technology, the Swimstep provides easy off and on access to Aquaglide Supertramp and Rebound bouncers or other Aquapark features. With low clearance, users can efficiently move from water level to standing without strain.





Includes:
Swimstep
3 Vario straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Rechargeable 120v 25 Pump

Best For:
Access to or transferring to features.

Warranty:
3-year limited against any manufacturing defects.

Material:
0.60 mm / 22 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT		STRAPS	D-RINGS	WORKING PRESSURE
1 | 1	114 kg (250 lbs.)	1,01m (3.3ft)	3m (10ft)	NO ANCHORING REQUIRED	3 Vario Straps	3	MAIN [1] 0.8 psi (0,055) bar

© Copyright 2025 Aquaglide | Proprietary + Confidential

PLUNGE SLIDE


Aquaglide

Accessories

Item Number: 585226137
SKU: 0790628048132
Dimensions: L 6.6' x W 5.4' x H 4.4'
(L 2m x W 1,7m x H 1,4m)

Box Dimensions:
L 30 x W 22" x H 7" 36.6 lbs. 1 pc.
(L 75cm x W 55cm x H 16cm, 16,6 kg)

The Plunge Slide is designed to fit most Aquaglide water trampolines with a 35" to 40" tube diameter, including Supertramp models. The double-wide 60" sliding surface leaves plenty of room for up to 2 users. The Plunge attaches with a modified version of our Vario-Lock cinch strap system with no connection rings required on trampolines.

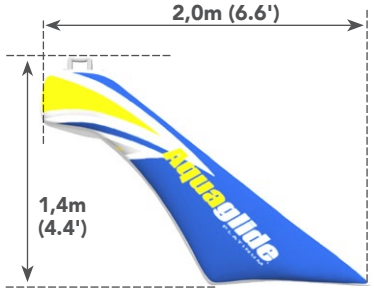



Includes:
Plunge slide
2 Plunge straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Rechargeable 120v 25 Pump

Best For:
Sliding or jumping.

Warranty:
3-year limited against any manufacturing defects.

Material:
0.60 mm / 22 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT		STRAPS	D-RINGS	WORKING PRESSURE
1 | 1	114 kg (250 lbs.)	2,44m (8ft)	3m (10ft)	NO ANCHORING REQUIRED	2 Plunge straps	3 | 3	MAIN [1] 0.8 psi (0,055) bar

© Copyright 2025 Aquaglide | Proprietary + Confidential

BLAST BAG

Aquaglide

Accessories

Item Number: 585226107
SKU: 0790628047838
Dimensions: L 12' x W 5.4' x H 3'
(L 3,7m x W 1,7m x H 1m)

Box Dimensions:
L 18.5" x W 15.5" x H 12.5", 44 lbs. 1 pc.
(L 58cm x W 42cm x H 30cm, 15,5 kg)



The Blast Bag uses the powerful force of air to blast friends, relatives, and guests skyward, then down for a splash landing. An integrated wedge helps focus the blast force for massive thrills and adds stability for boarding. The Blast Bag attaches to all Aquaglide Rebound models and Jungle Series play stations using our Vario-Lock cinch strap system.

Includes:
- Blast Bag
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Bridle
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Launching.

Warranty:
90-Days limited against any manufacturing defects.

Material:
0.60 mm / 28oz PVC weight


Construction:
Double I-Beam Wedge - welded 3 layer seam

Mooring Diagram (optional)

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



B

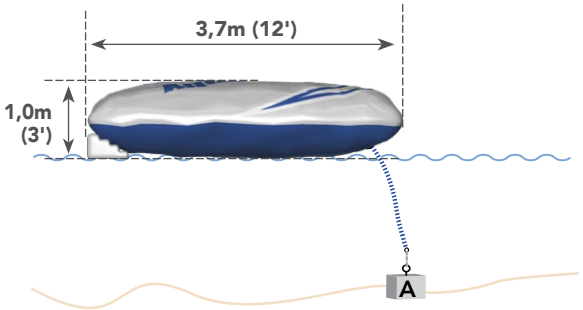

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT (OPTIONAL)	MIN. WEIGHT PER ANCHOR (OPTIONAL)	NUMBER OF ANCHOR WEIGHTS	STRAPS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	2,44m (8ft)	12m (40ft)	100 kg (250 lbs.)	100 kg (250 lbs.)	2 OPTIONAL	5 Vario	1	5	WEDGE [1] 1.0 psi (0,069 bar) BAG[2] 50% FILL (No Pressure)

© Copyright 2025 Aquaglide | Proprietary + Confidential

ROCKIT

Aquaglide

Rockers

Item Number: 585226142
SKU: 0790628048187
Dimensions: L 13' x W 13' x H 5.5'
(L 4m x W 4m x H 1,7m)

Box Dimensions:
L 37" x W 28" x H 17", 112 lbs. 1 pc.
(L 95cm x W 72cm x H 42cm, 50,5 kg)

One of our most popular product families, the versatile, circular Rockit water rocker offers various stations to accommodate users of all sizes and ages to work together as a team or individually. With two sizes available (the larger Rockit and our smaller Rockit Jr.), the Rockit Series provides endless opportunities to balance, rock, and roll.



Includes:
- Rockit
- 3-way bridle
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Launching.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.80 mm / 28oz PVC weight

Construction:
Tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

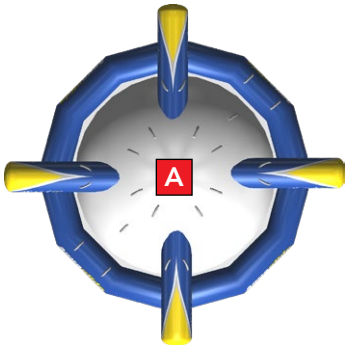

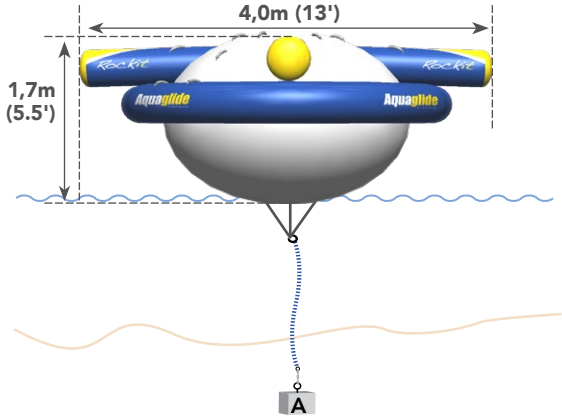

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	3-WAY MOORING BRIDLE	WORKING PRESSURE
5 | 5	454 kg (1000 lbs.)	1,70m (5.6ft)	4,5m (15ft)	500 kg (1000 lbs.)	500 kg (1000 lbs.)	1	1	1 Included	MAIN [1] 0.75psi (0,052 bar), PERIMETER [2] 2.25psi (0,155 bar), SADDLE TUBES [3] 1.9psi (0,131 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

ROCKIT JR

Aquaglide

Rockers

Item Number: 585226143
SKU: 0790628048194
Dimensions: L 9.5' x W 9.5' x H 3.6'
(L 3m x W 3m x H 1,1m)

Box Dimensions:
L 30" x W 22" x H 16", 72 lbs. 1 pc.
(L 75cm x W 56cm x H 41cm, 33 kg)

One of our most popular product families, the versatile, circular Rockit water rocker offers various stations to accommodate users of all sizes and ages to work together as a team or individually. With two sizes available (the larger Rockit and our smaller Rockit Jr.), the Rockit Series provides endless opportunities to balance, rock, and roll.



Includes:
- Rockit Jr.
- 3-way bridle
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing, rocking, and team building.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.80 mm / 28oz PVC weight

Construction:
Tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

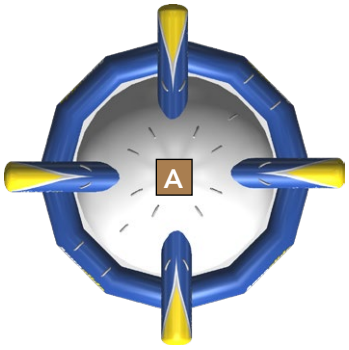

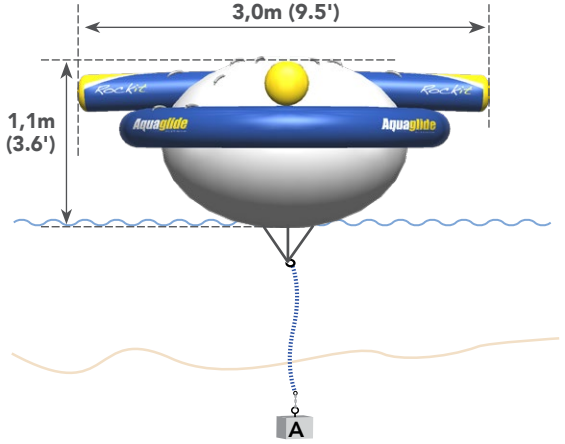

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	3-WAY MOORING BRIDLE	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,49m (4.9ft)	3m (10ft)	250 kg (500 lbs.)	250 kg (500 lbs.)	1	3	1 Included	MAIN [1] 0.75psi (0,052 bar), PERIMETER [2] 2.0psi (0,138 bar), SADDLE TUBES [3] 1.9psi (0,131 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

AXIS ROCKER

Aquaglide

Rockers

Item Number: 585226159
SKU: 0790628048354
Dimensions: L 12' x W 7.7' x H 5'
(L 3,7m x W 2,4m x H 1,6m)

Box Dimensions:
L 30" x W 22" x H 12", 49 lbs. 1 pc.
(L 75cm x W 55cm x H 30,5cm, 22 kg)



Users love rocking back and forth on the seesaw-like Axis while trying to keep opponents off balance. The perfect piece for small groups of up to four users, the Axis is especially suitable for younger users thanks to a low-profile design and moderate water depth requirements. Includes an integrated boarding system.

Includes:
- Axis Rocker
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing, rocking, and team building.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.80 mm / 28oz PVC weight

Construction:
Tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

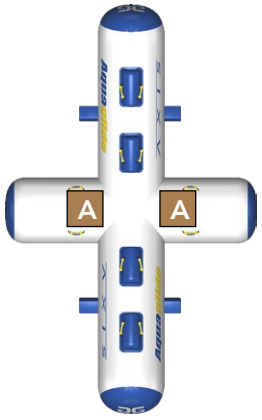

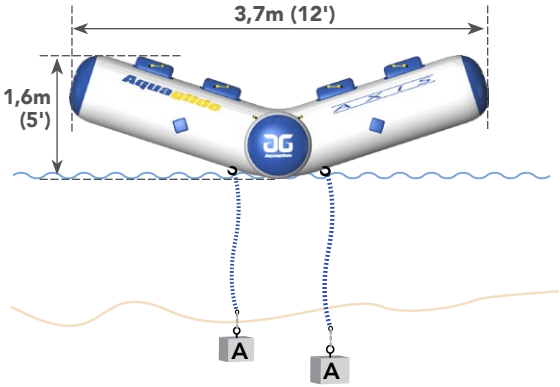

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	WORKING PRESSURE
4 | 4	362 kg (800 lbs.)	1,36m (4.5ft)	3m (10ft)	500 kg (1000 lbs.)	250 kg (500 lbs.)	2	2	MAIN [1] 2.5psi (0,172 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

LAZY LOUNGE

Aquaglide

Lakefront

Item Number: 585226127
SKU: 0790628048033
Dimensions: L 8.9' x W 10.1' x H 1.5'
(L 2,72m x W 3,09m x H 0,45m)

Box Dimensions:
L 30" x W 22" x H 10", 66.1 lbs.
(L 76cm x W 56cm x H 25cm, 30 kg)



During the dog days of summer, the Lazy lounge is the place to be when out on the water. The Lazy Lounge has room to comfortably seat up to six adults or children with its spacious drop-stitch platform and comfortable backrests. Integrated soaker mesh footwell and four drink holders help you cool off and hydrate during those hot and humid mid-summer days. Use the Lazy Lounge as a standalone item or connect it to other Aquaglide residential park accessories.

Includes:
- Lazy Lounge
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Beating the summer heat with friends and family at the lake.

Warranty:
3-year limited Residential / 1-year light Commercial against any manufacturing defects.


Material:
0.70 mm / 25 oz.


Construction: 15cm Dropstitch, Tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. Weighted anchors can be either poured concrete or Aquaglide's Lakefront Anchoring System.

It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor anchored items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

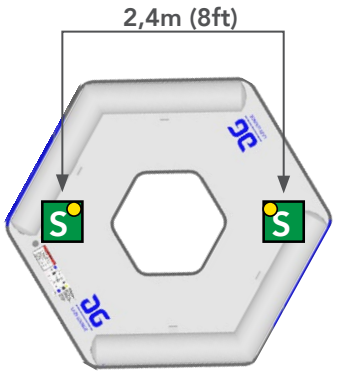

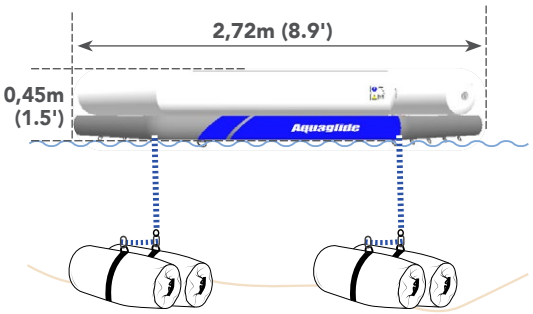

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	1,13m (3.7ft)	3m (10ft)	200 kg (500 lbs.)	100 kg (250 lbs.)	2	2	5 | 5	MAIN [1] 5.0 psi (0,345 bar), TUBE [2] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

O.G. LOUNGE

Aquaglide

Liquid Lounge Series

Item Number: 585226131
SKU: 0790628048071
Dimensions: L 10' x W 10' x H 7.5'
(L 3,05m x W 3,05m x H 2,27m)

Box Dimensions:
L 115cm x W 75cm x H 50cm, 90kg



As part of Aquaglide's Lounge series, the OG Lounge is an ideal waterfront hangout for family-sized groups. With its integrated barstool seating, raised table, cupholders, and shaded canopy top, the OG Lounge accommodates up to six users and creates a versatile on-the-water social space. Use the OG Lounge as a standalone item or connect it to other Aquaglide accessories.

Includes:
- O.G. Lounge
- Storage Wrap
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock™ straps
- Inflation pump

Recommended Items:
- Accelerator HP 12v 20 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Socializing and lounging

Warranty:
Limited 3-year Lakefront / 1-year light Commercial


Material:
Welded DS 15cm + 0.90mm Cx3


Construction:
Welded structural tube construction with 3-layer seams

Mooring Diagram (option)

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. Weighted anchors can be either poured concrete or Aquaglide's Lakefront Anchoring System.

It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor anchored items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

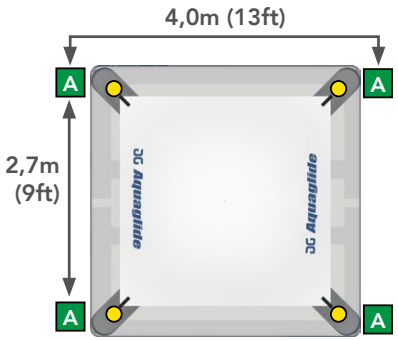

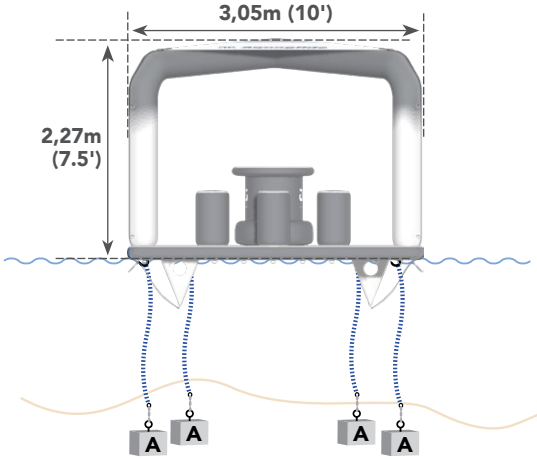

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	0,98m (3.2ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	7 | 0 | 7 | 0	Main [1] 5.0psi (0,345bar), Upper [2] 4.0psi (0,276bar), Base [3] 1.2psi (0,083bar), Table [4] 5.0psi (0,345bar), Seats [5] 1.5psi (0,103bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

OHANA LOUNGE

Aquaglide

Liquid Lounge Series

Item Number: 585226132
SKU: 0790628048088
Dimensions: L 10' x W 10' x H 7.44'
(L 3,05m x W 3,05m x H 2,27m)

Box Dimensions:
L 115cm x W 75cm x H 45cm, 85kg



The Ohana Lounge is an ideal waterfront social lounge for family-sized groups. This lounge features two comfy bench seats, a table with integrated cupholders, mesh-bottom cooler cutout, and a shaded canopy cover for maximum relaxation. The Ohana Lounge accommodates six users and can be used as a standalone feature or as part of any Aquaglide park layout.

Includes:
- Ohana Lounge
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock™ straps
- Inflation pump

Recommended Items:
- Accelerator HP 12v 20 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Socializing and lounging

Warranty:
Limited 3-year Lakefront / 1-year light Commercial


Material:
Welded DS 15cm + 0.90mm Cx3


Construction:
Welded structural tube construction with 3-layer seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. Weighted anchors can be either poured concrete or Aquaglide's Lakefront Anchoring System.

It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor anchored items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

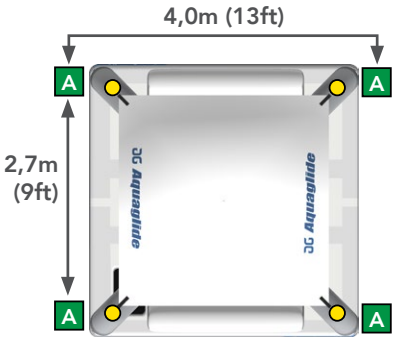

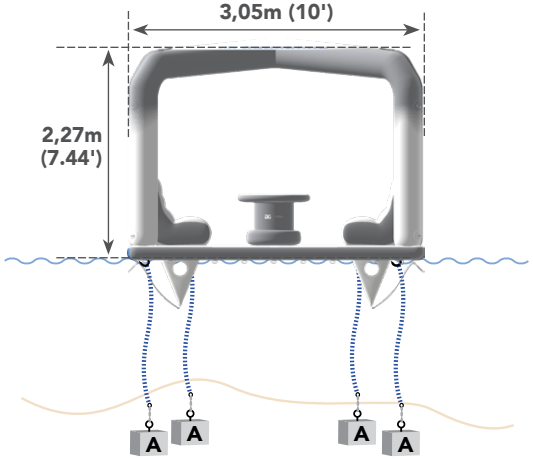

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	0,98m (3.2ft)	3m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	7 | 0 | 7 | 0	Main [1] 5.0psi (0,345bar), Upper [2] 4.0psi (0,276bar), Base [3] 1.2psi (0,083bar), Table [4] 5.0psi (0,345bar), Seats [5] 1.0psi (0,069bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SOLARIUM

Aquaglide

Liquid Lounge Series

Item Number: 585226146
SKU: 0790628048224
Dimensions: L 10' x W 4.2' x H 0.5'
(L 3,05m x W 1,6m x H 0,15m)

Box Dimensions:
L 170cm x W 32cm x H 25cm, 30,6 kg



Part of the Aquaglide Lounge Series, the Solarium is a waterfront social lounge deck ideal for family-sized groups. Bask in the sun while others take their beverages in the shade by connecting the Solarium to one or more of our shaded Liquid Lounges. The Solarium can be used as a standalone accessory or extra social space on any Aquaglide park layout.

Includes:
- Solarium
- 14 Vario Lock™ straps
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Accelerator HP 12v 20 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Socializing, lounging, and sunning

Warranty:
Limited 3-year Lakefront / 1-year light Commercial

Material:
15 cm dropstitch single layer


Construction:
Welded dropstitch

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. Weighted anchors can be either poured concrete or Aquaglide's Lakefront Anchoring System.

It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor anchored items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



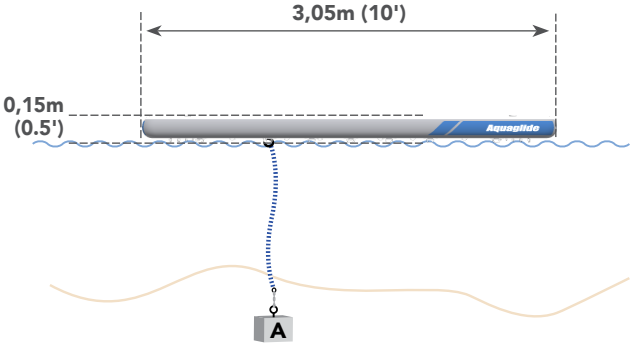

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	STRAPS	D-RINGS	WORKING PRESSURE
5 | 5	454 kg (1000 lbs.)	0,98m (3.2ft)	3,0m (10ft)	250 kg (500 lbs.)	250 kg (500 lbs.)	1	1	1	14 Vario Lock Straps	7 | 5 | 7 | 5	Main [1] 5.0psi (0,345bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

OCEAN POOL 5M X 6M

Aquaglide

Yacht

Item Number: 585219693
SKU: 0790628042819
Dimensions: L 20' x W 16.6' x H 0.5'
(L 6,1m x W 5,1m x H 0,15m)

Box Dimensions:
L 46" x W 30" x H 17", 177 lbs.
(L 115cm x W 75cm x H 42cm, 80 kg)



A more extensive take on the Ocean Pool 4×4, the 5×6 Ocean Pool boasts an 8' (2.4 m) deep mesh enclosure, with an increased footprint. Our Ocean Pools provide a deep mesh enclosure designed to keep out even the smallest jellyfish and unwanted sea life. With space to lounge and swim in peace, the Ocean Pool quickly becomes the focal point of any yacht. Add Aquaglide accessories to the outside edges of the pool using the Vario-Lock cinch strap attachment system. It can be anchored on its own or used off the back of a yacht.

Includes:
- Ocean Pool 5m x 6m
- 10 Vario Lock straps
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Open water swimming.


Warranty:
3-year limited against any manufacturing defects.

Material:
0.80 mm / 15cm dropstitch

Construction:
Welded Dropstitch

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

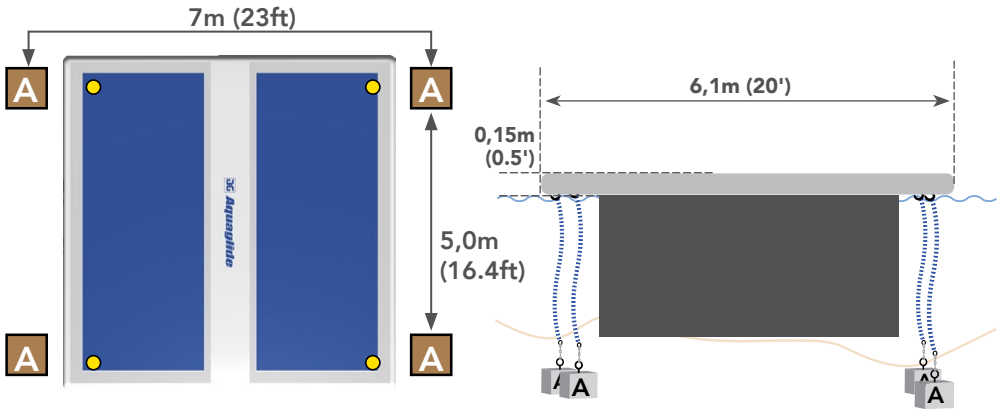

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
10 | 10	726 kg (1600 lbs.)	3,05m (10ft)	3m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	9 | 5 | 9 | 5	10 VARIO-LOCK	MAIN [1] 5.0 psi (0,345 bar) [2] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

OCEAN POOL 4M X 4M

Aquaglide

Yacht

Item Number: 585219692
SKU: 0790628042802
Dimensions: L 13.3' x W 13.8' x H 0.5'
(L 4,1m x W 4,2m x H 0,15m)

Box Dimensions:
L 46" x W 30" x H 17", 177 lbs.
(L 115cm x W 75cm x H 42cm, 80 kg)



The Ocean Pool is a portable floating pool with an 8' (2,4 m) deep mesh enclosure designed to keep out even the smallest jellyfish and unwanted sea life. With space to lounge and swim in peace, the Ocean Pool quickly becomes the focal point of any yacht. Add Aquaglide accessories to the outside edges of the pool using the Vario-Lock cinch strap attachment system. It can be anchored on its own or used off the back of a yacht.

Includes:
- Ocean Pool 4m x 4m
- 10 Vario Lock straps
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Open water swimming.


Warranty:
3-year limited against any manufacturing defects.

Material:
0.80 mm / 15cm dropstitch

Construction:
Welded Dropstitch

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

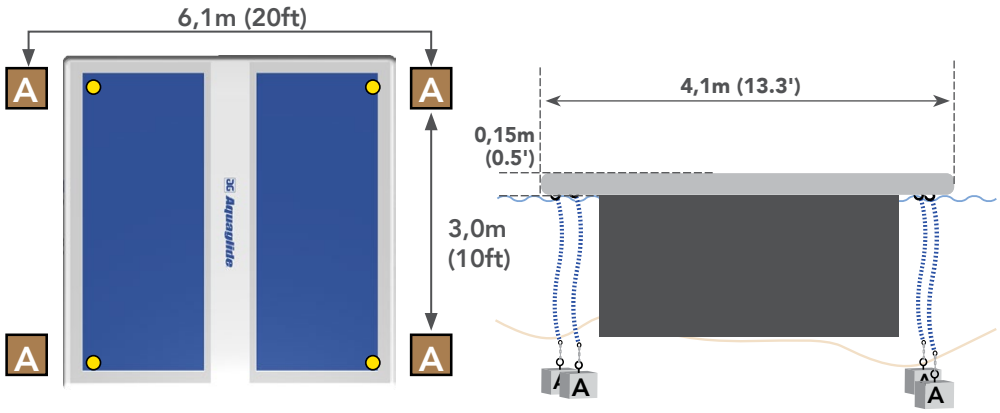

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
8 | 8	726 kg (1600 lbs.)	3,05m (10ft)	3m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	9 | 5 | 9 | 5	10 VARIO-LOCK	MAIN [1] 5.0 psi (0,345 bar) [2] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

DOCKING STATION

Aquaglide

Yacht

Item Number: 585219694
SKU: 0790628042826
Dimensions: L 14.8' x W 10.4' x H 0.5'
(L 4,5m x W 3,2m x H 0,15m)

Box Dimensions:
L 46" x W 30" x H 12", 117 lbs.
(L 115cm x W 75cm x H 30cm, 53 kg)



Constructed for outstanding performance and durability, the Docking Station can be used as a standalone item or connected to the Ocean Pool or Landing Pad. It's ideal setting is off of a dock or as an outboard docking platform on a yacht or seagoing vessel. Park water toys with ease with the Aquaglide Docking Station.

Includes:
- Docking Station
- 9 Vario Lock straps
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Open water swimming.


Warranty:
3-year limited against any manufacturing defects.


Material:
0.80 mm / 15cm dropstitch

Construction:
Welded Dropstitch

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

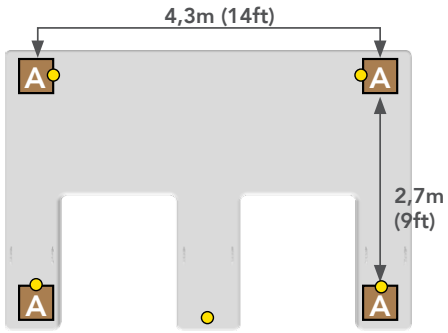

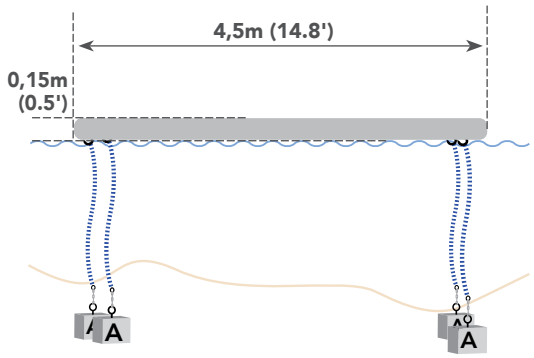

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
3 | 3	272 kg (600 lbs.)	1,21m (4ft)	3m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	5	9	9 VARIO LOCK	MAIN [1] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

BEAVER BURROW

Item Number: 585226172
SKU: 0790628048484
Dimensions: L 10.0' x W 5.9' x H 3.4'
(L 3,05m x W 1,80m x H 1,05m)

Box Dimensions:
L 29.5" x W 21.7" H 12.6", 70.5 lbs.
(L 75cm x W 55cm x H 32cm, 32,0 kg)



Benny the Beaver is clever and industrious, always using ingenuity to find the right path through a challenge.

Beaver Burrow is a unique balance log with integrated tunnel feature. The challenge is to stay balanced while crossing this slippery beam on hands and knees. Connects to AG Splash Squad configuration on two ends using the integrated D-Ring Interlock system.

Includes:
- Beaver Burrow
- Pressure gauge
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing, crawling and climbing.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Double-I-Beam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

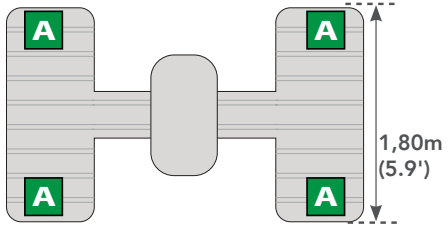

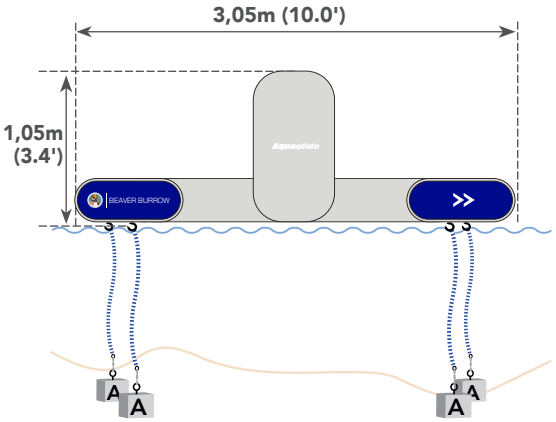

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 3	195 kg (429 lbs.)	1,33m (4.3ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

CAMEL HUMPS

Item Number: 585226173
SKU: 0790628048491
Dimensions: L 10.0' x W 5.9' x H 3.6'
(L 3,05m x W 1,80m x H 1,09m)

Box Dimensions:
L 29.5" x W 21.7" H 11.8", 66.1 lbs.
(L 75cm x W 55cm x H 30cm, 30,0 kg)



When facing a formidable obstacle, Carlos the Camel always uses patience to remain calm and stay focused on the task at hand.

The Camel Humps present a signicant trial that will take endurance and focus to cross! Small slippery stepping stone adds to the challenge on this double gap-hopping feature.

Includes:
- Camel Humps
- Pressure gauge
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Balancing and walking


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Double-I-Beam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

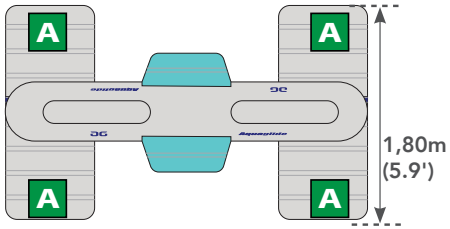

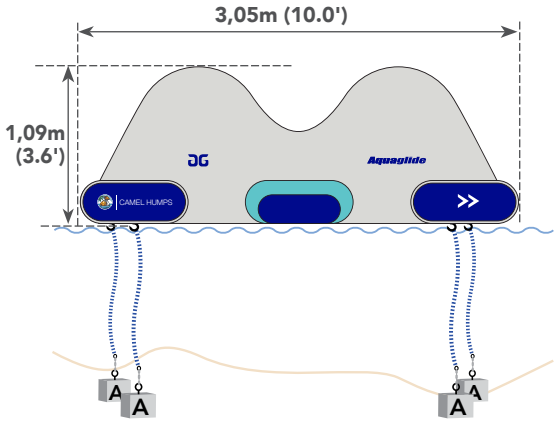

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 3	195 kg (429 lbs.)	1,35m (4.4ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

CONDOR PLUNGE

Item Number: 585226174
SKU: 0790628048507
Dimensions: L 12.5' x W 5.9' x H 9.5'
(L 3,80m x W 1,80m x H 2,89m)

Box Dimensions:
L 45.3" x W 29.5" H 11.8", 121.3 lbs.
(L 115cm x W 75cm x H 30cm, 55,0 kg)

With optional jump platforms or exciting zero-entry slide the Condor Plunge offers maximum fun and excitement!

Cody the Condor is one of the boldest Splash Squad members, inspiring his friends to aim high and enjoy the thrill of the plunge.



Includes:
- Condor Plunge
- Repair kit
- Pressure gauge

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, jumping and sliding


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Double-I-Beam and tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

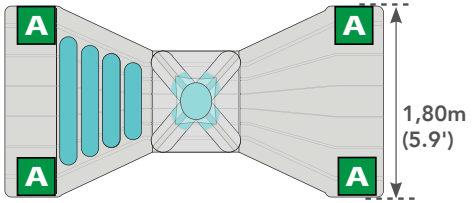

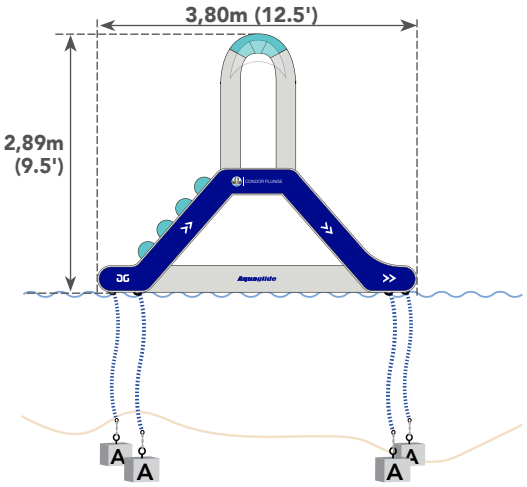

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 3	195 kg (429 lbs.)	1,50m (4.9ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5	MAIN [1] 1.2 psi (0,083 bar) UPPER [2] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

FOX HOLLOW



Item Number: 585226175
SKU: 0790628048514
Dimensions: L 10.0' x W 5.9' x H 3.9'
(L 3,05m x W 1,80m x H 1,20m)

Box Dimensions:
L 45.3" x W 29.5" H 9.8", 105.8 lbs.
(L 115cm x W 75cm x H 25cm, 48,0 kg)

Fiona is a clever fox, always using a light touch and cunning ways to explore the forest.

Like her, kids will need to be clever and deft to navigate through this tricky tunnel and reach the other side.

Includes:
- Fox Hollow
- Repair kit
- Pressure gauge

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Walking, crawling or sliding.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Double-I-Beam and tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

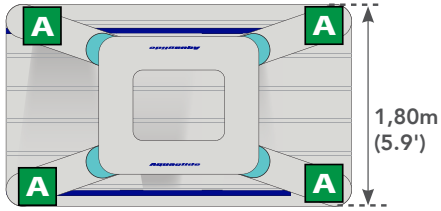

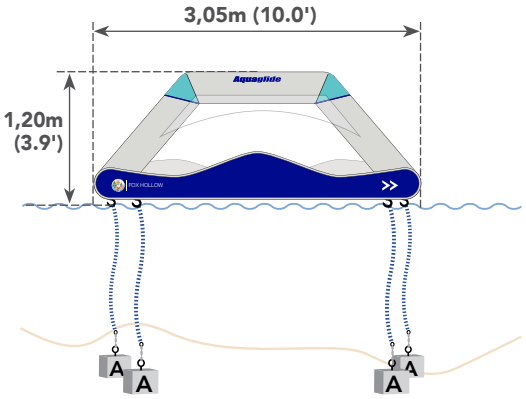


USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 3	195 kg (429 lbs.)	1,40m (4.6ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2 psi (0,083 bar) UPPER [2] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

LIZARD LANE

Item Number: 585226176
SKU: 0790628048521
Dimensions: L 10.0' x W 5.9' x H 1.0'
(L 3,05m x W 1,80m x H 0,30m)

Box Dimensions:
L 29.5" x W 21.7" H 9.8", 50.7 lbs.
(L 75cm x W 55cm x H 25cm, 23.0 kg)

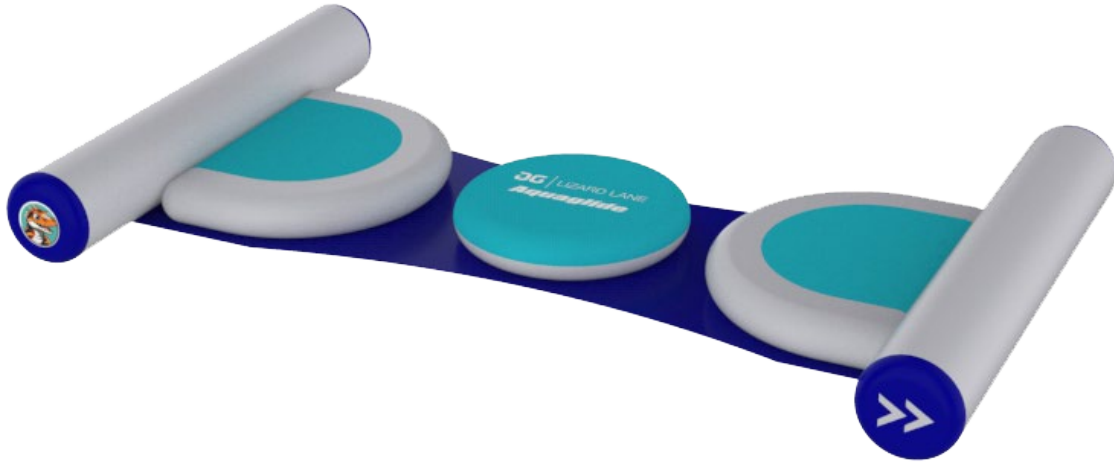

Lizard Lane is a stepping stone balance feature that encourages speed, agility and nurtures a taste for adventure.

Kids will need to move like Lizzy the Lizard to wiggle through this exciting feature.

Includes:
- Lizard Lane
- Repair kit
- Pressure gauge

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Walking or running.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Dropstitch and tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

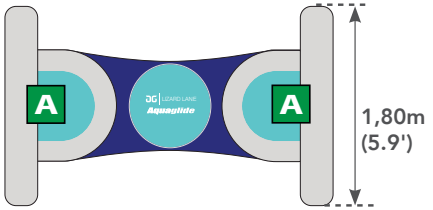

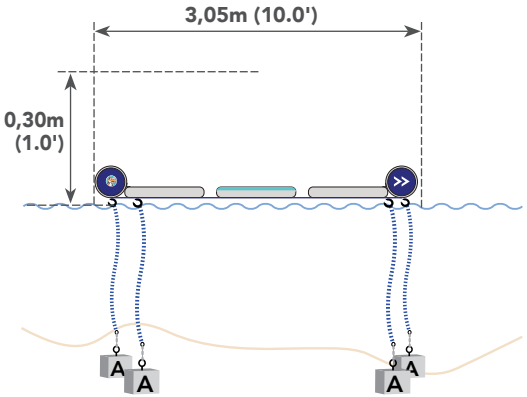

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 2	130 kg (286 lbs.)	0,95m (3.1ft)	3,0m (10ft)	200 kg (500 lbs.)	100 kg (250 lbs.)	2	2	2	5 | 5	TUBES [1] 2.0psi (0,138 bar) STEPS [2] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

PELICAN PERCH


Item Number: 585225120
SKU: 0790628047302
Dimensions: L 6.6' x W 5.1' x H 1.7'
(L 2,0m x W 1,55m x H 0,53m)

Box Dimensions:
L 29.5" x W 21.7" H 9.8", 62.8 lbs.
(L 75cm x W 55cm x H 25cm, 28,5 kg)



Percy the Pelican is thoughtful and observant, always making sure everyone is included.

Consequently, in many ways Pelican Perch is the glue that holds each Splash Squad grouping together. This low-profile platform offers easy, stepped re-boarding from 2 sides while providing a pathway to walk between primary features.

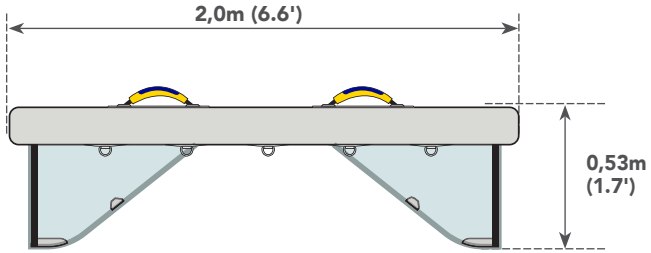

Includes:
- Pelican Perch
- Repair kit
- 10 Vario Lock straps

Not Included:
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump

Best For:
Boarding

Warranty:
Limited 3-year Warranty

Material:
15cm MSL DS NON-P PVC/ 31 oz Cx3

Construction:
Dropstitch

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT		STRAPS	D-RINGS	WORKING PRESSURE
0 | 1	65 kg (143 lbs.)	0,88m (2.9ft)	3,0m (10ft)	NO ANCHORING REQUIRED	10	5 | 5	MAIN [2] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

PELICAN PERCH XL


Item Number: 585225121
SKU: 0790628047319
Dimensions: L 6.6' x W 6.6' x H 1.7'
(L 2,0m x W 2,0m x H 0,53m)

Box Dimensions:
L 29.5" x W 21.7" H 9.8", 59.5 lbs.
(L 75cm x W 55cm x H 25cm, 27,0 kg)



Pelican Perch XL is mission critical to Splash Squad groupings. This low-prole platform offers easy, stepped boarding on 1 side and connections on up to 3 sides, providing convenient pathways between primary features.

As the primary entry point for each Splash Squad track, Pelican Perch XL helps ensure that everyone starts the mission properly.

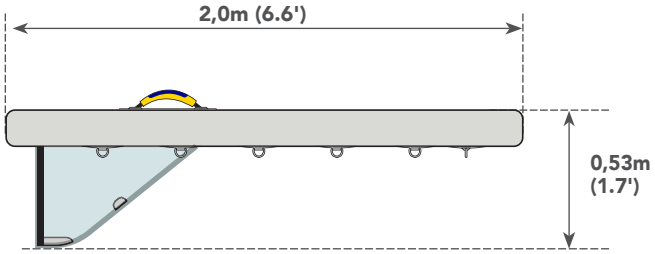

Includes:
- Pelican Perch XL
- Repair kit
- 15 Vario Lock straps

Not Included:
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump

Best For:
Boarding

Warranty:
Limited 3-year Warranty

Material:
15cm MSL DS NON-P PVC/ 31 oz Cx3

Construction:
Dropstitch

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT		ANCHOR RINGS	STRAPS	D-RINGS	WORKING PRESSURE
0 | 2	130 kg (286 lbs.)	0,88m (2.9ft)	3,0m (10ft)	NO ANCHORING REQUIRED	2	15	5 | 5 | 5	MAIN [2] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

PENGUIN PLUNGE

Item Number: 585226177
SKU: 0790628048538
Dimensions: L 10.0' x W 5.9' x H 3.9'
(L 3,05m x W 1,80m x H 1,20m)

Box Dimensions:
L 45.3" x W 29.5" H 8.7", 88.2 lbs.
(L 115cm x W 75cm x H 22cm, 40,0 kg)



Clearly built with Pippa the Penguin in mind, Penguin Plunge is the perfect sliding feature to finish a Splash Squad mission with fun and style.

Pippa is cheerful and enthusiastic - always up to join her friends for a splashy finish!

Includes:
- Penguin Plunge
- Repair kit
- Pressure gauge

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing, jumping and sliding


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Double-I-Beam and tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

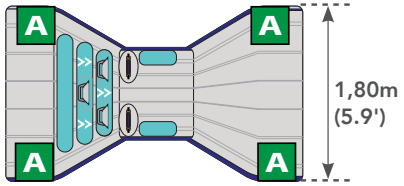

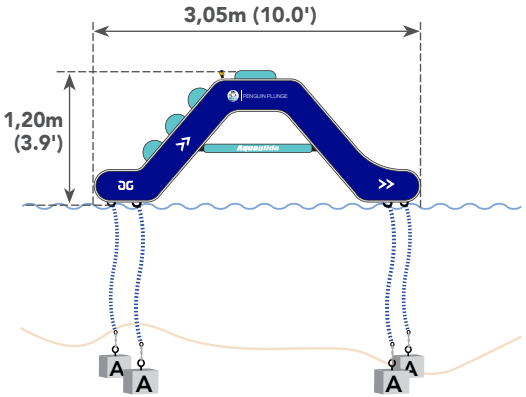

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 3	195 kg (429 lbs.)	1,40m (4.6ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5	MAIN [1] 1.2 psi (0,083 bar

© Copyright 2025 Aquaglide | Proprietary + Confidential

PUMA POUNCE

Item Number: 585226178
SKU: 0790628048545
Dimensions: L 10.0' x W 5.9' x H 3.9'
(L 3,05m x W 1,80m x H 1,20m)

Box Dimensions:
L 29.5" x W 21.7" H 11.8", 57.3 lbs.
(L 75cm x W 55cm x H 30cm, 26,0 kg)



It takes athleticism, grace and a good share of boldness to tackle this puma-sized gap jump.

All these are attributes modeled by Penny the Puma, who supports and encourages her friends to do the same.

Includes:
- Puma Pounce
- Repair kit
- Pressure gauge

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Walking, leaping and jumping.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Dropstitch and tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

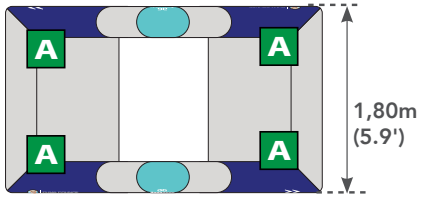

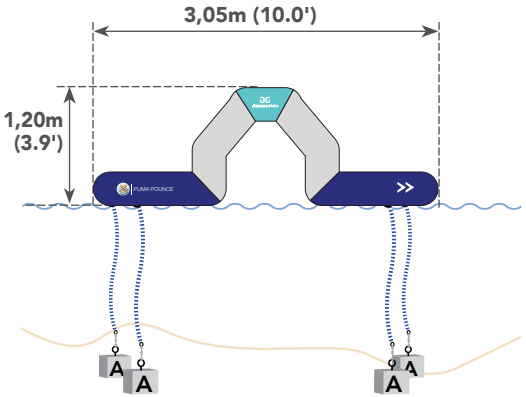

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 3	195 kg (429 lbs.)	0,95m (3.1ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	TUBE [1] 2.0 psi (0138 bar) STEP [2] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

PUPPY PLUNGE

Item Number: 585226179
SKU: 0790628048552
Dimensions: L 6.1' x W 3.6' x H 2.2'
(L 1,85m x W 1,10m x H 0,66m)

Box Dimensions:
L 29.5" x W 21.7" H 7.9", 52.9 lbs.
(L 75cm x W 55cm x H 20cm, 24,0 kg)

Pip loves the water, but prefers not to get in over his head. Designed to sit just at the pool edge, Puppy Plunge presents the perfect gentle-sliding transition for Pip and others who are new to the water.

Puppy Plunge can also be used as a splashy finish for a floating track. This item is limited to kids aged 4 - 10 years old.



Includes:
- Puppy Plunge
- Repair kit
- Pressure gauge

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing and sliding


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Double I-Beam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

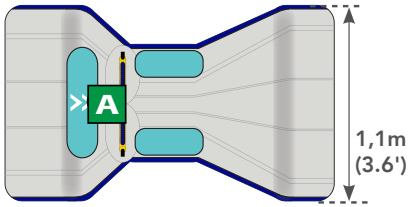

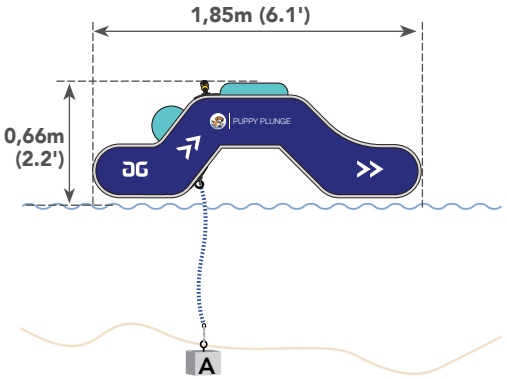

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 1	65 kg (143 lbs.)	1,13m (3.7ft)	3,0m (10ft)	100 kg (250 lbs.)	100 kg (250 lbs.)	1	2	1	0	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

RABBIT RUN

Item Number: 585226180
SKU: 0790628048569
Dimensions: L 10.0' x W 5.9' x H 1.7'
(L 3,05m x W 1,80m x H 0,52m)

Box Dimensions:
L 29.5" x W 21.7" H 7.9", 52.9 lbs.
(L 75cm x W 55cm x H 20cm, 24,0 kg)



Ruby the Rabbit is determined and resourceful, always hopping ahead to scout out safe routes for the Splash Squad.

Patterned after Ruby's style, Rabbit Run combines bounce pads and traction patches to create a unique hop-bridge, a playful obstacle for kids to enjoy.

Includes:
- Rabbit Run
- Repair kit
- Pressure gauge

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Walking, running and jumping.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Double I-Beam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

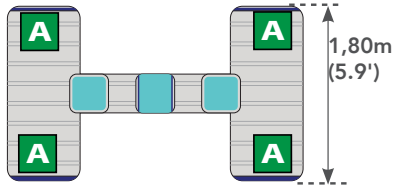

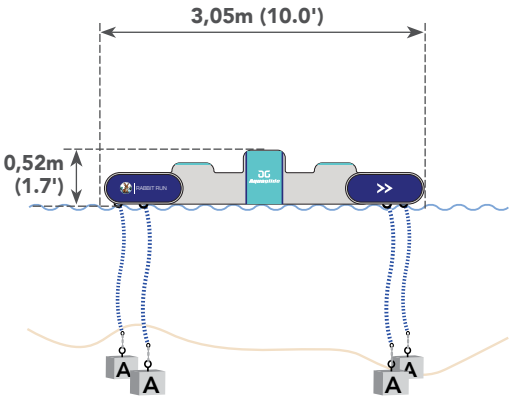

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 3	195 kg (429 lbs.)	1,06m (3.5ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SQUIRREL SCRAMBLE

Item Number: 585226181
SKU: 0790628048576
Dimensions: L 10.0' x W 5.9' x H 1.0'
(L 3,05m x W 1,80m x H 0,30m)

Box Dimensions:
L 29.5" x W 21.7" H 7.9", 50.7 lbs.
(L 75cm x W 55cm x H 20cm, 23,0 kg)



Sammy the Squirrel is young, nimble and loves to challenge himself!

Squirrel Scramble presents a fun balance log challenge for Sammy and the rest of his Splash Squad friends to skitter across.

Includes:
- Squirrel Scramble
- Repair kit
- Pressure gauge

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Walking and running.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Double I-Beam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

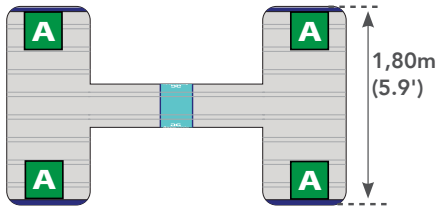

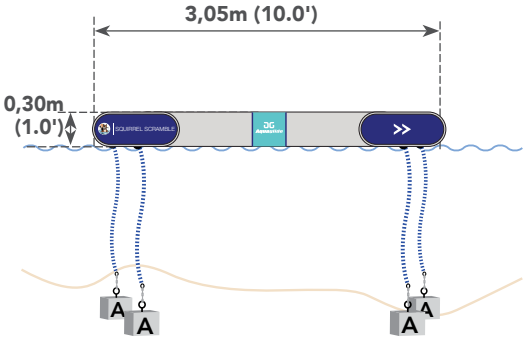

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 3	195 kg (429 lbs.)	0,95m (3.1ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

WOLF RIDGE

Item Number: 585225127
SKU: 0790628048583
Dimensions: L 10.0' x W 5.9' x H 2.8'
(L 3,05m x W 1,80m x H 0,85m)

Box Dimensions:
L 29.5" x W 21.7" H 9.8", 60.8 lbs.
(L 75cm x W 55cm x H 25cm, 27,6 kg)



Wolf Ridge is a slippery and precarious challenge to cross. Strong, loyal and protective, Wally the Wolf grew up in similarly challenging mountain terrain.

Wally uses a team approach to support and motivate his friends to cross this, and other Splash Squad obstacles and have fun while doing it!

Includes:
- Wolf Ridge
- Repair kit
- Pressure gauge

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Climbing and sliding.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm NON-P PVC/ 31 oz Cx3

Construction:
Double I-Beam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

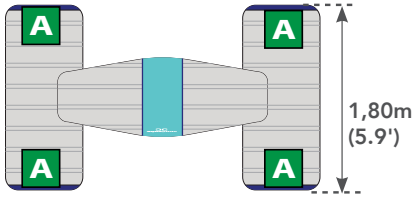

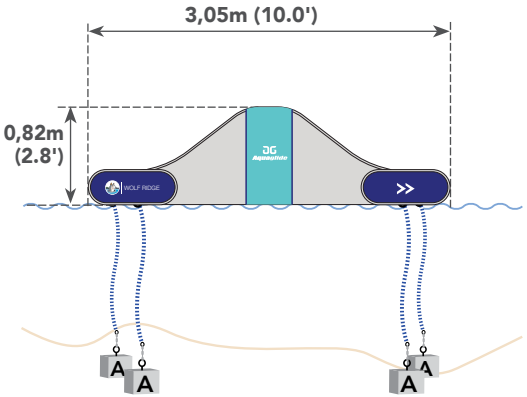

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
0 | 3	195 kg (429 lbs.)	1,23m (4.0ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

AQUAPARK MOORING

We offer two mooring kit options - the Vertical Mooring Line and the Complete Mooring Line. Both of these products include the necessary snap hook, buoy, quick link, and braided bungie necessary to set up a mooring line. The Adjustable Complete Mooring Line Kit also comes with segmented rope sections up to 19 feet.

The Vertical Mooring is a mooring line set for a water depth of 4 ft (1.2m). Its best value is when installing aquapark mooring fields with tens or hundreds of moorings.

For any water depths over 4 ft (1.2m), rope segments can be added to extend the mooring length (requires purchase of additional rope segments, sold singly, or in sets of 10pc).

Vertical Mooring Line

One complete heavy duty mooring line for 4 foot (1,22m) water depth. 3000lb (1360kg) break strength, all components #316 Stainless steel. Easily add optional rope extensions to reach desired water depth - no knots required! Includes 1pc heavy duty bungie, 1pc #316 SS quick link, 1pc 1-foot mooring rope, 1pc line float and 1pc #316 SS snap hook.

Item number: 585321248
SKU: 0790628045391



5-Foot Mooring Rope

5 -foot (152cm) mooring rope extension. 4000lb PE rope eye spliced at both ends for easy attachment. Set of 10pc.

Item number: 585321251
SKU: 0790628045421



1-Foot Mooring Rope

1 foot (31cm) mooring rope extension. 4000lb PE rope eye spliced at both ends for easy attachment. Set of 10pc.

Item number: 585321250
SKU: 0790628045414



Complete Mooring Line, 19ft (5,79m)

One complete heavy duty mooring line for up to 19 foot (5,79m) water depth. Easily adjusts to required depth - no knots required! 3000lb (1360kg) break strength, all components #316 Stainless steel. Includes 1 heavy duty bungies, 1pc #316 SS quick link, 6pc 1-foot mooring ropes, 2pc 5-foot mooring ropes 1pc line float and 1pc #316 SS snap hook.

Item number: 585321252
SKU: 0790628045438



Horizontal Mooring Line, Pair

Two complete heavy duty mooring lines for horizontal (pool) mooring. 10 foot (3,04m) length. 3000lb (1360kg)break strength, all components #316 Stainless steel. Easily add optional rope extensions if necessary - no knots required! Includes 2pc heavy duty bungies, 2pc #316 SS quick link, 2pc 1-foot mooring ropes, 2pc line floats and 2pc #316 SS snap hooks.

Item number: 585321249
SKU: 0790628045407



PUMPS

Extension Hose for Aquapark Pump - 33ft (10,0m) 40mm diameter hose extension for the Aquapark Pump (110v or 230v) 7.3. Allows commercial park operators or residential customers to easily top off aquapark items while keeping A/C electrical pumps away from the water. Can also be used with Hurricane (110v or 230v) 3.6 pumps. Includes threaded attachments at both ends, HR and Boston fittings.

Item number: 585321258
SKU: 0790628045490



RECHARGEABLE PUMP 120v 25 - The new Park Rechargeable Pump is a powerful, remote pump that is ideal for topping off floating aquatic play structures and other inflatables. Four high-pressure pump cylinders are powered by a formidable 10,000 mAh Lithium-ion battery bank for excellent power, range and runtime. Air flow 200L/min up to 25psi. Includes charging cord, padded storage bag with shoulder strap and 2 HR fittings.

Item number: 585325101
SKU: 0790628047036



Hurricane 110v 3.6 Pump - Quickly inflates kayaks, Lakefront aquaparks and small commercial parks. Maximum 3.6psi (0,25 bar). Air flow 70cfm (2000L/min). Includes 4ft (1,25m) of 40mm hose with HR, Boston and Stem fittings.

Item number: 585318120
SKU: 0790628040556



Aquapark 110v 7.3 Pump - High capacity pump for commercial aquapark. Twin motors provide additional capacity and max pressure of 7.3psi, ideal for dropstitch connectors. Air flow 1200L/min (stage 1)and 2000L/min (stage 2). Includes 4ft (1,25m) of 40mm hose with HR and Boston fittings.

Item number: 585213101
SKU: 0790628040600



SIGNATURE AQUAPARK FEATURE



EL JEFE TR
L 50.6' x W 20' x H 19.8'
(L 15,4m x W 6,1m x H 6,0m)



LA JEFA TR
L 76.6' x W 20' x H 19.8'
(L 23,4m x W 6,1m x H 6,0m)



MEGA BLAST
L 33.7' x W 12.5' x H 8.9'
(L 10,3m x W 3,8m x H 2,7m)




THOR
L 30' x W 15' x H 12.7'
(L 9,1m x W 4,6m x H 3,9m)




ANVIL
L 15' x W 15' x H 10'
(L 4,6m x W 4,57m x H 3,05m)



HAMMER
L 14.9' x W 13.1' x H 7.2'
(L 4,55m x W 4,0m x H 2,2m)



FREEFALL SUPREME TR
L 28.2' x W 12.4' x H 16.6'
(L 8.6m x W 3,8m x H 5,1m)



SUMMIT EXPRESS TR
L 31.6' x W 9' x H 16.4'
(L 9,63m x W 2,7m x H 5m)



FREEFALL EXTREME
L 21.1' x W 9' x H 9.6'
(L 6,75m x W 2,7m x H 3m)

TRACK FEATURES



KNOCKOUT 20
L 20' x W 10' x H 10.6'
(L 6,1m x W 3,1m x H 3,2m)



PARKWAY 30
L 30' x W 6.5' x H 3.5'
(L 9,1m x W 2m x H 1,1m)



PARKWAY 20
L 20' x W 6.5' x H 3.5'
(L 6,1m x W 2m x H 1,1m)



PARKWAY 10
L 10' x W 6.5' x H 2.3'
(L 3m x W 2m x H 0,7m)




DOUBLE ICECAP 20
L 10' x W 10.6' x H 3.1'
(L 6,1m x W 3,2m x H 1,0m)



MONKEY DOME 20
L 20' x W 10' x H 10.9'
(L 6,1m x W 3,1m x H 3,3m)




NEPTUNE 20
L 20' x W 8.2' x H 9.8'
(L 6,1m x W 2,5m x H 3m)



BLOCKADE 20
L 20' x W 6.5' x H 5'
(L 6,1m x W 2m x H 1,5m)



FIGURE 8 20
L 10' x W 10.6' x H 1.6'
(L 6,1m x W 3,2m x H 0,5m)



PATHFINDER 20
L 20.3' x W 7' x H 1.6'
(L 6,2m x W 2,1m x H 0,5m)



ROCK HOPPER 10
L 10' x W 6.5' x H 3.9'
(L 3,1m x W 2,0m x H 1,2m)



OVERPASS 10
L 10' x W 7.4' x H 5.5'
(L 3,04m x W 2,25m x H 1,67m)

TRACK FEATURES



HATCHWAY 10
L 10.0' x W 6.5' x H 5.3'
(L 3,05m x W 1,98m x H 1,60m)



HATCHWAY 20
L 20' x W 6'6" x H 5'7"
(L 6,1m x W 1,98m x H 1,7m)



RIDGEWAY 10
L 10' x W 8' x H 4'11"
(L 3,05m x W 2,44m x H 1,5m)



RIDGEWAY 20
L 20' x W 8' x H 6'0"
(L 6,1m x W 2,44m x H 1,83m)



I-HOP 20
L 20' x W 10' x H 1.7'
(L 6,1m x W 3m x H 0,5m)



FOXTROT 20
L 20' x W 6.5' x H 1.5'
(L 6,1m x W 2m x H 0,5m)



WALK ON WATER
L 20' x W 5' x H 0.3'
(L 6m x W 1,5m x H 0,1m)

TRACK CORNERS



QUARTERBACK
L 15.2' x W 9' x H 4.7'
(L 4,6m x W 2,7m x H 1,4m)



LUGEBACK
L 15.2' x W 7.1' x H 4.1'
(L 4,6m x W 2,2m x H 1,3m)



PATHBACK
L 12.7' x W 12.4' x H 1.6'
(L 3,9m x W 3,8m x H 0,5m)



BENDBACK
L 15' x W 7' x H 2.5'
(L 4,6m x W 2,2m x 0,8m)



KICKBACK
L 15' x W 7' x H 2.5'
(L 4,6m x W 2,2m x H 0,8m)

BOARDING FEATURES



SPEEDWAY 20
L 20' x W 5' x H 0.4'
(L 6m x W 1,5m x H 0,1m)



SPEEDWAY 10
L 10' x W 5' x H 0.4'
(L 3m x W 1,5m x H 0,1m)



SPLASHMAT 18
L 18' x W 5' x H 0.4'
(L 5,5m x W 1,5m x H 0,1m)



SWIMSTEP XL
L 5' x W 6.5' x H 0.4'
(L 1,5m x W 2,0m x H 0,1m)



SWIMSTEP 5X5
L 5' x W 5' H 0.4'
(L 1,5m x W 1,5m x H 0,1m)



SWIMSTAIRS XL
L 6.5' x W 5' H 1.9'
(L 2,0m x W 1,5m x H 0,59m)

ACCESSORIES



PLUNGE SLIDE
L 6.6' x W 5.4' x H 4.4'
(L 2m x W 1,7m x H 1,4m)

BLAST BAG
L 12' x W 5.4' x H 3'
(L 3,7m x W 1,7m x H 1m)

EL JEFE CLIMBING WALL
L 4.1' x W 5' x H 12'
(L 1,3m x W 1,4m x H 3,7m)

ESCALADE SUMMIT
L 4.1' x W 5' x H 12'
(L 1,3m x W 1,4m x H 3,7m)

SWIMSTEP
L 5' x W 3.5' x H 0.7'
(L 1,5m x W 1,1m x H 0,2m)

SPLASH SQUAD

BEAVER BURROW
L 10.0' x W 5.9' x H 3.4'
(L 3.1m x W 1.8m x H 1.1m)

CAMEL HUMPS
L 10.0' x W 5.9' x H 3.6'
(L 3.1m x W 1.8m x H 1.1m)

CONDOR PLUNGE
L 12.5' x W 5.9' x H 9.5'
(L 3.8m x W 1.8m x H 2.9m)

FOX HOLLOW
L 10.0' x W 5.9' x H 3.9'
(L 3.1m x W 1.8m x H 1.2m)

LIZARD LANE
L 10.0' x W 5.9' x H 1.0'
(L 3.1m x W 1.8m x H 0.3m)

PELICAN PERCH
L 6.6' x W 5.1' x H 1.7'
(L 2.0m x W 1.6m x H 0.5m)

PELICAN PERCH XL
L 6.6' x W 6.6' x H 1.7'
(L 2.0m x W 2.0m x H 0.5m)

PENGUIN PLUNGE
L 10.0' x W 5.9' x H 3.9'
(L 3.1m x W 1.8m x H 1.2m)

PUMA POUNCE
L 10.0' x W 5.9' x H 3.4'
(L 3.1m x W 1.8m x H 1.1m)

PUPPY PLUNGE
L 6.1' x W 3.6' x H 2.2'
(L 1.9m x W 1.1m x H 0.7m)

RABBIT RUN
L 10.0' x W 5.9' x H 1.7'
(L 3.1m x W 1.8m x H 0.5m)

SIGNATURE AQUAPARK FEATURE



JUNGLE JOE 2 TR
L 21.3' x W 18' x H 12'
(L 6,5m x W 5,5m x H 3,8m)



JUNGLE JIM
L 10.2' x W 10.2' x H 6.5'
(L 3.11m x W 3,1m x H 1,99m)



HELIX
L 13.0' x W 8.2' x H 5.0'
(L 9.2m x W 2.5m x H 1.5m)



LOG JAM
L 30.0' x W 8.2' x H 5.5'
(L 9.2m x W 2.5m x H 1.7m)



KING OF THE MOUNTAIN
L 14' x W 9' x H 6.6'
(L 4m x W 2,7m x H 2m)



FREEFALL 6
L 13' x W 8' x H 5.8'
(L 4,1m x W 2,4m x H 1,77m)



ZULU
L 10.8' x W 6.5' x H 5.1'
(L 3,3m x W 2m x H 1,54m)



THUNDERDOME
L 15' x W 15' x H 7.5'
(L 4,5m x W 4,5m x H 2,3m)



KAOS
L 25' x W 25' x H 4'
(L 7,6m x W 7,6m x H 1,2m)

TRACK FEATURES



SPRINGWAY 10
L 10' x W 8.6' x H 5.2'
(L 3,1m x W 2,6m x H 1,6m)



SPRINGWAY 20
L 20' x W 8.2' x H 5.2'
(L 6,1m x W 2,5m x H 1,6m)



SPRINGWAY 30
L 30' x W 8.2' x H 5.2'
(L 9,1m x W 2,5m x H 1,6m)



I-BEAM 20
L 20' x W 10' x H 1.6'
(L 6,1m x W 3m x H 0,5m)



ARETE 20
L 20' x W 8.1' x H 6'
(L 6,1m x W 2,5m x H 1,8m)



ARETE 10
L 10' x W 8.1' x H 6'
(L 3m x W 2,5m x H 1,8m)



VISTA 10
L 10' x W 6.5' x H 5'
(L 3m x W 2m x H 1,5m)



SUBWAY 10
L 10' x W 8' x H 5'
(L 3m x W 2,5m x H 1,5m)



SIERRA 10
L 10' x W 8.7' x H 3.8'
(L 3m x W 2,64m x H 1,17m)



BARRICADE 10
L 10' x W 6.5' x H 5'
(L 3m x W 2m x H 1,5m)



DELTA 10
L 10' x W 6.75' x H 1.5'
(L 3,1m x W 2,1m x H 0,5m)

JUNCTIONS



UNIVERSAL ARCHWAY
L 12.6' x W 12.6' x H 8.2'
(L 3,9m x W 3,9m x H 2,5m)



UNIVERSAL LIFEGUARD STATION
L 12.6' x W 12.6' x H 14.9'
(L 3,9m x W 3,9m x H 4,5m)



UNIVERSAL THUNDERDOME
L 12.5' x W 12.5' x H 4.9'
(L 3,8m x W 3,8m x H 1,5m)



UNIVERSAL MONSOON SPRAY STATION
L 12.7' x W 12.7' x H 9'
(L 3,8m x W 3,8m x H 2,8m)



UNIVERSAL ICECAP
L 12.6' x W 12.6' x H 3.1'
(L 3,9m x W 3,9m x H 1,0m)



UNIVERSAL KEYHOLE
L 12.6' x W 12.6' x H 5.6'
(L 3,9m x W 3,9m x H 1,7m)



UNIVERSAL PAVILION
L 12.6' x W 12.6' x H 12.4'
(L 3,9m x W 3,9m x H 3,8m)



UNIVERSAL CONNECTION
L 12.6' x W 12.6' x H 1'
(L 3,9m x W 3,9m x H 0,3m)



LANDING PAD 4M
L 13' x W 13' x H 0.49'
(L 4m x W 4m x H 0,15m)



TANGO
L 6.6' x W 6.6' x H 1.5'
(L 2m x W 2m x H 0,5m)

TRAMPOLINE & BOUNCERS



SUPERTRAMP 23
L 22.5' x W 22.5' x H 3.3'
(L 7m x W 7m x H 1m)



SUPERTRAMP 17
L 17' x W 17' x H 3'
(L 5,2m x W 5,2m x H 0,9m)



REBOUND 20 AQUAPARK
L 20' x W 20' x H 3.2'
(L 6m x W 6m x H 1m)



REBOUND 20
L 20' x W 20' x H 3.2'
(L 6m x W 6m x H 1m)

ROCKERS



ROCKIT
L 13' x W 13' x H 5.5'
(L 4m x W 4m x H 1,7m)



ROCKIT JR
L 9.5' x W 9.5' x H 3.6'
(L 3m x W 3m x H 1,1m)



AXIS ROCKER
L 12' x W 7.7' x H 5'
(L 3,7m x W 2,4m x H 1,6m)

SPLASH SQUAD



SQUIRREL SCRAMBLE
L 10.0' x W 5.9' x H 1.0'
(L 3.1m x W 1.8m x H 0.3m)



WOLF RIDGE
L 10.0' x W 5.9' x H 2.8'
(L 3.1m x W 1.8m x H 0.9m)

LOUNGES



O.G. LOUNGE
L 10' x W 10' x H 7.5'
(L 3,05m x W 3,05m x H 2,3m)

OHANA LOUNGE
L 10' x W 10' x H 7.5'
(L 3,05m x W 3,05m x H 2,3m)

LAZY LOUNGE
L 8.9' x W 10.1' x H 1.5'
(L 2,7m x W 3,1m x H 0,5m)

SOLARIUM
L 10' x W 6.6' x H 0.5'
(L 3,05m x W 2,0m x H 0,15m)

YACHT

OCEAN POOL 4M x M
L 13' x W 13' x H 8'
(L 4m x W 4m x H 2,4m)

OCEAN POOL 5M X 6M
L 20' x W 16.6' x H 8'
(L 6,1m x W 5,1m x H 2,4m)

DOCKING STATION
L 9.8' x W 14.7' x H 0.3'
(L 3m x W 4,5m x H 0,1m)

LOKI CORNER

Aquaglide

DISCONTINUED

Item Number: 585221101
SKU: 0790628042376
Dimensions: L 27.5' x W 15.1' x H 10.6'
(L 838cm x W 462cm x H 323cm)

Box Dimensions:
L 120cm x W 106cm x H 82cm, 274 kg



An alternative to the standard single-entry Loki, the dual entry Loki Corner offers the same exciting warped luge slide plus three novice ladder walls, one large mini-drop, four advanced climbing lines, and an expansive cave hangout area. The dual entry format of the Loki Corner connects at two boarding terminals using Vario straps. Designed to fit perfectly into the corner of Ring Series Aquaparks, the Loki Corner also makes an excellent standalone feature for up to 10 users at once.

Includes:
- Loki Corner
- Repair Kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:
- Hurricane 110v 3.6 Pump
- Rechargeable 120v 25 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Slipping, sliding, and lounging.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

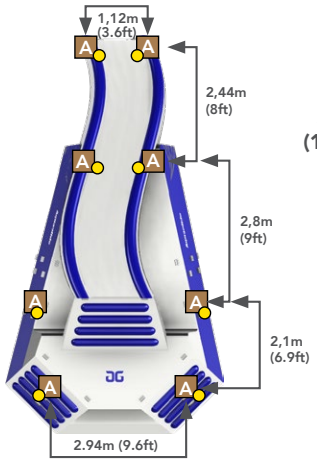

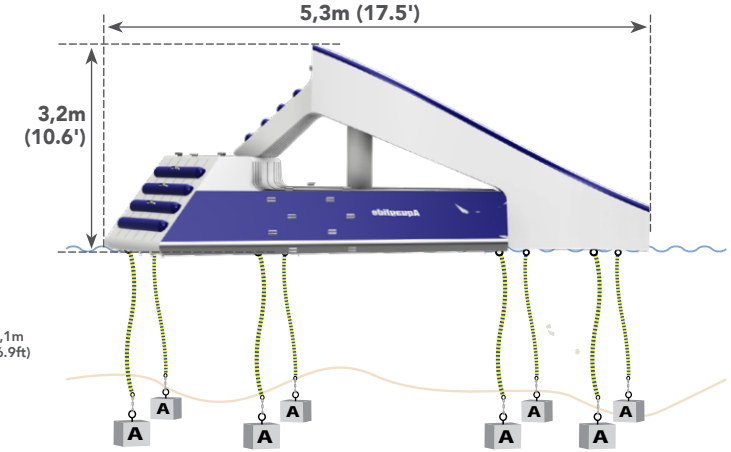

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
10 | 10	907 kg (2000 lbs.)	2,53m (8.3ft)	3,0m (10ft)	2000 kg (4000 lbs.)	250 kg (500 lbs.)	8	8	8	5	Main [1] 0.7psi (0,050bar), Slide [2] 1.5psi (0,103bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

CATAPULT W/ TRAPEZE

Aquaglide

DISCONTINUED

Item Number: 585220113
SKU: 0790628043380
Dimensions: L 16' x W 13' x H 15'
(L 4,8m x W 4m x H 4,6m)

Box Dimensions:
L 41" x W 31" x H 23", 200 lbs. 1pc.
(L 103cm x W 78cm x H 59cm, 91 kg)



The Catapult sends users swinging or launching themselves over the water. The Catapult presents a more approachable trapeze-style swinging experience than its larger counterpart, the Skyrocket. An integrated swim platform and molded climbing steps on the inside and outside make it easy to board from the water and climb onto the swing position. Use the Catapult as a standalone feature or connect to any Aquaglide Aquapark configuration using the D-Ring Interloc system.

Includes:
- Catapult
- 5 Vario Lock straps
- Trapeze
- Swing seat
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Swinging.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Tubular - welded 3 layer seam - integrated DS w/ welded seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

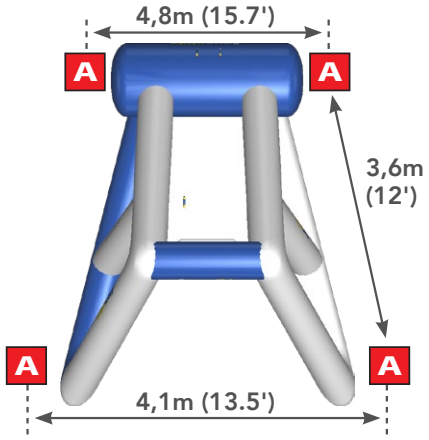

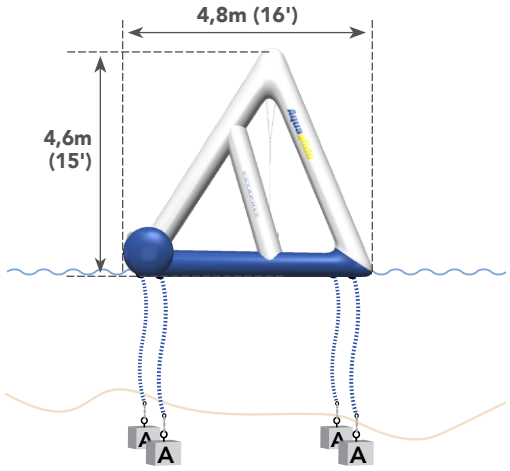

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
1 | 1	363 kg (800 lbs.)	2,44m (8ft)	4,5m (15ft)	2000 kg (4000 lbs.)	500 kg (1000 lbs.)	4	4	4	5 | 5 | 5	MAIN [1] 1.74psi (0,119 bar), [2] 1.74psi (0,119 bar), [3] 5.0psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SKYROCKET W/ TRAPEZE

Aquaglide

DISCONTINUED

Item Number: 585220112
SKU: 0790628043373
Dimensions: L 26.3' x W 26.3' x H 26.3'
(L 8m x W 8m x H 8m)

Box Dimensions:
L 48" x W 40" x H 33", 452 lbs. 1 pc.
(L 120cm x W 100cm x H 82cm, 205kg)



The Skyrocket provides an exciting way for users to swing or launch themselves over the water. With an integrated swim platform and lounging area inside, the Skyrocket is a massive swing that launches users into a new dimension of water play for hours of high-flying fun. Climbing handles on the inside and outside make it easy to board from the water and climb onto the swing position. The Skyrocket works as a standalone feature or with any Aquaglide Aquapark configuration connected using the D-Ring Interloc system.

Includes:
- Skyrocket
- 5 Vario Lock straps
- Trapeze
- Swing seat
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Swinging.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

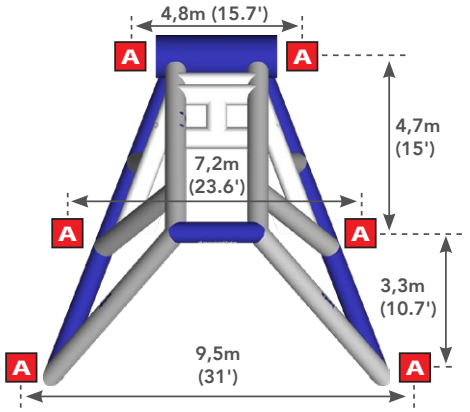

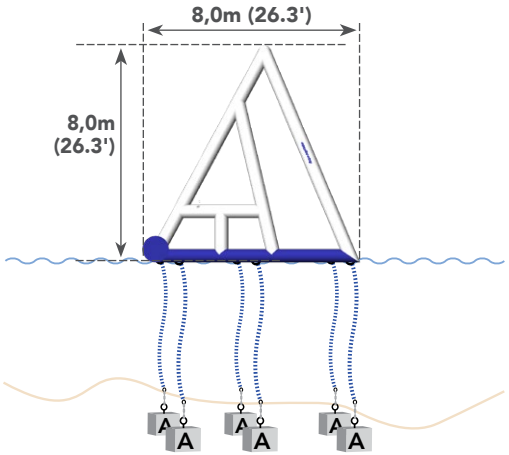

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
SWING: 1 | 1 LOUNGING: 5 | 5	726 kg (1600 lbs.) SWING: 272 KG (600 lbs.)	3,66m (12 ft)	4,5m (15 ft)	3000 kg (6000 lbs.)	500 kg (1000 lbs.)	6	6	6	5	5 VARIO LOCK CINCH STRAPS	MAIN [1] 1.5 psi (0,103 bar) TUBE [2] 1.5 psi (0,103 bar) PLATFORM [3] 5.0 psi (0,345 bar) PLATFORM [4] 5.0 psi (0,345 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

CYCLONE ENCLOSURE

Aquaglide

DISCONTINUED

Item Number: 585220104
SKU: 0790628042796
Dimensions: L 20' x W 15' x H 5.1'
(L 6,1m x W 4,6m x H 1,6m)

Box Dimensions:
L 30" x W 22" x H 12", 49 lbs. 1 pc.
(L 75cm x W 55cm x H 30,5cm, 22 kg)

The Cyclone Enclosure enables the Cyclone Wheel to integrate easily into any aquapark. Featuring six ports for users to exit the Cyclone Wheel, the Cyclone Enclosure also doubles as a balance beam challenge for users waiting for their turn on the wheel.



Includes:
- Cyclone Enclosure
- Repair kit

Not Included:
- Cyclone Wheel
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Enclosing the Cyclone Wheel feature.

Warranty:
3-year limited against any manufacturing defects.


Material:
0.90 mm / oz PVC weight


Construction:
Tubular - welded 3 layer seam

Mooring Diagram

Cyclone enclosure includes adequate weight to anchor wheel.
Cyclone Wheel can also be anchored separately

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

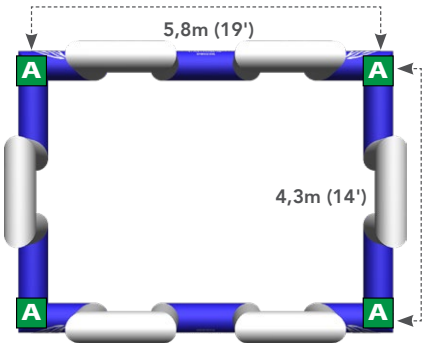

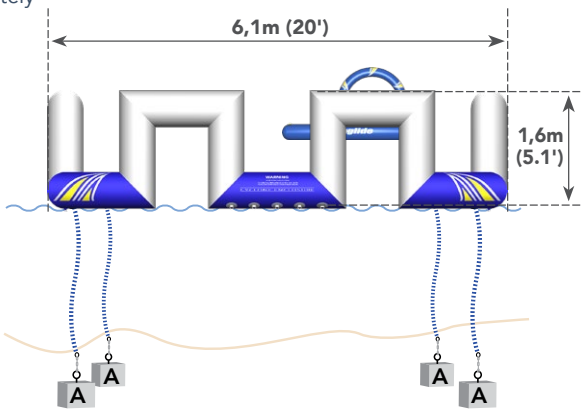

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,5m (4.9ft)	3,0m (10ft)	1000 kg (2000 lbs.)	250 kg (500 lbs.)	4	4	4	5 | 5	MAIN [1] 2.0 psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

CYCLONE WHEEL

Aquaglide

DISCONTINUED

Item Number: 585220103
SKU: 0790628042789
Dimensions: L 8' x W 8' x H 8.5'
(L 2,4m x W 2,4m x H 2,6m)

Box Dimensions:
L 17" x W 22" x H 9", 139 lbs. 1pc.
(L 75cm x W 55cm x H 23cm, 63 kg, 1 pc.)



The Cyclone Wheel's unique mesh design allows the wheel to act as a super soaker by cooling users as the wheel rotates. The Cyclone's inner mesh helps with rotation, while the free-floating feature allows for ultimate spinning in a human-sized version of a mouse wheel. Use as a standalone item or integrate into any aquapark with Cyclone Enclosure.

Includes:
- Cyclone Wheel
- 4 Straps
- Repair kit

Not Included:
- Cyclone Enclosure
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
An energy-burning challenge.

Warranty:
3-year limited against any manufacturing defects.

Material:
0.90 mm / 31oz PVC weight


Construction:
Tubular - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

Cyclone enclosure includes adequate weight to anchor wheel. Cyclone Wheel can also be anchored separately



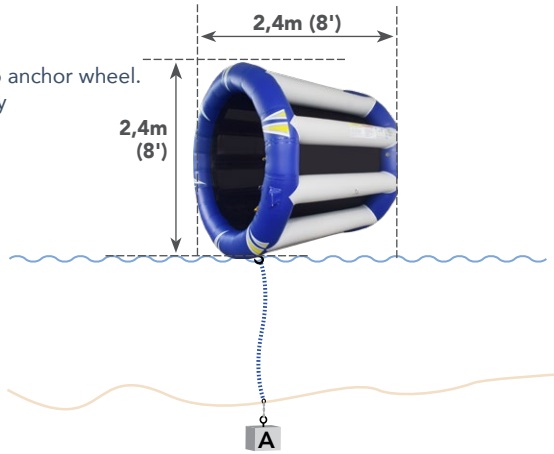

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	STRAPS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 | 4	363 kg (800 lbs.)	1,5m (4.9ft)	3m (10ft)	500 kg (1000 lb)	500 kg (1000 lb)	1	1	4	1	2 | 2	WHEEL [1] 2.2psi (0,152 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

MINI MONSOON CONE

Aquaglide

DISCONTINUED

Item Number: 585223101
SKU: 0790628046336
Dimensions: L 4' x W 4' x H 4'
(L 1,2m x W 1,2m x H 1,2m)

Box Dimensions:
L 35.4" x W 29.5" x H 19.7", 172 lbs. 1pc.
(L 90cm x W 75cm H 50cm, 78 kg)

The Monsoon is Aquaglide's patented system to keep parks clean and provide a continuous stream of cool water – now available in a compact size! The Mini Monsoon Cone is perfect for spot irrigating specific pieces, such as a large slide, that your Universal Monsoon doesn't reach.



Includes:
- Mini Monsoon Cone
- Spray Head w/ various nozzles, 30m (100') Hose
- Fittings
- Inline Monsoon Tee
- Garden hose shut-off
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump
- Pump

Recommended Items:
- Monsoon System
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For: Spot irrigation of specific/ difficult to reach surfaces or general irrigation of smaller parks.


Warranty: 3-year limited against any manufacturing defects.


Material: 0.90 mm / 31 oz Cx3

Construction:
Tubular - welded 3 layer seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



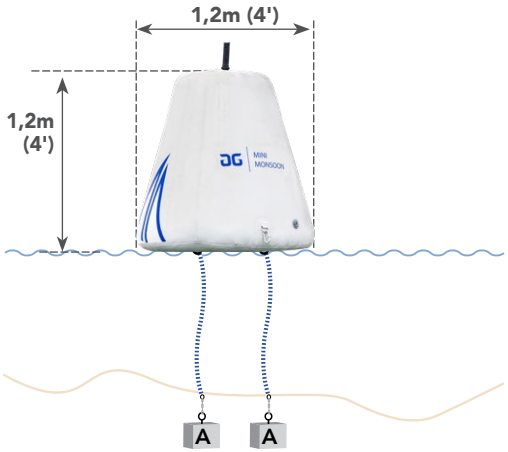

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	WORKING PRESSURE
N/A	N/A	1,0m (3.3ft)	3m (10ft)	200 kg (500 lbs.)	100 kg (250 lbs.)	2	4	2	MAIN [1] 0.50 psi (0,034 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

C-LOUNGE

Aquaglide

DISCONTINUED

Item Number: 585222157
SKU: 0790628046053
Dimensions: L 14.7' x W 14.7' x H 2'
(L 4,5m x W 4,5m x H 0,6m)

Box Dimensions:
L 36" x W 32" x H 14", 143.3 lb.
(L 90cm x W x 80cm x H 35cm, 65 kg)



As part of Aquaglide's Liquid Lounge series, the C Lounge offers something a little different. This C-shaped platform offers easy swim-up access, plentiful seating and an integrated cooler drop for 'chillaxing' in the sunshine! Easily accommodates up to eight users with spacious seating and comfy backrest. Use as a standalone VIP lounge or connect it to other Aquaglide park items or lounges on up to two sides with our Interlock system.

Includes:
- C-Lounge
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:
- Accelerator HP 12v 20 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Socializing, lounging, and sunning


3-Year Warranty:
Limited 3-year Lakefront / 1-year light Commercial


Material:
Welded dropstitch 15cm + 0.90mm Cx3

Construction:
Welded DS w/ tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.



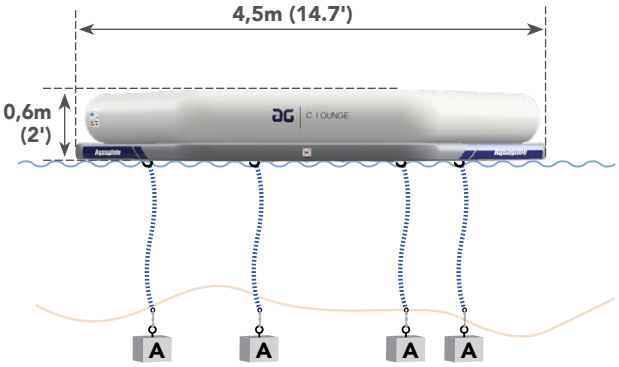

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
8 | 8	726 kg (1600 lbs.)	0,98m (3.3ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	Main [1] 6.0psi (0,414bar) Backrest [2] 2.0psi (0,138 bar) Backrest [3] 2.0psi (0,138 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential


REVEL LOUNGE

Aquaglide

DISCONTINUED

Item Number: 585221114
SKU: 0790628045056
Dimensions: L 10' x W 10' x H 7.44'
(L 3,05m x W 3,05m x H 2,27m)

Box Dimensions:
L 170cm x W 75cm x H 45cm, 90kg

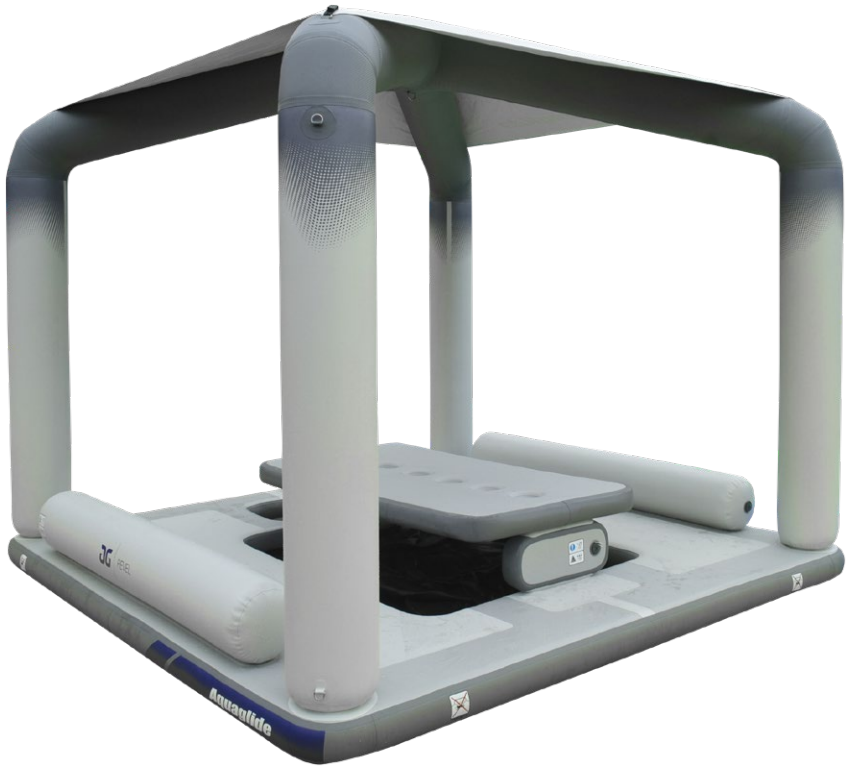

Featuring laid-back tatami-style seating around a family-size table, the Revel Lounge includes inflatable backrests and mesh-bottom footwell and cooler cutouts. The entire layout sits beneath a canopy top cover for added shade. The Revel Lounge accommodates six users and can be used as a standalone accessory or as a social space in any Aquaglide park layout.

Includes:
- Revel Lounge
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Vario Lock™ straps
- Inflation pump

Recommended Items:
- Accelerator HP 12v 20 Pump
- Aquapark 110v 7.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Socializing and lounging

Warranty:
Limited 3-year Lakefront / 1-year light Commercial


Material:
Welded DS 15cm + 0.90mm Cx3


Construction:
Welded structural tube construction with 3-layer seams

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. Weighted anchors can be either poured concrete or Aquaglide's Lakefront Anchoring System.

It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor anchored items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

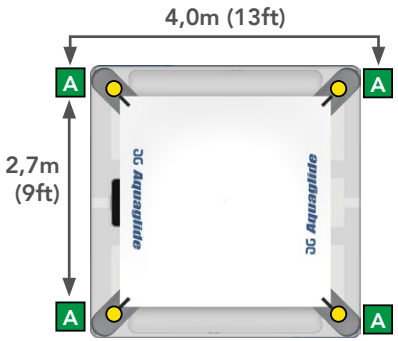

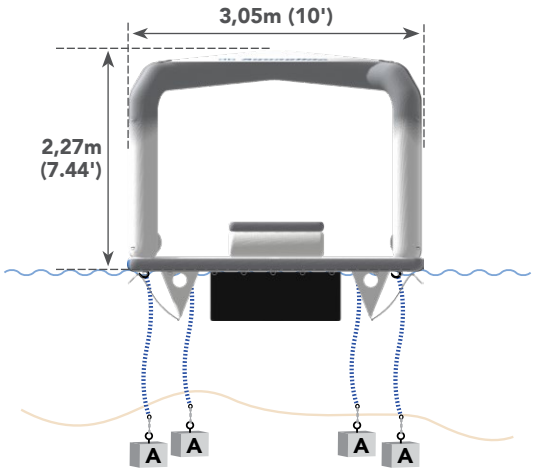

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 | 6	544 kg (1200 lbs.)	0,98m (3.2ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	7 | 0 | 7 | 0	Main [1] 6.0psi (0,414bar), Upper [2] 4.0psi (0,276bar), Base [3] 1.2psi (0,083bar), Table [4] 5.0psi (0,345bar), Seats [5] 2.0psi (0,138bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

LUGEWAY 20

Aquaglide

DISCONTINUED

Item Number: 585221105
SKU: 0790628044370
Dimensions: L 20' x W 5.2' x H 3.4'
(L 6,1m x W 1,6m x H 1,1m)

Box Dimensions:
L 46" x W 33" x H 21", 205 lbs.
(L 113cm x W 83cm x H 52cm, 93 kg)



This 20-foot straightaway challenges users and adds diversity to any aquapark layout. Built for speed, the Lugeway 20 challenges users to attempt to slide all the way across or works as a transition walkway to other features. The Lugeway 20 connects at both ends using Vario straps and fits any Aquaglide Aquapark Series configuration. The Lugeway is available to two sizes, the Lugeway 10 and the Lugeway 20

Includes:
- Lugeway 20
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

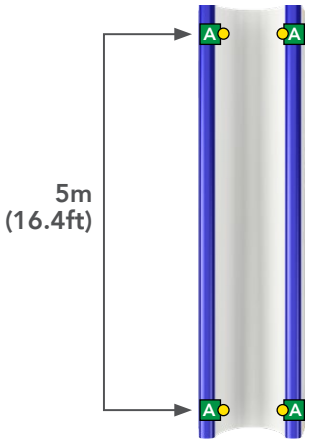

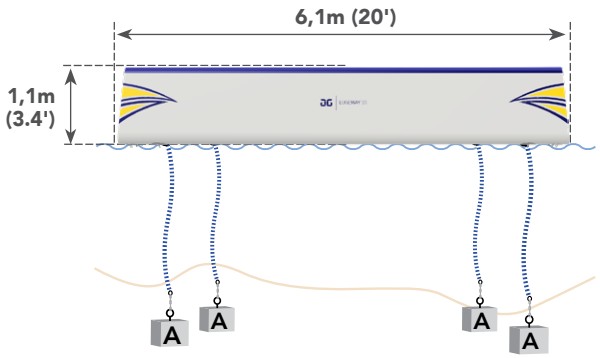

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2 | 2	181 kg (400 lbs.)	1,43m (4.7ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	Main [1] 1.5psi (0,103bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

LUGEWAY 10

Aquaglide

DISCONTINUED

Item Number: 585221104
SKU: 0790628044363
Dimensions: L 10' x W 5.2' x H 3.4'
(L 3,0m x W 1,6m x H 1,1m)

Box Dimensions:
L 36" x W 28" x H 12", 108 lbs.
(L 90cm x W 70cm x H 30cm, 49 kg)

A ten-foot luge straightaway built for speed, the Lugeway 10 works as a walkway—but ambitious users strive to slide all the way across. Connects at both ends using Vario straps and fits any Aquaglide Aquapark Series configuration. The Lugeway is available to two sizes, the Lugeway 10 and the Lugeway 20.



Includes:
- Lugeway 10
- Repair kit

Not Included:
- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Sliding and transferring to other features.


Warranty:
Limited 3-year Warranty


Material:
0.90 mm / 31 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor aquapark items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

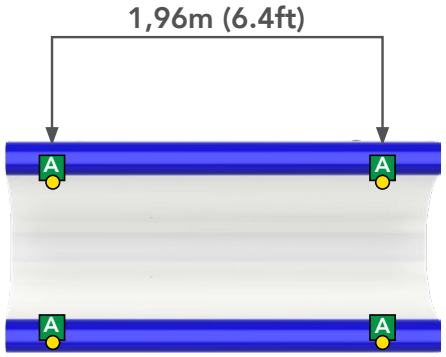

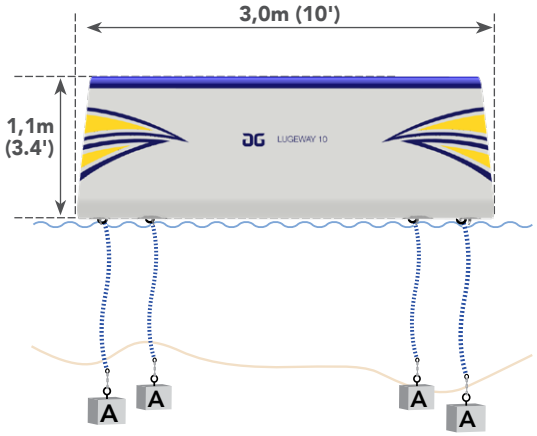

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
1 | 1	181 kg (400 lbs.)	1,43m (4.7ft)	3,0m (10ft)	400 kg (1000 lbs.)	100 kg (250 lbs.)	4	4	4	5 | 5	Main [1] 1.5psi (0,103bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential

SOAKER LOUNGE

Aquaglide

DISCONTINUED

Item Number: 585221119
SKU: 0790628045100
Dimensions: L 10' x W 8.8' x H 1'
(L3,05m x W 2,67m x H 0,32m)

Box Dimensions:
L 28" x W 16" x H 9", 37.5 lbs.
(L 70cm x W 40cm x H 22cm, 17 kg)

Made specifically for chillin' on the water with family or friends, the soaker lounge offers a little something for everyone. With four drink holders and a soaker mesh floor it's the perfect place for adults to enjoy a cool beverage, but it also makes a nice perimeter for younger kids to splash and play. Can be used as a stand-alone item or connected to any residential park on two sides.



Includes:
- Soaker Lounge
- Repair kit

Not Included:
- Anchor bags
- Mooring lines
- Inflation pump

Recommended Items:
- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:
Beating the summer heat with friends and family at the lake.

Warranty:
3-year limited Residential / 1-year light Commercial against any manufacturing defects.


Material:
0.70 mm / 25 oz.


Construction: Tubular

Mooring Diagram

* We recommend using Aquaglide mooring lines and weight recommendations as a starting point. Weighted anchors can be either poured concrete or Aquaglide's Lakefront Anchoring System.

It is the responsibility of the owner/ operator to consider the needs of their specific site, to monitor anchored items, and to make adjustments as necessary. Some circumstances may require additional weight or different types of mooring.

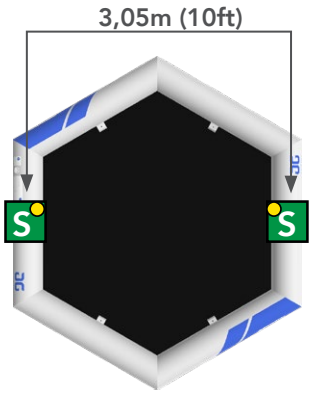

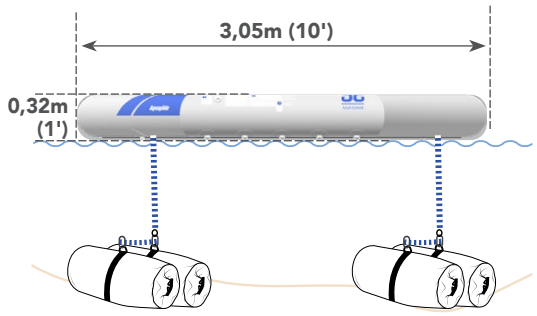

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG | LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M | FT	MIN. TOTAL ANCHOR WEIGHT	MIN. WEIGHT PER ANCHOR	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
5 | 6	363 kg (800 lbs.)	1,07m (3.5ft)	3m (10ft)	200 kg (500 lbs.)	100 kg (250 lbs.)	2	2	5 | 5	MAIN [1] 1.2 psi (0,083 bar)

© Copyright 2025 Aquaglide | Proprietary + Confidential



1.855.502.AQUA
1345 NW WALL ST SUITE 100 BEND, OR 97703